



Calhoun: The NPS Institutional Archive

Theses and Dissertations

Thesis Collection

1987

AdaMeasure: an implementation of the Halstead and Henry metrics.

Herzig, Paul M.

<http://hdl.handle.net/10945/22594>



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

<http://www.nps.edu/library>

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIFORNIA 93943 5002

NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

ADAMEASURE:
AN IMPLEMENTATION
OF THE HALSTEAD AND HENRY METRICS

by

Paul M. Herzig

June 1987

Thesis Advisor:

Daniel L. Davis

Approved for public release; distribution is unlimited

T233171

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a REPORT SECURITY CLASSIFICATION Unclassified			1b RESTRICTIVE MARKINGS		
2a SECURITY CLASSIFICATION AUTHORITY			3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; Distribution is unlimited		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE					
4 PERFORMING ORGANIZATION REPORT NUMBER(S)			5 MONITORING ORGANIZATION REPORT NUMBER(S)		
6a NAME OF PERFORMING ORGANIZATION Naval Postgraduate School		6b OFFICE SYMBOL (if applicable) Code 52	7a NAME OF MONITORING ORGANIZATION Naval Postgraduate School		
6c ADDRESS (City, State, and ZIP Code) Monterey, California 93943-5000			7b ADDRESS (City, State, and ZIP Code) Monterey, California 93943-5000		
8a NAME OF FUNDING/SPONSORING ORGANIZATION		8b OFFICE SYMBOL (if applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c ADDRESS (City, State, and ZIP Code)			10 SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO	PROJECT NO	TASK NO
			WORK UNIT ACCESSION NO		
11 TITLE (Include Security Classification) ADAMEASURE: AN IMPLEMENTATION OF THE HALSTEAD AND HENRY METRICS (u)					
12 PERSONAL AUTHOR(S) Herzig, Paul M.					
13a TYPE OF REPORT Master's Thesis		13b TIME COVERED FROM _____ TO _____		14 DATE OF REPORT (Year Month Day) 1987 June	
15 PAGE COUNT 184					
16 SUPPLEMENTARY NOTATION					
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP			
			Ada Metric; Data Flow Complexity; Ada Measure; Halstead; Henry		
19 ABSTRACT (Continue on reverse if necessary and identify by block number) A software metric is a tool that should be used in the development of quality software. The properties that define good software vary but encompass reliability, complexity, efficiency, testability, understandability, and modifiability. The Henry metric measures the complexity of data flow within a module and the complexity of inter-module communication. This thesis is an extension of a previous thesis titled 'AdaMeasure' that calculated the Halstead metric. The present design and implementation is a tool that computes the Halstead and Henry metrics for Ada programs.					
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a NAME OF RESPONSIBLE INDIVIDUAL Prof. Daniel L. Davis			22b TELEPHONE (Include Area Code) (408) 646-3091		22c OFFICE SYMBOL Code 52Dv

Approved for public release; distribution is unlimited.

AdaMeasure
An Ada Software Metric
Implementation of the Henry Metric

by

Paul M. Herzig Jr.
Lieutenant Commander, United States Navy
B.S.E.E., University of New Mexico, 1976

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN COMPUTER SCIENCE

from the

NAVAL POSTGRADUATE SCHOOL

June 1987

ABSTRACT

A software metric is a tool that should be used in the development of quality software. The properties that define good software vary but encompass reliability, complexity, efficiency, testability, understandability, and modifiability. The Henry metric measures the complexity of data flow within a module and the complexity of inter-module communication. This thesis is an extension of a previous thesis titled 'AdaMeasure' that calculated the Halstead metric. The present design and implementation is a tool that computes the Halstead and Henry metrics for Ada programs.

TABLE OF CONTENTS

I.	INTRODUCTION AND BACKGROUND	6
	A. DEFINITIONS	6
	B. SALLIE HENRY'S METRIC	6
	C. INFORMATION FLOW	7
	D. RELATIONS	9
	E. INFORMATION FLOW STRUCTURE	19
	F. INDICES OF MERIT	19
	G. MODULE ANALYSIS	21
	H. INTERFACE MEASUREMENTS	22
	I. THEORY SUMMARY	24
II.	DESIGN CRITERIA	25
	A. INTRODUCTION	25
	B. SPECIFIC ISSUES	28
	C. DESIGN ISSUES	28
	D. CONCLUSION	30
III.	DESIGN AND TESTING	31
	A. THE EMBEDDED CODE	31
	B. THE HENRY PACKAGE	31

C. THE HENRY ANALYSIS PACKAGE	35
D. THE HENRY DISPLAY PACKAGE	39
E. TESTING	41
IV. CONCLUSIONS	44
A. IMPLEMENTATION	44
B. THE FUTURE OF METRICS	45
APPENDIX A: INFORMATION FLOW MECHANISMS	47
APPENDIX B: HENRY METRIC CODE	52
APPENDIX C: MODIFIED PARSERS	90
LIST OF REFERENCES	181
INITIAL DISTRIBUTION LIST	182

I. INTRODUCTION AND BACKGROUND

A. DEFINITIONS

A metric is an assignment of indices of merit to programs in order to evaluate and predict software quality [Ref.1: p.6-2]. The qualities to measure are, at present, subjectively chosen but in general encompass reliability, complexity, efficiency, testability, understandability and modifiability [Ref.2: p.1-3]. The predictive nature of a metric allows it to be used to say "when" to proceed to the next phase in the software life cycle model. Another aspect of the predictive nature of a metric would be for it to provide management with a rough guess of the outcome of a particular path of development, provide an acceptance index, or provide an immediate feedback loop to the implementors while in the unit test phase [Ref.2: p.5]. How the metric is implemented will dictate its primary use from the above selections.

B. SALLIE HENRY'S METRIC

Sallie Henry's metric attempts to measure data flow complexity. It is intended to be used as a tool to establish a module's quality or to enforce particular modularization standards [Ref.2: p.6]. She argues that quality control of software is the result of software reliability and that reliability comes about through well designed modules that do not have complex data flow.

The hierarchical structure of a program should be layered modules. Each layer should function as a virtual machine and be composed of modules. This approach to modularization gives each module characteristics that can be exploited so that each module can be independently developed, more easily comprehended, assembled so that the system is more stable and designed so that the system is a great deal more flexible. This schema of development extols two primary tenets that are stated by D. Parnas in [Ref.3: p.339] and quoted here:

. . . provide the user of a module with all the information to use the module correctly, and nothing more. Provide the implementor of the module with all the information to implement the module correctly, and nothing more.

All this implies that a good design will have high module cohesion, good module strength and low module coupling [Ref.4: p.330].

C. INFORMATION FLOW

Information flow complexity is a twofold process the flow of data within a module and the flow of data external to the module. The measurement of these criteria is dependent on two premises: (1) that there is a capability to measure this data and (2) the data obtained can be used to evaluate software design. The seemingly obvious nature of the first premise runs into problems in implementation and applicability, but if it is accepted that the first deficiency can be surmounted, then the second part remains to be shown as reasonable. Applicability is a debated concept that is still not resolved. It revolves around whether the data gathered is related to the property under consideration. It is

further exacerbated by the human element that defines an environmental bubble and then programs within this bubble. How to measure this bubble without destroying its foundations is the problem of measuring human performance. The problem of what to measure is the problem of applicability.

The more specific the metric's application the less the applicability property is questioned, but, the problem of "what" to measure is still not clearly defined. This thesis will not argue the applicability question because the approach of Sallie Henry is reasonable and the results obtained from the metric appear to adequately encompass the area of data flow complexity. If the reader will accept that the properties measured are related to data flow complexity then the results obtained are also related to complexity.

The second premise is even more thorny. If the data is obtained and it seems reasonable can it be shown to be truly the result of the property under measurement? Any human endeavor will never be clearly and objectively quantified. Thus, the answer to the efficacy of the second premise is, proceed and maybe the amassing of results will eventually show the correlation.

The above analysis is far from a convincing argument to utilize metrics to measure programs however as this thesis was developed the applicability of measuring data flow complexity in order to determine code quality became more apparent although not proven. Nothing will be learned if no attempt is made to measure data flow complexity. This thesis attempts to measure data flow

complexity in the light of learning and the hope that the data gathered will prove the applicability of the process.

Consider first a simple module: a procedure in a structured language. Each procedure defines certain relations between itself and other procedures. These include:

- formal input/output parameters
- function call input and return data
- local data structures
- global data structures

These relations will generate a particular information flow structure similar to a hierarchical tree structure. This tree structure is peculiar to the procedure and will reflect its complexity of structure. It is reasonable to analyze this tree to determine derived calls, local data flow and global data flow.

D. RELATIONS

Some definitions are now in order. Global data flow exists from procedure 1 to procedure 2 if procedure 1 deposits data in the global data structure and then procedure 2 reads that data. Local data flow comprises direct and indirect species. A local direct flow, from procedure 1 to procedure 2, results when procedure 1 calls 2 passing parameters. An indirect data exchange from procedure 1 to procedure 2 exists if procedure 2 calls 1, which returns a value used by 2, or procedure 3 calls both 1 and 2, and passes an output value from 1 to 2.

Figure 1 represents data flow from procedure to procedure or from a procedure into a data structure. Parameter passing within this scheme is represented by the arrows. A hidden data exchange through modification of a variable is represented by the dashed flow arrow. Module A retrieves data from the data structure then calls B passing a parameter; module B updates the data structure. C calls D passing a parameter. D calls E with a parameter and E returns a value to D which is used by D and passed to F. The function of F updates the data structure.

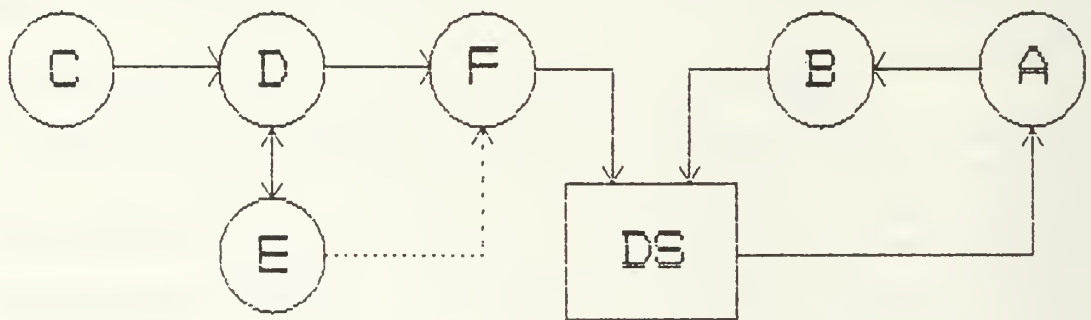


Figure 1. Data Flow Structure

The direct data flows represented are:

$A \rightarrow B$, $C \rightarrow D$, $D \rightarrow E$, $D \rightarrow F$.

These are simply the calls.

The indirect local flows are:

$E \rightarrow D$, $F \rightarrow A$.

The global flows are:

$B \rightarrow A$, $F \rightarrow A$.

Both B and F update the data structure while A retrieves data from the structure.

The implications of data flow for procedure and function calls will be discussed later with derived calls.

The calling notation $A(x) \rightarrow B()$ or $A() \rightarrow B(x)$ is used to connote a data flow transmission from A to B either by direct parameter passing or side-effect. In the first condition the variable x is returned to procedure A and in the second example the variable x is sent to B . A condition that leads the Henry metric to not detect a procedure or function call's data flow (labeled a missed call) is for the condition where $A(x) \rightarrow B()$ and variable x is a returned value from B not modified within procedure A 's code. An example of this would be a conditional statement within A that depends on the returned value from function B . The data flow detection problem leads to two key ideas, effective parameters and data utilization.

Calls that are detected by information flow analysis are dependent upon how the information is passed. If the conditions $A() \rightarrow B(x)$ exists where parameter x

is passed to B or condition $A() \rightarrow B()$ where no parameters are exchanged then the calls will not be missed if B receives information in one of the following formats:

- a formal parameter
- a data structure
- a constant
- an actual parameter from a third procedure whose value is modified within A prior to the call to B

An effective parameter will define the call structure in such a way that the data flow will not be missed. It is a parameter that receives information from one of the calling procedure's parameters, a data structure, a constant, or a third procedure's returned actual parameter that is modified within the calling modules structure. What the effective parameter implies is that side-effect data flow is difficult to effectively analyze. Another construct that will cause a missed call is the condition $A(z) \rightarrow B(x)$ where B is a function. This condition means A uses data from B. A uses data from B if (1) B updates a data structure used by A; (2) A receives a constant from B; (3) A receives an output parameter from B; or (4) B updates a return value to A. Thus information flow will be detected if A passes B an effective parameter or if A uses data from B.

Appendix A gives all the rules that are applicable to the data flow relationships. Some notation is now needed to simplify the descriptions that follow.

The form of a relation is $L \leftarrow R_1, R_2, R_3, \dots R_n$; where L is the resultant from the application of the relationships $R_1, R_2, \dots R_n$. An example would be:

$A.D3 \leftarrow A.D1, A.D2, A.constant.$

This series notation represents the code line that begins with $D3$ below.

```
A()
begin
.
.
D3 := D1 + D2 + 1;
end procedure A;
```

In words, the $A.D3$ means procedure A updates data structure $D3$ by first applying relationship $A.D1$ then $A.D2$ and finally $A.constant$. This format shows that data flows into procedure A 's data structure $D3$ from the noted relationships. A thorough discussion of the notation for the relations is given in Appendix A but a short discussion follows to aid in the immediate understanding of Figure 2.

The notation $B.1.I$ defines the first input parameter in the actual parameter list of procedure B and an O would refer to an output parameter. All possible data flow paths are considered even if a $B.1.I$ parameter is not an input parameter. Thus, if procedure B has an output actual parameter in position $B.1$ and the Henry metric attempts to analyze this parameter as an input flow an error condition would result from the attempted evaluation (depicted as $B.ERROR$). $B.NULL$ means that no relationship exists for this parameter or that there is no data flow into or out of the parameter being considered.

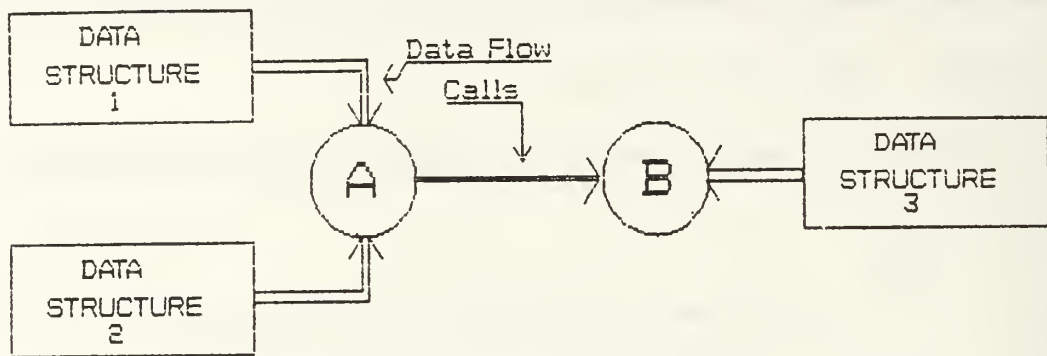


Figure 2. Data Flow With Call Structure

Code

```
A()  
begin  
  X := D1 + 1;  
  Y := D2;  
  B(X,Y);  
end;
```

```
B(P,Q)  
begin  
  D3 := P + Q;  
end;
```

Relations Set

A1 B.1.I <- A.D1, A.CONSTANT

A2 B.2.I <- A.D2

B1 B.1.O <- B.NULL

B2 B.2.O <- B.NULL

B3 B.D3 <- B.1.I, B.2.I

The relation sets were derived by looking at the data flow into and out of procedure A. That is, since procedure A has no parameters there can only be local data flows into or out of the procedure. These flows are described in terms of the procedure call to B. B.1.I stands for procedure B's first input parameter. This parameter is fed from procedure A's data structure D1 and a constant. Analyzing procedure B's second input parameter yields the A2 relationship. Relationship B1 describes the first parameter in procedure B as an output parameter to procedure A that receives no data for transfer. Relationship B3 describes how the two input parameters to procedure B constitute the data flow to this data structure.

The data flow analysis deals primarily with the analysis of parameters which are direct data flow and indirect data flow as defined above. Modifying Figure 2 and incorporating some local variables will illustrate some more data flow analysis techniques as seen in Figure 3.

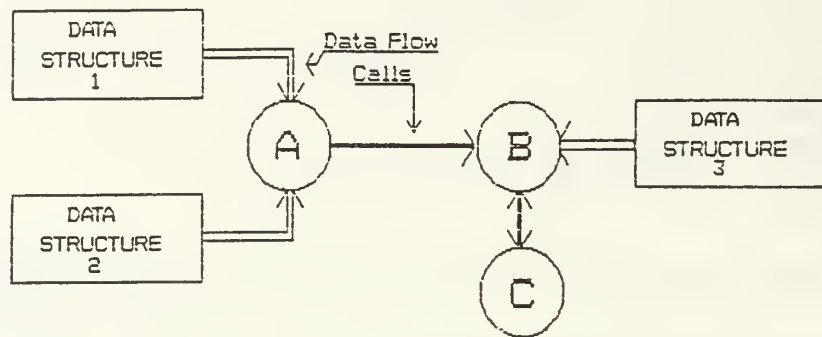


Figure 3. Data Flow And Inter-dependent Procedures

Code

```

A()
begin
  X := D1 + 1;
  Y := D2;
  B(X,Y)
end;

```

```

B(P,Q)
begin
  R := Q;
  C(P,R,S);
  D3 := S;
end;

```

```

C(I,J,K)
begin
  K := I + J;
  J := J + 1;
end;

```

Relation Set

A1, A2 same.

```
B1 B.1.O <- C.1.O
B2 B.2.O <- B.NULL
B3 C.1.I <- B.1.I
B4 C.2.I <- B.2.I
B5 C.3.I <- B.ERROR
B6 B.D3 <- C.3.O
```

```
C1 C.1.I <- C.NULL
C2 C.2.O <- C.2.I, C.CONSTANT
C3 C.3.O <- C.1.I, C.2.I
```

In the relation set B1 receives data from procedure C's output parameter. B2 is the same. B3 through B5 describe the parameter list of procedure C. However B5 denotes an error or a condition that is not allowed. That is, the data direction was in error as variable S is an output from procedure C as indicated by relation B6. It should be noted that this relation set building considers all possible data flow paths without regard to the possibility that the parameters could be assigned only particular directions as Ada formal parameters are. Figure 4 shows the effects of a function call.

Code

```
A()
begin
  X := D1 + 1;
  Y := F(X);
  B(X,Y)
end;
```

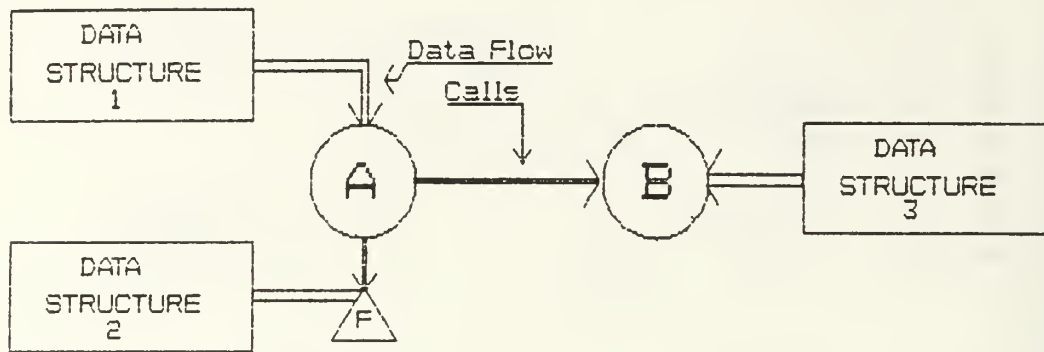



Figure 4. Data Flow With Function Call

```

F(M) return integer;
begin
  N := D2 * M;
  return N;
end;

```

Relation Sets are changed as follows:

```

A1 F.1.I <- A.D1, A.CONSTANT
A2 B.1.I <- A.D1, A.CONSTANT, F.1.O
A3 B.2.I <- F.O

```

```

F1 F.1.O <- F.NULL
F2 F.O <- F.D2, F.1.I

```

Relation A1 has changed to reflect the analysis of the function call to F. The input to the function call is analyzed as well as its output and any possible modification of its input parameter. This analysis can be seen to cover all possibilities of hidden data transfers except the missed calls described earlier.

E. INFORMATION FLOW STRUCTURE

Once the relation set has been built the relations are sorted alphabetically and stored for future use in the Information Flow Structure (IFS). A recursive algorithm is employed to build the information tree structure for the flow analysis. The IFS is then analyzed to find the derived calls, the local flows and, finally, the global flows.

The IFS will have leaves that are data structures; the root is the initial call from the highest level procedure. Each node of the tree will have the relational form of X.DS, X.O, X.k.I, or X.k.O. See Appendix A for all the possibilities of derived calls. The local flows are described in Appendix A as derived calls. The global flows for a particular data structure are all the possible paths from leaf elements of the form A.DS to the root.

F. INDICES OF MERIT

The calculations of the indices of merit use the idea that the complexity of a module comprises the complexity of the code plus the complexity of the connections of the code to other modules. The formula describing the complexity of a module is

$$\text{Complexity} = \text{length} * (\text{fan-in} * \text{fan-out})^{\text{code_index}}.$$

Length is defined as the number of executable statements. The expression fan-in * fan-out represents all the combinatorial possibilities for each input to produce an output. The code_index is an exponent that represents the code

difficulty. Nominal code difficulty for operating systems is 2. This index needs more data for other types of programming.

The purpose of this computation is to produce comparative numbers of merit that point out and isolate specific areas within the code that have the potential for problems. A high fan-in/fan-out implies a large interconnection to outside modules. This leads to the assessment that the code in question is most likely not properly modularized or, more succinctly, that the code has more than one function. The other form of data flow is global data flow to data structures. It is calculated as follows:

$$\text{Global flow} = \text{write} * (\text{read} + \text{read_write}) + \text{read_write} * (\text{read} + \text{read_write} - 1)$$

The term write refers to a change to the data within the structure through an assignment statement and a read is an access to the data structure that does not change the data. The identifier read-write is the sum of reads and writes. A high global flow implies overworked data structures and represents a stress point in the program. A stress point is the weak link in the chain. The presence of high flow is not automatically an indicator of poor programming but it is a juncture in the program that is highly susceptible to problems. Once the metric has assembled all the different components, such as fan-in or global reads and calculated the above equations it performs module analysis.

G. MODULE ANALYSIS

Module analysis revolves on the outputs of each of the above equations and their respective components. The numbers generated are symptomatic of certain problems. The analysis is first conducted with the equations output defining the particular categories of problems then the components refine the analysis. Examples of the first level of analysis follow:

A high global flow calculation implies an overworked data structure. These structures are overworked because of the need for continuous accessing. This implies a better decentralized design is in order, that is, distribute the information to the procedures that it serves. A high module complexity index indicates not enough modularization. This number is to be treated with respect but should be analyzed in context with global data flow. Together these indices represent the in's and out's of the modules data. A corrective action based solely on complexity should be avoided. A procedure should be analyzed for singularity of purpose and non-duplication within a module. Simply put, a procedure should be in one place, have one purpose and have minimal external references. These properties are quantified by the Complexity and Global flow metric numbers.

Next the interim cases where one aspect is high and the other component is low. A module with high global flow and low complexity shows poor internal structure. This structure will most likely have excessive numbers of procedures with extensive use of data structures outside the module. Low global flow with

high module complexity implies either poor decomposition into procedures or extremely complicated interface.

H. INTERFACE MEASUREMENTS

Interface between procedures comprise protocol interface, coupling and binding of procedures. Protocol interface from module A to B is defined as those procedures that are not in any other module and which receive information from A for passing to B. Binding is the sensitivity measure between modules, that is, tightly bound modules have a high sensitivity. A tightly bound module is difficult to change without adversely affecting the other module. Coupling is the strength of binding. Figure 5 depicts the interface structure.

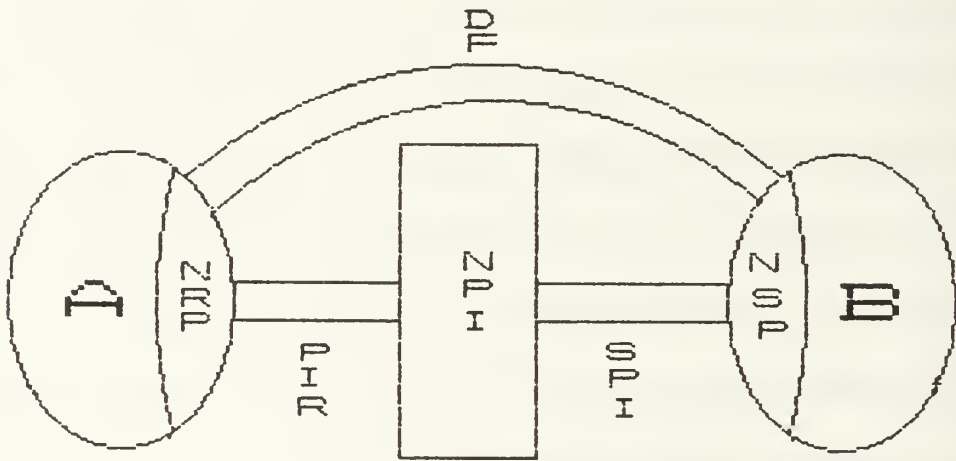


Figure 5. Interface Structure

Protocol interface, since it is not symmetrical between procedures, requires the construction of a tabular cross reference table with all possible procedures on both the X and Y axes. The internals of the table are the data flow complexity indexes for one way transmission from each procedure to the other.

Figure 5 shows that binding is sectioned into five components; the number of procedures sending information from A (NSP), the number of procedures receiving information from B (NRP), the number of procedures in the protocol interface (NPI), the number of paths to the interface from A (SPI), and the number of paths from the interface to B (PIR). The Direct Flow paths represented as the outer loops are data transmissions without the interim procedures. [Ref.2: p.85] lists the binding calculations as follows:

$$\text{Binding} = (\text{NSP} + \text{NPI}) * \text{SPI} + (\text{NPI} + \text{NRP}) * \text{PIR}$$

The term $(\text{NSP} + \text{NPI}) * \text{SPI}$ is the coupling strength.

All the direct path binding is calculated by

$$\text{DF Binding} = (\text{NSP} + \text{NRP}) * \text{DF}$$

Modules that are tightly bound are extremely difficult to maintain and modify. This difficulty stems from their lack of independence and the "ripple effect" of changes to one module flowing into the other.

I. THEORY SUMMARY

The purpose of the Henry metric is to provide designers and implementors with a method to quantify the quality of the code that they are developing. The goal is to produce reliable code that is interconnected in as logical a fashion as possible. Information flow complexity produces reliability through enforcement of design rules that lead to well connected code. The measurements will point out lack of functionality, improper modularization, poorly designed modules, poorly designed data structures, system stress points, inadequate refinement, strength of binding, modifiability, missing levels of abstraction and, will produce comparative indices to assess changes.

II. DESIGN CRITERIA

A. INTRODUCTION

The design of the implementation of the Henry metric was a two step process. First, a thorough understanding of the previous work by Neider and Fairbanks [Ref.5: pp.1-164] was undertaken to determine what data were available for importation into the Henry metric. The intention of the study and the basic design issues are (1) modify the output of the parser portion of their thesis to include the necessary data passes to the Henry metric (2) to initially analyze only the Ada package as a unit (3) encapsulate as much of the Henry metric into one Ada package as possible and (4) calculate the necessary Henry metric numbers transparently to the user but present the user with an output that is easily understood.

The underlying premise, of this program, is that the code presented for analysis has been successfully compiled. If the code does not compile and is presented to the parsers it will most likely fail to parse but in the event it does escape detection it will be erroneously analyzed.

The design criteria of encapsulation of the Henry metric was modified during the implementation due to the unwieldy length of the code. The division yielded three packages; one that holds all the global data, another for the analysis portion and a third for the interface to the user. Although this division violated one of

the basic design issues it was necessary in order to achieve solid data transfers between the Naval Post Graduate School computer and the Naval Weapons Station computers.

While the level of what was available from the parsers was being determined the data structures of the Henry metric were being laid out. The data structures and data gathering procedures for the Henry metric were designed to be as simple, yet as flexible as possible. Once the layout of the linked list data structure to hold the raw information for the Henry metric was decided upon, the tedious procedure of inserting the appropriate calls to the Henry package was undertaken. Basically, this reduced to exercising all the possible data flow characteristics from function or procedure calls that the Henry metric could expect to encounter and then ensuring that an appropriate call to the Henry data collection procedure was placed in the Neider/Fairbanks parser.

Next, the analysis procedure was designed. The analysis was separated from the display because computers have very different capabilities in their output devices. The first package analyzes the collected raw data and the second displays the finished, smooth data.

The program is menu driven. It initially gives the user a choice to parse a new program or view old data. If the parse choice is selected the parsers feed both the Henry and the Halstead packages with data. After a successful parse the user is presented with a choice of either viewing the Halstead or Henry metric data. This is when the analysis portion of the Henry metric is called. It is not

until the user decides which data to view is there a distinction made as to how to process the parsed data. This feature was designed for several reasons:

- Use the Halstead metric to refine the code
- then analyze the code via the Henry metric for data flow
- but the user should still have the option to select either metric

The data for both metrics are essentially different as are the purposes for gathering the data but the final goal of this dual metric system is to produce good code.

Finally, the presentation data module was designed. The Halstead and the Henry metric both produce numbers which are essentially meaningless unless a thorough understanding of the particular metric implementation is undertaken. Thus, both metrics, in differing fashions present "help" data to aid understanding of the metric output. These files are both verbally and graphically presented to the user.

The overriding design issue was to modularize the Henry metric as much as possible. The most significant exception to the Parnas' ideal [Ref.4: p.330] are the numerous calls to the data gathering procedure from the parser modules. These calls depend on details of how the data will be analyzed in their sequencing and data passing scheme. A conscientious effort was made to minimize global data and isolate procedures into nearly stand alone modules.

B. SPECIFIC ISSUES

The housekeeping routines of the global package are used to adjust the parsed data into a more palatable form for the analysis and presentation procedures. The output from the parser is stored as a linked list of raw data produced by procedures `WRITE_HENRY_DATA` and `CREATE_NODE`. This data is then analyzed by the `ANALYSIS PACKAGE` for the particular data constructs that represent a data flow. The output is an array of tabulated data that is a set of all the relations necessary for the Henry metric to detect local and global data flow.

The display module presents data in a tabular format or as a graphical representation for relative merit analysis. The intent was for the user to see the effect of changes, or to select a more verbose description of the meaning of the results. The modules that accomplish tabular and graphic displays are separated again because of the varying capabilities of machines. The purpose of these procedures is to provide some form of relative measure to the user so that the improvement or results of a change could be more objectively weighed. The overall purpose of the display modules is to show the data in such a fashion that an intelligent assessment is possible.

C. DESIGN ISSUES

Design issues encountered in the implementation of Henry's metric involve the efficient use of the Ada language's structures and data analysis techniques. Sallie Henry developed a metric process in which the constructs of a particular

language are ignored or not put to specific use. That is, some languages have extremely thorough type and range checking facilities. This is not considered in the basic design of her metric. These powerful features are incorporated in Ada and provide the application programmer more analysis capability.

This design issue concerns the collection of 'all possible paths' data for analysis of actual parameters. The approach taken by Henry is biased to a language where input, output, and combination input output parameters are treated as if they could be modified by the particular procedure regardless of their type. Ada is very picky about the manipulation of formal and actual parameters and goes to great lengths to ensure that parameter consistency is maintained by means of strong type/range checking. The explicit declaration of a parameter type was used to select which component of the complexity equation should be updated. The appropriate fan-in or fan-out number was also correctly updated from default declarations such as the undeclared default formal parameter.

The data analysis technique issue encountered was the need to analyze the data via the IFS. Henry's IFS was designed so that a traversal of its nodes analyzing parent-child pairs will capture all the transitive relational data flows. The transitive flow analysis designed into the present parser will account for the first two layers. The reasoning behind this approach stems from a program review. This review, albeit not extensive, was conducted looking for the predominant use of transitive relations. The review revealed that transitivity is not often used and if used is at most two layers deep. There was little use of deep

transitive constructs. Thus, the design approach selected will detect the majority of the transitive data flow paths without the need for an extensive tree structure. The "normal" program has few transitive relations but the capability to analyze this style of program would add more accuracy to the metric.

Another design anomaly of the metric is the problem of detecting the difference between a function call outside the package declaration and a global data structure manipulation. Ada libraries or packages inhibits the proper analysis of a function call as opposed to a data structure read unless a full compiler's output is available. The present metric was designed so that local function calls (within the package being analyzed) are properly valued but the function calls outside the package are treated as data structure manipulations or more specifically as global data flows.

D. CONCLUSION

The design and implementation phase was driven by the analysis of the Neider/Fairbanks parser portion of their thesis followed by the modularization of the Henry metric. The tradeoffs considered were: the strong typing and range checking of the Ada language, the need for an information flow tree, the need for relative output for the user and, and most importantly the desire to incorporate all of the Henry metric into one Ada package.

III. DESIGN AND TESTING

A. THE EMBEDDED CODE

The previous work done by Neider/Fairbanks had to be modified to output the necessary data for the Henry metric. This was accomplished through embedding calls to the `Write_Henry_Data` procedure in `Parser0`, `Parser1`, `Parser2`, `Parser3` and `Bypass_Function` (See Appendix C). The writing of the Lexeme, or identifier's name, was controlled by a Boolean that was turned on or off according to the position of the parse of a particular package. The design criteria was to keep the data gathering as simple as possible. If time permitted, a more thorough and sophisticated scheme could be developed. The embedded code was thoroughly tested by two test harnesses that simulated a series of `Current_Token_Records` in the form of an input Ada package.

B. THE HENRY PACKAGE

The first package to be implemented was `Henry.pkg`. It was conceived to be a stand-alone construction that would initialize the data collection process, receive data from the other parsing packages and store the raw incoming data in a linked list. (See Appendix B). Minimal variables and foreign procedures from other packages are used. The Henry package's only "withed" packages are `TEXT_IO`, `HENRY_GLOBAL`, `HENRY_ANALYSIS` and `HENRY_DISPLAY`. This

approach was considered necessary so that the subsequent changes or upgrades would not affect other modules (ripple effect). The design was to implement a basic Henry metric first for Ada packages then to improve and more fully develop the Henry analysis techniques if time allowed. The Main Menu module sequences the user into the analysis and display support packages. The modularization was considered necessary because the analysis and display packages are separate entities and the separation will ensure maintainability.

The initialization is conducted by procedure `Initialize_Henry` and the declaration statements that assign initial values to various Boolean variables. `Initialize_Henry` creates two head nodes, one for the raw data linked list, the other for the procedure or function length records. The raw data linked list storage is a straight line of `Henry_records`. These records have five fields that identify whether this is (1) local or global declaration, (2) the variable/procedure's name, (3) an action class, (4) a parameter class and (5) a pointer to the next record. The action class is comprised of various identifiers that range from procedure type to end parameters declare. Their purpose is to delineate the actions within the parsed program so that the Henry analysis package can look for the data flow. The parameter type field is used to define input, output or combination input output formal parameters. The variable `Henry_Line_count` is purposely initialized within this procedure to draw attention to its initial value. The array of length records is initially a parallel construct not directly tied to the procedure or function it holds the data for. In the analysis package a sequential process is

produced where the records are linked to the data manipulation array. The purpose of the length record is to hold the begin and end line counts of each procedure or function. These line counts are used later to compute the specific modules length for inclusion in the complexity equation.

The receipt of incoming data is accomplished primarily by `Write_Henry_Data`. This procedure is supported by a boolean `Write_Henry_Enable`. This boolean turns on or off the recording of the incoming records from the `Get_Current-Token_Record` procedure. Specifically, the boolean will allow recording only selected data from the incoming record stream selected by the place within the recursive descent parser that the boolean is activated. This control is necessary to pick and choose the data that is critical and to ignore the remainder.

The procedures `Create_Node` and `Clear_Henry_Lexeme` support the data gathering scheme. The "in out" pointers within `Create_Node` serve the purpose of allowing a view of the last record in the incoming stream or to work on the current record. It is arranged so that `New_Node` points to the newly created blank record and `Last_Record` points to the just filled in trailing record. Procedure `Clear_Henry_Lexeme` is necessary because of the way Ada handles strings. `Create_Line_Node` procedure functions identically to `Create_Node`.

The incoming data is chosen from within the `Bypass_Function` and from `Parser0` to `Parser4` [Ref.5: pp.102-160] by where the calls to the `Write_henry_data` procedure is positioned. The purpose of this approach is to assure the Henry

metric receives sufficient information but more importantly that the records written into the linked list are delimited in a particular fashion for ease of analysis. There is still considerable data that can be collected for analysis from the parsers but the Henry metric is not to the stage of development where it would be useful. The added depth of information could be used in two areas; analysis and a more informative output from both metrics.

The `Write_Henry_Data` procedure selectively enters the field data into the raw data linked list records as dictated by the incoming actual parameters. That is, the incoming data has default settings but if the data is to be ignored then the "null setting" is passed as an actual parameter. This assists in the gathering process. The design of the data gathering modules is such that modifications could be easily implemented. This was purposely designed into them so that upgrades would be fairly painless.

The `Henry.pkg` was constructed with modularization and maintainability in mind. It was meant to be a stand alone entity that receives data from the `Neider/Fairbanks Bypass_Function` and `Parser` packages. It performs the functions of initialization, data receipt and data storage besides defining the data structures used throughout the Henry metric packages. There are a number of improvements that could be added to the actual parameter analysis. These improvements all concern the wealth of options Ada provides in parameter passing schemes, such as, aggregates, dot notation to access hidden variables and allocators. Further, the present Henry metric does not analyze the incoming

actual parameters for expressions but the variables are all considered for inclusion in the complexity calculation by the transitivity analysis.

C. HENRY ANALYSIS PACKAGE

The Henry Analysis package comprises three procedures to set up the raw linked list data and a fourth procedure to actually analyze the code for metric calculations. The Analysis procedures are called sequentially from the Henry package and function as support for the Henry package. They operate on the data in sequential discrete steps. They first determine the formal parameters, then search and identify procedures and variables and then determine the metric numbers. The approach used was to nibble each piece of the tremendously complex data flow calculation down into minute sub-steps until all that is left is to simply count the marks on each record for determination of the complexity or global flow metric numbers. This approach removed the necessity for an arduous single pass calculation.

The set up procedures are `CLEAN_UP_HENRY_DATA`, `SET_UP_HENRY_ARRAY`, and `SPRUCE_UP_HENRY_DATA`. A support function, `LOCAL_NAME`, assists in the setting-up process. These procedures' end product are two metrics, the complexity metric and the global flow metric.

The `Clean_Up` procedure ensures that all parameter type records have all their fields properly filled. It scans for their parameter lists all the procedures and functions that are declared in the analyzed package . The field of most

importance is the classification of either "in, out or in-out" type parameters. These fields are checked up to the colon delimiter within the formal parameter list and then entered into all parameter_type records correctly.

The Set_Up procedure scans through the entire linked list setting up another array of pointers to facilitate the analysis process. The Henry_Array records have identifier, beginning pointer and line_length record pointer entries. This procedure's purpose is to break up the long linked list into another array. It actually does not sub-divide the list it merely arranges an array of pointers into the linked list that delineate each function or procedure. The resulting array is called the Henry_Array. The line length record pointers are records that hold the stop and stop line numbers. These records are eventually used to compute procedure/function lengths.

The Spruce_Up procedure goes through the Henry array data and sorts out the local and global data flow paths. It does this through the use of the LOCAL_NAME function. This function searches either the Henry array for a particular procedure name or the package and appropriate procedure's declaration sections for the variable name in question. Its purpose is to sort out the local procedure or function calls from the global data structure manipulations. It cannot completely solve this problem but defers final resolution to the Calculation procedure.

The Calculate_Metric procedure will again process the Henry array data looking for the final resolution to local procedure or function calls as opposed to a

global data structure manipulation. It proceeds in small increments to finally arrive at the complexity metric calculation and a global data flow calculation. The complexity metric number is arrived at by first considering all the in, out, in-out formal parameters to calculate the fan-in and fan-out numbers. After the initial cut the fan-in, fan-out numbers are incremented upward by the numbers of identified procedure actual parameters that feed these formal parameters and then by the the Transitivity_In and Transitivity_Out functions.

An example of this process would be for procedure A with formal parameters X, Y. First process parameters X and Y for their explicit type adding 1 to fan-in if its an input parameter or 1 to fan-out if its an output parameter. Next process all the assignment expressions looking for a modification of the formal parameter. If procedure A modifies parameter X prior to a call to another function increment the fan-out count by the number of statements after the assignment delimiter. Then go through an analysis of transitivity incrementing fan-in or fan-out accordingly. Finally, call up the appropriate record of Henry_Line_count and calculate the length of the procedure or function in question.

The equation that the process is working toward solving is:

$$\text{Complexity} = \text{length} * (\text{fan-in} * \text{fan-out})^{^2}$$

This equation represents the local data flows within the analyzed procedure. Sallie Henry set the exponent of the bracketed expression to 2 because of her experience with operating system code analysis. This program will continue with

this number until enough data can be compiled to support a change. Once this calculation is done then the global data flows are analyzed.

The global flows are arrived at by first eliminating all other possibilities. Then the remaining choices have to be foreign data flows. This process is started in the Spruce_Up procedure and completed within the Metric_Calculation procedure. The process is used to find whether the data structure is being read from or written to or both.

The equation that the analysis is striving to solve is:

$$\text{Global flow} = \text{write} * (\text{read} + \text{read-write}) + \\ \text{read-write} * (\text{read} + \text{read-write} - 1)$$

This equation represents how and by what means the global data structures are manipulated. The global data analysis procedure goes across procedure or function boundaries whereas the previous complexity metric calculations remain within the particular procedure or function under scrutiny. This across-the-border calculation is accomplished through the text file that is discussed next.

Within the calculation procedure the initial entries for the display package are started. This amounts to constructing a text file of descriptive terms and indices of merit for output in the Display_Package. It also provide a temporary storage bank for the global data information. This across-boundary analysis of

global flows was necessary because of the implications of not being able to detect the difference within the Ada code of an access to a data structure or a function call to a "withed" package.

In summary, the Analysis package is a series of analytical steps. The purpose of these steps is to arrive at the complexity and global flow metrics. These indices and additional data are stored in a text file for output to the user within the Display package.

D. HENRY DISPLAY PACKAGE

The Henry Display package is the user interface portion of the metric program. It provides the user with four different aspects of viewing the analyzed data. The purpose of this package is to show the user the data flow characteristics of the particular parsed input program. The output data will be the fan-in, fan-out, length, complexity, and four global flow numbers. These numbers can be presented in a listing format, viewed with a help file of informative paragraphs or compared by means of the other portions of the analyzed package to gain a relative sense of merit.

The procedures that comprise the Display package are `LIST_METRIC_DATA` and `WRITE_RELATIVE_DATA` and `GRAPH_RELATIVE`. The `LIST_METRIC_DATA` procedure will output the data file compiled while in the calculation portion of the previously discussed package. It will be a straight listing of information that will be grouped by each

element in the calculation of the complexity or global flow numbers, such as all procedures are grouped under the head of FAN-IN. The purpose of this listing is to show each procedure or functions component figure in the calculation of the final complexity and global figures. If the programmer is in a compile, test, edit, recompile mode of operation this will provide a spotlight on where to improve the data flow "choke- points". These data flow critical points will be seen as either high global flow or high complexity numbers. In short, the LIST_METRIC_DATA is designed for a more sophisticated programmer wishing to edit-and-run and see the results of particular programming style changes.

The WRITE_RELATIVE_DATA display will provide the same format of data but the numbers will have been normalized. Accompanying each number set will be a short narrative keyed to the relationships of the particular numbers. That is, if the user sees a complexity number of 125 beside the procedure X he will be provided with an explanation that that number is not too far out of line in comparison to the other procedures or functions analyzed within this package. The purpose of this approach is to normalize the output numbers to provide a relative comparison for a more user friendly approach to the mysterious metric number generation.

There is an additional procedure within the Display package that provides a complete listing of the raw input data. This procedure will most likely be of no use to anyone except those programmers who are extremely interested in the factors that lead to the particular numbers presented.

The final package for viewing the data is the graphical presentation module. It takes the relative data and manipulates the floating point numbers to achieve a bar chart display.

In summary, the Display package will provide the user with information in a variety of formats so that he can reach a conclusion from relative merit or absolute input numbers. The data flow numbers will point out the critical data flow points within a procedure so that the programmer can better see where to improve or expend the most effort. The purpose of the output data is to show the user where to improve, not how to improve.

E. TESTING

The testing of the design was conducted as the modules were being built and at the integration step prior to the final product. This was accomplished through the use of test harnesses that simulated the particular module's inputs and through test input programs that were hand analyzed to verify the metric's outputs.

The testing of the Henry package was accomplished by gradually building a more thorough test harness as each previous test was successful. The final test harness encompassed over 200 input records that simulated a myriad of token record inputs. The testing of the Henry module presented some difficulty because it is so intimately tied to the parsers. This was overcome by simulating the Bypass Support package as a partial input and the test harness as the balance of

the test vehicle. The package performed well within the test harness and functions adequately within the context of the entire program.

The testing of the analysis package of the Henry metric again was an iterative build of the harness. The testing accomplished after all the Henry metric packages were integrated was accomplished on the same group of programs provided by the NWC programmers to test the Halstead metric integration. The harness testing was comprised of a 50 step program that simulated a package with three independent procedures/functions utilized within its scope. There were intentional references outside the scope of the test harness package to determine if the global call detection scheme functioned properly. In all, the test harness exercised every possible data flow scheme analyzable by the Henry metric including one that would be a missed call. The analysis package performs adequately within the scope of the harness. Testing revealed that the code within the analysis phase was non- reentrant which required a the use of a boolean to define the status of the call to the package. This boolean will protect the data structure and effectively make the code reentrant.

The display module was tested with the same driver harness as the analysis package. The results were used to fine tune the package and to debug the problems. The process used was to call the analysis package from the display package and drive the display package with the test harness. This is also how the integrated program performs. The results were adequate from the stand point of the test harness but need some refinement when using the whole program.

The summary of testing would be extensive use of complicated test harnesses. Since a test harness has to simulate all the inputs to a module that the tested code could possibly see during integration, they are difficult to build much less debug. The debugging problem comes from the question 'is it the code or is it the harness?'. The test harness approach is quite fruitful from two orientations: (1) it forces the programmer into a thoroughly understanding his code and (2) the harness construction will lead the programmer into optimizing his code. Why doesn't the programmer already understand his code? He does but the ramifications of a certain approach does not come surface until the design of a test harness is considered. The optimization is driven by the need to get accurate, fast results so that the troubleshoot-repair-compile-troubleshoot regimen can proceed fairly rapidly. This is a real concern with the tremendous

IV. CONCLUSIONS

A. IMPLEMENTATION

The Henry metric was implemented in as modularized a fashion as possible. The intent was to allow for improvements through a more thorough use of the parser's information in AdaMeasure's first revision. Also, certain aspects of the Henry metric were not implemented, but it is now felt that they would add depth to the analysis process. In particular, the first change should be that the Information Flow Structure be added. This tree-like structure will allow the analysis of hidden calls but will still not detect the missed call problem discussed earlier. The missed call problem will most likely only be solved through the use of the Program Counter Register, but this approach defeats the idea of a high level language. The final improvement would be to add analysis of the "withed" packages so that an interface table could be constructed.

The program was incorporated into the previous work by Neider and Fairbanks. Their work was extensive and deserves favorable mention because it made the implementation of the Henry metric considerably easier. The output of the program is still in need of sophistication and improvement. In particular, two improvements are needed: (1) explaining the theory behind the metric and (2) conveying the ideas to the user. For an example, a high global data flow indicates an overworked global data structure. What should the metric present to the user?

The average programmer might not see the relevance of this and would miss the indication that a critical point in the data flow should probably be revised.

B. THE FUTURE OF METRICS

Metrics are tools. They point out areas of weakness. The metric will show a direction to proceed even in the absence of an absolute answer as to the correctness of the analyzed code.

The importance of metrics will grow as the size of programs grow. We do not know how important metrics will become but it does seem clear that there is a need for something that helps improve code quality and is fairly painless to use. The emphasis on "good" code will continue to be in the forefront of the Armed Service's concerns because of their intense involvement in real time embedded programs. These programs present a real challenge for incorporation of changes, improvements or any other form of maintenance programming. The purpose of metrics in this environment would be to point the way to good modularized design.

The metric should be part of the test scenario besides being an integral member of the life cycle of the program. The metric will force quality control without the painful process of formal inspections. The formal process has its place but the metric tool could perform more than the inspection. The metric tool should be incorporated into the test cycle as a meter of improvement. This immediate feedback to the programmer will be beneficial. The manager could

also use the absolute number as a goal for acceptance. This approach will provide the manager with the data needed at decision points in the life cycle of a program. The absolute number could also be tied to the program throughout its life as a measure of improvement or degradation over time. The uses are many, as the reader can see. The importance of the metric cannot be overstated when the future holds programs that will span millions of lines of code.

Metrics are important. They hold out the hope of an automated tool that will guide, interpret, and assess progress for programmers and management alike. I hope that the work of this metric will assist in advancing metrics and the use of the Ada language.

APPENDIX A: INFORMATION FLOW MECHANISMS

MECHANISMS FOR INFORMATION FLOW ANALYSIS

As Sallie Henry so succinctly states:

The information flow analysis takes place in three phases. The first phase involves generating a set of relations indicating the flow of information through input parameters, output parameters, returned values from functions and data structures.

General Format of a Relation

The generation of relations is first prefaced with a quick review of relational format.

$L \leftarrow R_1, R_2 \dots R_{count};$

Where L may be in any one of the following forms:

1. $P.DS$ P is the name of a procedure and DS the data structure.
2. $P.O.$ P is the procedure name and O is the return value.
3. $P.j.O$ P is the procedure j is an integer representing the formal parameter position, and O is the j th Output parameter.
4. $P.j.I$ P is the procedure, j is an integer representing the j th parameter, and I is the j th input parameter.

R_i may be in one of the following forms:

1. $S.DS$ S is a procedure name and DS is the name of a data structure.
2. $S.O$ S is a procedure name and O is the returned value.
3. $S.j.I$ S is the procedure name, j is the j th parameter and I is the j th input parameter.
4. $S.j.O$ S is the procedure name, j is an integer representing the j th parameter in the list and O is the output parameter.
5. $S.null$ S is the procedure name, $null$ represents no data

6. S.cons. S is the procedure name and constant a value used within S.
7. S.error S is the procedure name and error represents an invalid flow of information through procedure S.

RULES

1. L is of the form P.DS then
this form is used only to generate the relations from procedure P that updates DS with Ri.
2. L is of the form P.O then
This is used only in generating the relations from procedure P that produce an output.
3. L is of the form P.j.O then
This is used when generating the relations that produce an input of the jth parameter in the procedure's formal parameter list. There must be a unique relation for each of P's parameters.
4. L is of the form P.j.I then
This is used when generating the relations for procedure P that produce an input for the jth parameter. Another procedure T calls P to indicate that the jth parameter of P receives the input update.
5. Ri is of the form S.DS then
Procedure S reads information from DS this format is used to indicate a read only.
6. Ri is of the form S.O then
Relations are generated that come from procedure T that are return values to T from S.
7. Ri is of the form S.j.I then
For generating relations for procedure S that indicates S's jth input parameter passes information to L.
8. Ri is of the form S.cons.
Then S causes a constant number or string to flow to L.
9. Ri is of the form S.Null then
This is used to indicate when S does not update a parameter, that is, the parameter was strictly input only.
10. Ri is of the form S.error then
S calls T and one of the parameters to T is an output only thus if S attempts to input a value this would be an error.

ANALYSIS OF CALLS

The following two procedures X and Y, exhibit all possible calling structures in the light of information flow analysis. NP stands for not possible, NC for no calls and the numbers beneath are used for later reference.

The pairs 1, 3, 5, 7, 13, and 15 cannot appear in a flow of data path because for DS's the only assignment and reads allowed are from procedures or functions. The other not possibles stem from input parameters not flowing into DS's and not flowing into output parameters. Entries 2 and 4 indicate X calling Y, receiving information from Y and using this information to update a DS. The rest of the possibilities can be reasoned in like manner except entries 10 and 12, which represent calls via a third procedure. Here procedure Z calls Y and passes the returned value from Y to X. This represents a no call between X and Y but there is a data flow.

TABLE 1.

LOCAL CALL TABLE				
	X.DS	X.O	X.k.I	X.k.O
Y.DS	NP 1	NP 5	Y calls X 9	NP 13
Y.O	X calls Y 2	X calls Y 6	NC 10	X calls Y 14
Y.k.I	NP 3	NP 7	Y calls X 11	NP 15
Y.k.O	X calls Y 4	X calls Y 8	NC 12	X calls Y 16

All data flows from the highest calling structure, eventually being deposited in the data structures. Analysis of the table's data confirms this premise.

MEMORYLESS PROCEDURES

Some procedures keep no record of their data passing or the data supplied. These procedures are used to do housekeeping for memory management, for example, but their analysis for data flow would produce a false amount of data transactions. Another area that these procedures appear in are arithmetic operations that are sometimes duplicated in hardware such as double precision math etc. This discussion leads to the problem that these procedures would be difficult to discern in an automated process. That is, if memoryless procedures are not to be considered in data flow analysis some form of human decision making is required. It should be noted that this is another premise that the automation of the Henry metric is based on. The absolute numbers for the Henry metrics would

TABLE 2.

GLOBAL CALL TABLE				
	X.DS	X.O	X.k.I	X.k.O
Y.DS	NP 1	NP 5	Y flows X 9	NP 13
Y.O	Y flows X 2	Y flows X 6	Y flows X 10	Y flows X 14
Y.k.I	NP 3	NP 7	Y flows X 11	NP 15
Y.k.O	Y flows X 4	Y flows X 8	Y flows X 12	Y flows X 16

be inflated if memoryless procedures are not eliminated from the analysis. In short a memoryless procedure should be removed from the code to be analyzed if a more accurate assessment or if the absolute numbers produced are being used for a comparative study.

APPENDIX B: HENRY METRIC CODE

```
-- *****
--
-- TITLE:      AN ADA SOFTWARE METRIC
-- MODULE NAME: PACKAGE HENRY_GLOBAL
-- DATE CREATED: 09 MAY 87
-- LAST MODIFIED: 19 MAY 87
--
-- AUTHOR:     LCDR PAUL M. HERZIG
--
--
-- DESCRIPTION: This package contains the data declarations
--              and basic procedures used throughout the Henry metric.
--
-- *****

with GLOBAL, TEXT_IO;
use GLOBAL, TEXT_IO;

package HENRY_GLOBAL is

    package INTEGER_IO is new TEXT_IO.INTEGER_IO(INTEGER);
    use INTEGER_IO;

    package REAL_IO is new TEXT_IO.FLOAT_IO(FLOAT);
    use REAL_IO;

    --Real_IO produces floating point output

    MAX_ARRAY_SIZE : constant integer := 50;
    MAX_LINE_SIZE   : constant integer := 76;
    DUMMY9s         : constant integer := 9999;
    NULL_CHAR       : constant character := ' ';

    --DUMMY9s are used for false data input to the line length calculations

    type DECLARED_TYPE is (BLANK, LOCAL_DECLARE, GLOBAL_DECLARE);

    type ACTION_TYPE is (UNDEFINED,
                        HENRY_HEAD_NODE,
                        PACKAGE_TYPE,
                        PROCEDURE_TYPE,
                        FUNCTION_TYPE,
                        PARAM_TYPE,
                        ASSIGN_TYPE,
                        IDENT_TYPE,
                        DATA_STRUCTURE,
                        FUNCALL_OR_DS,
```

```

        PROCALL OR DS,
        END_PARAM_DECLARE,
        END_ACTUAL_PARAM,
        END_DECLARATIONS,
        END_ASSIGN_TYPE,
        END_PACKAGE_DECLARE,
        END_PACKAGE_TYPE,
        END_FUNCTION_TYPE,
        END_PROCEDURE_CALL);

```

```

type PARAM_CLASS is (NONE, IN_TYPE, OUT_TYPE, IN_OUT_TYPE,
        ACTUAL_PARAM);
subtype FORMAL_PARAM_CLASS is PARAM_CLASS range IN_TYPE..IN_OUT_TYPE;
subtype LEXEME_TYPE is string (1.. MAX_LINE_SIZE);
subtype END_UNITS is ACTION_TYPE range
        END_FUNCTION_TYPE..END_PROCEDURE_CALL;

```

--Declared, action and parameter classes or types are used
--in the Henry record data collection process

```

type HENRY_RECORD;
type POINTER is access HENRY_RECORD;
type HENRY_RECORD is record
    IDENTITY : DECLARED_TYPE;
    NOMEN : LEXEME_TYPE;
    TYPE_DEFINE : ACTION_TYPE;
    PARAM_TYPE : PARAM_CLASS;
    NEXT1 : POINTER;
end record;

```

--Henry record is the workhorse storage medium

```

type HENRY_LINE_COUNT_RECORD;
type LINE_POINTER is access HENRY_LINE_COUNT_RECORD;
type HENRY_LINE_COUNT_RECORD is record
    ID_NAME : LEXEME_TYPE;
    START_COUNT : INTEGER;
    STOP_COUNT : INTEGER;
    NEXT_REC : LINE_POINTER;
end record;

```

--Henry line count record is used to calculate the length of procedures
--or functions

```

type HENRY_DATA is record
    NAME_OF_DATA : LEXEME_TYPE;
    BEGIN_POINTER : POINTER;
    LINE_LENGTH_POINTER : LINE_POINTER;
end record;

```

--Henry data records are used to delineate the functions and procedures

--for easier data calculations

type HENRY_DATA_ARRAY is array (1..MAX_ARRAY_SIZE) of HENRY_DATA;

type OUTPUT_DATA is record

 TYPE_OF : ACTION_TYPE := UNDEFINED;

 NAME_OF : LEXEME_TYPE;

 TYPE_FAN_IN : FLOAT := 0.0;

 TYPE_FAN_OUT : FLOAT := 0.0;

 TYPE_COMPLEXITY : FLOAT := 0.0;

 TYPE_READ : FLOAT := 0.0;

 TYPE_WRITE : FLOAT := 0.0;

 TYPE_READ_WRITE : FLOAT := 0.0;

 TYPE_FLOW : FLOAT := 0.0;

 CODE_LENGTH : INTEGER := 0;

end record;

--Output data records hold the final calculation numbers for storage into

--an output/input file

type OUTPUT_ARRAY is array (1..MAX_ARRAY_SIZE) of OUTPUT_DATA;

NEXT_HEN, LAST_RECORD, NEW_RECORD,

HEAD_NAME_POINTER : POINTER;

HENRY_ARRAY : HENRY_DATA_ARRAY;

HENRY_LINE_COUNT : integer := 0;

OUT_PUT_DATA : OUTPUT_ARRAY;

LINE_COUNT_RECORD : HENRY_LINE_COUNT_RECORD;

HEAD_LINE, NEXT_LINE, LAST_LINE : LINE_POINTER;

PACKAGE BODY DECLARE,

 ASSIGN_MARKER,

 GLOBAL_MARKER,

 NAME_TAIL_SET,

 ASSIGN_STATEMENT,

 FUNCTION_PARAM_DECLARE,

 FORMAL_PARAM_DECLARE : BOOLEAN := FALSE;

 FIRST_HENRY_CALL : BOOLEAN := TRUE;

 DUMMY_LEXEME : LEXEME_TYPE;

procedure CREATE_NODE(NEW_NODE, LAST_RECORD : in out POINTER);

procedure CREATE_LINE_COUNT_NODE(NEXT_LINE,
 LAST_LINE : in out LINE_POINTER);

procedure INITIALIZE_HENRY(HEAD : in out POINTER;
 HEAD_LINE : in out LINE_POINTER);

procedure CLEAR_HENRY_LEXEME(HENRY_LEXEME : in out LEXEME_TYPE);

end HENRY_GLOBAL;

package body HENRY_GLOBAL is

--procedure creates Henry record nodes for data storage

procedure CREATE_NODE(NEW_NODE, LAST_RECORD : in out POINTER) is

TEMP_POINTER : POINTER;

begin

put(result_file, "in create henry node"); new_line(result_file);

TEMP_POINTER := new HENRY_RECORD;

TEMP_POINTER.IDENTITY := BLANK;

for I in 1..MAX_LINE_SIZE loop

TEMP_POINTER.NOMEN(I) := NULL_CHAR;

end loop;

TEMP_POINTER.TYPE_DEFINE := UNDEFINED;

TEMP_POINTER.PARAM_TYPE := NONE;

NEW_NODE.NEXT1 := TEMP_POINTER;

LAST_RECORD := NEW_NODE;

NEW_NODE := TEMP_POINTER;

end CREATE_NODE;

--creates line count nodes to hold the length data for each procedure or
--function

procedure CREATE_LINE_COUNT_NODE(NEXT_LINE,
LAST_LINE : in out LINE_POINTER) is

TEMP_POINTER : LINE_POINTER;

begin

put(result_file, "in henry create line node"); new_line(result_file);

TEMP_POINTER := new HENRY_LINE_COUNT_RECORD;

for I in 1..MAX_LINE_SIZE loop

TEMP_POINTER.ID_NAME(I) := NULL_CHAR;

end loop;

TEMP_POINTER.START_COUNT := DUMMY9s;

TEMP_POINTER.STOP_COUNT := DUMMY9s;

NEXT_LINE.NEXT_REC := TEMP_POINTER;

LAST_LINE := NEXT_LINE;

NEXT_LINE := TEMP_POINTER;

end CREATE_LINE_COUNT_NODE;

--sets all of the variables to their initial values besides
--creating the first Henry record and line count record

procedure INITIALIZE_HENRY(HEAD : in out POINTER;
HEAD_LINE : in out LINE_POINTER) is

```
HEAD_STRING : STRING(1..9) := "HEAD NODE";
SIZE        : INTEGER := 9;
```

```
begin
  CREATE(HENRY_FILE, out_file, HENRY_FILE_NAME);
  put(HENRY_FILE, "in INITIALIZE HENRY"); new_line(HENRY_FILE);
  CREATE(HENRY_OUT, out_file, HENRY_OUT_NAME);
  HEAD := new HENRY_RECORD;
  HEAD.NOMEN(1..SIZE) := HEAD_STRING;
  HEAD.IDENTITY := BLANK;
  HEAD.TYPE_DEFINE := HENRY_HEAD_NODE;
  HEAD.PARAM_TYPE := NONE;
  NEXT_HEN := HEAD;
  CREATE_NODE(NEXT_HEN, LAST_RECORD);
  HENRY_LINE_COUNT := 0;
  DUMMY_LEXEME(1) := NULL_CHAR;
  HEAD_LINE := new HENRY_LINE_COUNT_RECORD;
  HEAD_LINE.ID_NAME(1..SIZE) := HEAD_STRING;
  HEAD_LINE.START_COUNT := DUMMY9s;
  HEAD_LINE.STOP_COUNT := DUMMY9s;
  NEXT_LINE := HEAD_LINE;
  CREATE_LINE_COUNT_NODE(NEXT_LINE, LAST_LINE);
end INITIALIZE_HENRY;
```

```
-----
--clears the input string to null characters
```

```
procedure CLEAR_HENRY_LEXEME(HENRY_LEXEME : in out LEXEME_TYPE) is
```

```
begin
  put(HENRY_FILE, "IN CLEAR HENRY LEXEME"); NEW_LINE(HENRY_FILE);
  FOR I in 1 ..MAX_LINE_SIZE loop
    HENRY_LEXEME(I) := NULL_CHAR;
  end loop;
  END CLEAR_HENRY_LEXEME;

  END HENRY_GLOBAL;
```

```
-- *****
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME: PACKAGE HENRY_METRIC
-- DATE CREATED: 06 APR 87
-- LAST MODIFIED: 15 MAY 87
--
-- AUTHORS:    LCDR PAUL M. HERZIG
--
```

```

--
-- DESCRIPTION: This package contains the Henry metric data
--              collection and program control routines.
--
-- *****

with GLOBAL, HENRY_GLOBAL, HENRY_ANALYSIS, HENRY_DISPLAY, TEXT_IO;
use GLOBAL, HENRY_GLOBAL, HENRY_ANALYSIS, HENRY_DISPLAY, TEXT_IO;

package HENRY is

    procedure WRITE_HENRY_DATA(ID      : in DECLARED_TYPE := BLANK;
                               IN_NAME : in LEXEME_TYPE := DUMMY_LEXEME;
                               DEFINE  : in ACTION_TYPE := UNDEFINED;
                               PARAM   : in PARAM_CLASS := NONE;
                               LINK    : in POINTER);

    procedure UPDATE_LINE_COUNT;

    procedure WRITE_LINE_COUNT(IN_NAME : in LEXEME_TYPE:= DUMMY_LEXEME;
                               FIRST_COUNT : in INTEGER := DUMMY9s;
                               LAST_COUNT  : in INTEGER := DUMMY9s;
                               PTR         : in LINE_POINTER);

end HENRY;

-----

-----

package body HENRY is

-----

--produces the written data records from the parser inputs
--data is only written if it is something other than the
--null settings

    procedure WRITE_HENRY_DATA(ID      : in DECLARED_TYPE := BLANK;
                               IN_NAME : in LEXEME_TYPE:= DUMMY_LEXEME;
                               DEFINE  : in ACTION_TYPE := UNDEFINED;
                               PARAM   : in PARAM_CLASS := NONE;
                               LINK    : in POINTER) IS
    begin
        put(result_file, "in write henry data"); new_line(result_file);
        If ID /= BLANK then
            LINK.IDENTITY := ID;

```



```

    case ID is
        when LOCAL DECLARE => put(RESULT_FILE, "Local declare");
        when GLOBAL DECLARE => put(RESULT_FILE, "Global declare");
        when others => put(RESULT_FILE, "Undeclared");
    end case;
else put(RESULT_FILE, "NO DECLARATION");
end if;
new_line(RESULT_FILE);
If IN_NAME(1) /= NULL_CHAR then
    LINK.NOMEN(1..MAX_LINE_SIZE) := IN_NAME(1..MAX_LINE_SIZE);
    PUT(RESULT_FILE, IN_NAME);
ELSE PUT(RESULT_FILE, "NO NAME");
end if;
new_line(RESULT_FILE);
If DEFINE /= UNDEFINED then
    LINK.TYPE_DEFINE := DEFINE;
case DEFINE is
when UNDEFINED => put(RESULT_FILE, "Undefined");
when HENRY_HEAD_NODE => put(RESULT_FILE, "Henry Head Node");
when PACKAGE_TYPE => put(RESULT_FILE, "Package declaration");
when PROCEDURE_TYPE => put(RESULT_FILE, "Procedure declaration");
when FUNCTION_TYPE => put(RESULT_FILE, "Function declaration");
when PARAM_TYPE => put(RESULT_FILE, "Parameter declaration");
when ASSIGN_TYPE => put(RESULT_FILE, "Assignment delimiter");
when IDENT_TYPE => put(RESULT_FILE, "Identifier");
when DATA_STRUCTURE => put(RESULT_FILE, "Data structure descriptor");
when FUNCALL_OR_DS => put(RESULT_FILE, "Function or data descriptor");
when PROCALL_OR_DS => put(RESULT_FILE, "Procedure or data descriptor");
when END_PARAM_DECLARE => put(RESULT_FILE, "End parameter delimiter");
when END_ACTUAL_PARAM => put(RESULT_FILE, "End actual parameter delimiter");
when END_DECLARATIONS => put(RESULT_FILE, "End declaration delimiter");
when END_ASSIGN_TYPE => put(RESULT_FILE, "End assignment statement delimiter");
when END_PACKAGE_DECLARE => put(RESULT_FILE, "End package declaration delimiter");
when END_PACKAGE_TYPE => put(RESULT_FILE, "End package delimiter");
when END_FUNCTION_TYPE => put(RESULT_FILE, "End function delimiter");
when END_PROCEDURE_CALL => put(RESULT_FILE, "End procedure delimiter");
when others => put(RESULT_FILE, "Unknown");
end case;
new_line(RESULT_FILE);
end if;
If PARAM /= NONE then
    LINK.PARAM_TYPE := PARAM;
    CASE PARAM IS
        WHEN IN_TYPE => PUT(RESULT_FILE, "IN PARAM");
        WHEN OUT_TYPE => PUT(RESULT_FILE, "OUT PARAM");
        WHEN IN_OUT_TYPE => PUT(RESULT_FILE, "IN OUT PARAM");
        WHEN OTHERS => PUT(RESULT_FILE, "NONE");
    END CASE;
end if;
new_line(RESULT_FILE);
end WRITE_HENRY_DATA;

```

```
-----
--increments the line count for eventual inclusion into
--the calculation of a particular procedures total length
--the length number is used in the complexity calculation
```

```
procedure UPDATE_LINE_COUNT is
```

```
begin
put(result_file, "in update line count"); new_line(result_file);
if not FORMAL_PARAM_DECLARE then
  HENRY_LINE_COUNT := HENRY_LINE_COUNT + 1;
end if;
end UPDATE_LINE_COUNT;
```

```
-----
--produces the records to hold the line count information
--the records are not initially tied to a particular procedure
--but are a parallel data structure until in the Hen_anal.pkg
--where they are linked to the procedure that they hold the
--data for
```

```
procedure WRITE_LINE_COUNT(IN_NAME : in LEXEME_TYPE:= DUMMY_LEXEME;
  FIRST_COUNT : in INTEGER := DUMMY9s;
  LAST_COUNT : in INTEGER := DUMMY9s;
  PTR : in LINE_POINTER) IS
```

```
begin
  put(HENRY_FILE, "in WRITE_LINE_COUNT"); new_line(HENRY_FILE);
  put(result_file, "in write line count"); new_line(result_file);
  If IN_NAME(1) /= NULL_CHAR then
    PTR.ID_NAME(1..MAX_LINE_SIZE) := IN_NAME; end if;
  If FIRST_COUNT /= DUMMY9s then PTR.START_COUNT := FIRST_COUNT; end if;
  If LAST_COUNT /= DUMMY9s then PTR.STOP_COUNT := LAST_COUNT; end if;
```

```
end WRITE_LINE_COUNT;
```

```
end HENRY;
```

```
__*****
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME: PACKAGE HENRY_ANALYSIS
```

```
-- DATE CREATED:  29 APR 87
-- LAST MODIFIED: 29 MAY 87
--
-- AUTHOR:      LCDR PAUL M. HERZIG
--
-- DESCRIPTION:  This package contains the analysis functions
--               required to identify each data flow in the Henry metric.
--
--*****
```

```
with GLOBAL, GLOBAL_PARSER, BYPASS_SUPPORT_FUNCTIONS, HENRY_GLOBAL, TEXT
use GLOBAL, GLOBAL_PARSER, BYPASS_SUPPORT_FUNCTIONS, HENRY_GLOBAL, TEXT
```

```
package HENRY_ANALYSIS is
```

```
package NEW_INTEGER_IO is new TEXT_IO.INTEGER_IO(integer);
use NEW_INTEGER_IO;
```

```
package REAL_IO is new TEXT_IO.FLOAT_IO(float);
use REAL_IO;
```

```
PROC_FUNC_COUNT : INTEGER := 0;
INDEX           : INTEGER;
NAME_POINTER    : POINTER;
```

```
--PROC_FUNC_COUNT is the total number of procedures and functions in the
--analyzed package
```

```
type SELECTOR_TYPE is (PROCEDURE_FIND, FUNCTION_FIND,
                       VARIABLE_FIND);
```

```
procedure CLEAN_UP_HENRY_DATA(HEAD : in POINTER);
procedure SET_UP_HENRY_ARRAY(HEAD : in POINTER;
                             HEAD_LINE : in LINE_POINTER);
```

```
procedure SPRUCE_UP_HENRY_DATA;
function LOCAL_NAME(NAME_POINTER : in POINTER;
                   SELECTOR      : in SELECTOR_TYPE;
                   INDEX         : in INTEGER )
    return BOOLEAN;
```

```
function CALCULATE_LINE_COUNT(WORK_LINE : LINE_POINTER)
    return INTEGER;
```

```
function FIND_STRING_SIZE(IN_STRING : LEXEME_TYPE) RETURN INTEGER;
function TRANSITIVITY_IN(IN_NAME : LEXEME_TYPE;
                        BEGIN_LOOP, STOP_LOOP : POINTER)
    RETURN FLOAT;
```

```
function TRANSITIVITY_OUT(IN_NAME : LEXEME_TYPE;
                        TOP       : POINTER)
    RETURN FLOAT;
```

```
procedure CALCULATE_METRIC(HEAD : in POINTER;
                          HEAD_LINE : in LINE_POINTER);
```

```

end HENRY_ANALYSIS;
-----

-----
package body HENRY_ANALYSIS is

-----
--starts the process of setting up the raw Henry records into
--decipherable data, it also counts the numbers of procedures
--functions and fills in empty parameter type fields in the
--Henry records

procedure CLEAN_UP_HENRY_DATA(HEAD : IN POINTER) is

TEMP, TOP, BOTTOM : POINTER;

begin
  put(HENRY_FILE, "in CLEAN_UP_HENRY"); new_line(HENRY_FILE);
  CLEARSCREEN;
  put("Processing Henry data records ... please wait");
  TOP := HEAD;
  BOTTOM := TOP.NEXT1;

-- move past package declarations

  LOOP
    EXIT WHEN TOP.TYPE_DEFINE = END_PACKAGE_DECLARE;
    TOP := BOTTOM;
    BOTTOM := TOP.NEXT1;
  END LOOP;

--count the number of procedures/functions

  LOOP
    EXIT WHEN BOTTOM.TYPE_DEFINE = END_PACKAGE_TYPE;
    if (BOTTOM.TYPE_DEFINE = PROCEDURE_TYPE) or
      (BOTTOM.TYPE_DEFINE = FUNCTION_TYPE) then
      PROC_FUNC_COUNT := PROC_FUNC_COUNT + 1;
    end if;

    TEMP := BOTTOM;
    BOTTOM := TEMP.NEXT1;
  end loop;
  BOTTOM := TOP;

--ensure all parameter records have a type defined

  FOR I in 1..PROC_FUNC_COUNT LOOP
    LOOP
      EXIT WHEN (TOP.TYPE_DEFINE = PROCEDURE_TYPE) OR
        (TOP.TYPE_DEFINE = FUNCTION_TYPE);
      TOP := BOTTOM.NEXT1;
    
```

```

    BOTTOM := TOP;
END LOOP;
TEMP := TOP.NEXT1;
if TEMP.TYPE_DEFINE = PARAM_TYPE AND
TOP.TYPE_DEFINE /= FUNCTION_TYPE then
    LOOP
        EXIT WHEN TEMP.TYPE_DEFINE = END_PARAM_DECLARE;
        if TEMP.PARAM_TYPE NOT IN FORMAL_PARAM_CLASS THEN
            LOOP
                EXIT WHEN (TEMP.PARAM_TYPE = IN_TYPE) OR
                    (TEMP.PARAM_TYPE = OUT_TYPE) OR
                    (TEMP.PARAM_TYPE = IN_OUT_TYPE);
                BOTTOM := TEMP;
                TEMP := BOTTOM.NEXT1;
            END LOOP;
            BOTTOM := TEMP;
            TEMP := TOP.NEXT1;
            TOP := TEMP;
            LOOP
                EXIT WHEN (TOP.PARAM_TYPE = IN_TYPE) OR
                    (TOP.PARAM_TYPE = OUT_TYPE) OR
                    (TOP.PARAM_TYPE = IN_OUT_TYPE);
                TEMP.PARAM_TYPE := BOTTOM.PARAM_TYPE;
                TEMP := TOP.NEXT1;
                TOP := TEMP;
            END LOOP;
        else
            TOP := TEMP;
            BOTTOM := TEMP;
        end if;
        TEMP := TOP.NEXT1;
    END LOOP;

--functions usually invoke the default in_type parameter
--insert this type if it is not defined

elseif TOP.TYPE_DEFINE = FUNCTION_TYPE THEN
    if TEMP.TYPE_DEFINE = PARAM_TYPE THEN
        LOOP
            EXIT WHEN TEMP.TYPE_DEFINE = END_PARAM_DECLARE;
            TEMP.PARAM_TYPE := IN_TYPE;
            TEMP := BOTTOM.NEXT1;
            BOTTOM := TEMP;
        END LOOP;
    end if;
end if;
TOP := BOTTOM.NEXT1;
BOTTOM := TOP;
END LOOP; --FOR LOOP
end CLEAN_UP_HENRY_DATA;
-----

```

```
--sets up the Henry data records to mark the beginning of each
--function or procedure, it also ties the procedure line length
--records to its proper procedure/function
```

```
procedure SET_UP_HENRY_ARRAY(HEAD      : in POINTER;
                             HEAD_LINE : in LINE_POINTER) is
```

```
WORK_LINE, TEMP_LINE : LINE_POINTER;
TEMP, TOP, BOTTOM    : POINTER;
```

```
begin
```

```
  put(HENRY_FILE, "in SET_UP_HENRY"); new_line(HENRY_FILE);
  WORK_LINE := HEAD_LINE.NEXT_REC;
  TEMP_LINE := WORK_LINE;
  BOTTOM := HEAD;
  TOP := BOTTOM;
```

```
--GO PAST DECLARATIONS
```

```
  LOOP
```

```
    EXIT WHEN TOP.TYPE_DEFINE = END_PACKAGE_DECLARE;
    TOP := BOTTOM.NEXT1;
    BOTTOM := TOP;
  END LOOP;
```

```
--set up the Henry array records so that their pointers are at the
--top of each procedure or function
```

```
  FOR I in 1..PROC_FUNC_COUNT LOOP
```

```
    LOOP
```

```
      EXIT WHEN (TOP.TYPE_DEFINE = PROCEDURE_TYPE) OR
        (TOP.TYPE_DEFINE = FUNCTION_TYPE);
      TOP := BOTTOM.NEXT1;
      BOTTOM := TOP;
```

```
    END LOOP;
```

```
    HENRY_ARRAY(I).NAME_OF_DATA(1..MAX_LINE_SIZE) :=
      TOP.NOMEN(1..MAX_LINE_SIZE);
```

```
    HENRY_ARRAY(I).BEGIN_POINTER := TOP;
```

```
    LOOP
```

```
      EXIT WHEN (BOTTOM.TYPE_DEFINE = END_FUNCTION_TYPE) OR
        (BOTTOM.TYPE_DEFINE = END_PROCEDURE_CALL);
      TEMP := BOTTOM.NEXT1;
      BOTTOM := TEMP;
```

```
    END LOOP;
```

```
--set the line count records to their related procedure/function
```

```
    TOP := BOTTOM.NEXT1;
```

```
    BOTTOM := TOP;
```

```
    HENRY_ARRAY(I).LINE_LENGTH_POINTER := WORK_LINE;
```

```
    WORK_LINE := TEMP_LINE.NEXT_REC;
```

```
    TEMP_LINE := WORK_LINE;
```



```

    END LOOP; --FOR LOOP
end SET_UP_HENRY_ARRAY;
-----
--this procedure calculates the length of each procedure/function
--the results are fed into line_length records

function CALCULATE_LINE_COUNT(WORK_LINE : LINE_POINTER)

    return INTEGER is

    DIFFERENCE : INTEGER := 0;
    I          : INTEGER;

begin
    put(HENRY_FILE, "in CALCULATE_LINE_COUNT"); new_line(HENRY_FILE);
    DIFFERENCE := WORK_LINE.STOP_COUNT - WORK_LINE.START_COUNT;
    RETURN (DIFFERENCE);
end CALCULATE_LINE_COUNT;
-----
--this function searches for local, within a procedure, and global-local,
--within a package, for variable name matches
--it is selectable for which name the search is conducted

function LOCAL_NAME(NAME_POINTER : in POINTER;
                    SELECTOR      : in SELECTOR_TYPE;
                    INDEX         : in INTEGER )
    return BOOLEAN is

    NAME_SOUGHT, POINTER_NAME : LEXEME_TYPE;
    NAME_SIZE, POINTER_SIZE : INTEGER := MAX_LINE_SIZE;
    RESULT                  : BOOLEAN := FALSE;
    TEMP, TEMP1             : POINTER;
    I                       : INTEGER := 1;

begin

    put(HENRY_FILE, "in LOCAL_NAME"); new_line(HENRY_FILE);
    NAME_SOUGHT(1..NAME_SIZE) := NAME_POINTER.NOMEN(1..NAME_SIZE);
    CONVERT_UPPER_CASE(NAME_SOUGHT, NAME_SIZE);

    if ((SELECTOR = PROCEDURE_FIND) OR (SELECTOR = FUNCTION_FIND))
    AND (PROC_FUNC_COUNT /= 0) then
        LOOP
            POINTER_NAME(1..POINTER_SIZE) :=
                HENRY_ARRAY(I).NAME_OF_DATA(1..POINTER_SIZE);
            CONVERT_UPPER_CASE(POINTER_NAME, POINTER_SIZE);
            RESULT := (NAME_SOUGHT(1..NAME_SIZE) =
                POINTER_NAME(1..POINTER_SIZE));
            EXIT WHEN (I = PROC_FUNC_COUNT) OR (RESULT);
            I := I + 1;
        END LOOP;

```

```

I := 1;

--if it is a variable name search first within the package
--declarations, next within the procedure declarations

elsif SELECTOR = VARIABLE_FIND then
  TEMP := HEAD.NEXT1;
  LOOP
    EXIT WHEN (TEMP.TYPE_DEFINE = END_PACKAGE_DECLARE) OR
      (RESULT);
    if TEMP.TYPE_DEFINE = IDENT_TYPE then
      POINTER_NAME(1..POINTER_SIZE) := TEMP.NOMEN(1..POINTER_SIZE);
      CONVERT_UPPER_CASE(POINTER_NAME, POINTER_SIZE);
      RESULT := (NAME_SOUGHT(1..NAME_SIZE) =
        POINTER_NAME(1..POINTER_SIZE));
    end if;
    TEMP1 := TEMP.NEXT1;
    TEMP := TEMP1;
  END LOOP;

--did not find the variable within the package declarations
--search the specified procedures declarations

if NOT RESULT then
  TEMP := HENRY_ARRAY(INDEX).BEGIN_POINTER;
  LOOP -- DID NOT FIND NAME IN PACKAGE DECLARATIONS
    EXIT WHEN (TEMP.TYPE_DEFINE = END_DECLARATIONS) OR
      (RESULT);
    if TEMP.TYPE_DEFINE = IDENT_TYPE then
      POINTER_NAME(1..POINTER_SIZE) :=
        TEMP.NOMEN(1..POINTER_SIZE);
      CONVERT_UPPER_CASE(POINTER_NAME, POINTER_SIZE);
      RESULT := (NAME_SOUGHT(1..NAME_SIZE) =
        POINTER_NAME(1..POINTER_SIZE));
    end if;
    TEMP1 := TEMP.NEXT1;
    TEMP := TEMP1;
  END LOOP;
end if;
end if;
RETURN (RESULT);
end LOCAL_NAME;

-----

--finishes polishing the Henry records, the data can now be analyzed
--for local/global data and starts the actual number crunching

procedure SPRUCE_UP_HENRY_DATA is

```

```

TEMP, TEMP1, TEMP2 : POINTER;

begin
  put(HENRY_FILE, "in SPRUCE UP HENRY"); new_line(HENRY_FILE);
  FOR I in 1..PROC_FUNC_COUNT LOOP
    TEMP1 := HENRY_ARRAY(I).BEGIN_POINTER;

--loop past parameters

    LOOP
      EXIT WHEN TEMP1.TYPE_DEFINE = END_DECLARATIONS;
      TEMP2 := TEMP1.NEXT1;
      TEMP1 := TEMP2;
    END LOOP;
    TEMP := TEMP1.NEXT1;

--first analyze identifier types (variables) for local or global
--significance. Update the record if it is not local

    LOOP --LOOK FOR IDENT TYPES
      EXIT WHEN (TEMP.TYPE_DEFINE = END_FUNCTION_TYPE) OR
        (TEMP.TYPE_DEFINE = END_PROCEDURE_CALL);
      if TEMP.TYPE_DEFINE = IDENT_TYPE then
        if TEMP.IDENTITY = BLANK then
          if LOCAL_NAME(TEMP, VARIABLE_FIND, I) then
            TEMP.IDENTITY := LOCAL_DECLARE;
          else TEMP.IDENTITY := GLOBAL_DECLARE;
          end if;
        end if;
      end if;
      TEMP1 := TEMP.NEXT1;
      TEMP := TEMP1;

    END LOOP;

--now go through the Henry records looking for unresolved
--procedure or function calls update the Henry records
--to reflect procedure types or function types or data structures

    TEMP1 := HENRY_ARRAY(I).BEGIN_POINTER;
    TEMP := TEMP1.NEXT1;

--get past declarations

    LOOP
      EXIT WHEN TEMP.TYPE_DEFINE = END_DECLARATIONS;
      TEMP1 := TEMP.NEXT1;
      TEMP := TEMP1;
    END LOOP;

```

--looking for procedure or function calls

LOOP

EXIT WHEN (TEMP.TYPE_DEFINE = END_FUNCTION_TYPE) OR
(TEMP.TYPE_DEFINE = END_PROCEDURE_CALL);

if TEMP.TYPE_DEFINE = PROCALL_OR_DS then

TEMP1 := TEMP;

LOOP -- MOVE PAST THE PARAMETERS

EXIT WHEN TEMP1.TYPE_DEFINE = END_ACTUAL_PARAM;

TEMP2 := TEMP1;

TEMP1 := TEMP2.NEXT1;

END LOOP;

if (LOCAL_NAME(TEMP, PROCEDURE_FIND, I)) then

TEMP.TYPE_DEFINE := PROCEDURE_TYPE;

else

TEMP2 := TEMP1.NEXT1;

if TEMP2.TYPE_DEFINE = ASSIGN_TYPE then

TEMP.TYPE_DEFINE := DATA_STRUCTURE;

--IF NOT IT IS A PROCEDURE CALL ONLY

TEMP1 := TEMP2.NEXT1;

LOOP

EXIT WHEN TEMP1.TYPE_DEFINE = END_ASSIGN_TYPE;

if (TEMP1.TYPE_DEFINE = FUNCALL_OR_DS) then

if NOT LOCAL_NAME(TEMP1, FUNCTION_FIND, I)

then

TEMP1.TYPE_DEFINE := DATA_STRUCTURE;

else TEMP1.TYPE_DEFINE := FUNCTION_TYPE;

end if;

end if;

TEMP2 := TEMP1;

TEMP1 := TEMP2.NEXT1;

END LOOP;

else TEMP.TYPE_DEFINE := PROCEDURE_TYPE;

end if;

end if;

--only function calls that cannot be resolved into a local name are

--specified as data structures

elsif TEMP.TYPE_DEFINE = FUNCALL_OR_DS then

TEMP1 := TEMP;

LOOP --LOOKING FOR FUNCTIONS

EXIT WHEN TEMP.TYPE_DEFINE = END_ASSIGN_TYPE;

if TEMP.TYPE_DEFINE = FUNCALL_OR_DS then

if (LOCAL_NAME(TEMP, FUNCTION_FIND, I))

then

TEMP.TYPE_DEFINE := FUNCTION_TYPE;

else TEMP.TYPE_DEFINE := DATA_STRUCTURE;

end if;

end if;

TEMP1 := TEMP.NEXT1;

```

        TEMP := TEMP1;
    END LOOP;
end if;
TEMP1 := TEMP;
TEMP := TEMP1.NEXT1;
END LOOP; --PROCALL_OR_DS LOOP
END LOOP; -- FOR LOOP

```

```

end SPRUCE_UP_HENRY_DATA;

```

```

-----
--this function only works for Ada language strings that identify
--a variable

```

```

function FIND_STRING_SIZE(IN_STRING : LEXEME_TYPE) RETURN INTEGER
is

```

```

    SIZE : INTEGER := 0;

```

```

BEGIN

```

```

    PUT(HENRY_FILE, "IN FIND STRING SIZE"); NEW_LINE(HENRY_FILE);
    FOR I IN 1..MAX_LINE_SIZE LOOP
        IF IN_STRING(I) /= NULL_CHAR THEN
            SIZE := SIZE + 1;
        END IF;
    END LOOP;
    RETURN SIZE;
END FIND_STRING_SIZE;

```

```

-----
--transitivity is detected by searching the right hand side of
--assignment statements for a name match of the actual
--parameters from a function or procedure call

```

```

function TRANSITIVITY_IN(IN_NAME : LEXEME_TYPE;
    BEGIN_LOOP, STOP_LOOP : POINTER)
    RETURN FLOAT is

```

```

    ASSIGN_MARK,
    PROCEDURE_MARK : BOOLEAN := FALSE;
    TRANS_COUNT : FLOAT := 0.0;
    TEMP, TEMP1 : POINTER := BEGIN_LOOP;
    T1, T2 : POINTER;
    MAX : INTEGER := MAX_LINE_SIZE;

```

```

BEGIN

```

```

--stop loop is determined by where in the parameter list you are

```

```

    LOOP
        EXIT WHEN TEMP = STOP_LOOP;
        if TEMP.TYPE_DEFINE = ASSIGN_TYPE THEN

```

```

    ASSIGN_MARK := TRUE;
elseif TEMP.TYPE_DEFINE = END_ASSIGN_TYPE THEN
    ASSIGN_MARK := FALSE;
end if;

```

--mark whether you've passed an assignment

```

if (TEMP.NOMEN(1..MAX) = IN_NAME(1..MAX)) AND
    (NOT ASSIGN_MARK) THEN
    TRANS_COUNT := TRANS_COUNT + 1.0;

```

--if you have detected a name match count the number of assignment

--variables as transitive feed into the actual parameter

--note functions have already been calculated the same for

--data structures so skip these counts

```

    T1 := TEMP; T2 := T1.NEXT1;
    if (T1.TYPE_DEFINE = IDENT_TYPE) AND
        (T2.TYPE_DEFINE = ASSIGN_TYPE) then
        LOOP
            EXIT WHEN T2.TYPE_DEFINE = END_ASSIGN_TYPE;
            if T2.TYPE_DEFINE = IDENT_TYPE THEN
                TRANS_COUNT := TRANS_COUNT + 1.0;
            end if;
            T1 := T2;
            T2 := T1.NEXT1;
        END LOOP;
    end if;
end if;
TEMP := TEMP1.NEXT1;
TEMP1 := TEMP;
END LOOP;
RETURN(TRANS_COUNT);
END TRANSITIVITY_IN;

```

--if detect a name match on the right hand side of an assignment

--statement have a transitive relation on this variable but

--there is no need to count the rest of the assignment

--variables because the most it can account for is 1

```

function TRANSITIVITY_OUT(IN_NAME : LEXEME_TYPE;
    TOP : POINTER)
    RETURN FLOAT is

```

```

    ASSIGN_MARK : BOOLEAN := FALSE;
    TRANS_COUNT : FLOAT := 0.0;
    TEMP, TEMP1 : POINTER := TOP;
    MAX : INTEGER := MAX_LINE_SIZE;

```



```

BEGIN
  LOOP
    EXIT WHEN (TEMP.TYPE_DEFINE = END_PROCEDURE_CALL) OR
      (TEMP.TYPE_DEFINE = END_FUNCTION_TYPE);
    IF TEMP.TYPE_DEFINE = ASSIGN_TYPE THEN
      ASSIGN_MARK := TRUE;
    ELSIF TEMP.TYPE_DEFINE = END_ASSIGN_TYPE THEN
      ASSIGN_MARK := FALSE;
    END IF;
    IF (TEMP.NOMEN(1..MAX) = IN_NAME(1..MAX)) AND (ASSIGN_MARK)
      THEN
        TRANS_COUNT := TRANS_COUNT + 1.0;
      END IF;
      TEMP := TEMP1.NEXT1;
      TEMP1 := TEMP;
    END LOOP;
    RETURN(TRANS_COUNT);
  END TRANSITIVITY_OUT;

```

--finishes polishing the data and with the transitivity functions calculates
 --the fan in /fan out of data besides the global data structures

```

procedure CALCULATE_METRIC (HEAD      : in POINTER;
                             HEAD_LINE : in LINE_POINTER) is

```

```

  TEMP_LINE      : LINE_POINTER;
  TEMP, TOP, TEMP1, TEMP2 : POINTER;
  PROC_PTR,
  PARAM_PTR      : POINTER;

  FAN_IN, FAN_OUT      : FLOAT;
  LENGTH              : INTEGER := 0;
  MAX                 : INTEGER := MAX_LINE_SIZE;
  CODE_EXPONENT       : INTEGER := 2;
  COMPLEXITY,
  GLOBAL_FLOW,
  GLOBAL_READ,
  GLOBAL_WRITE,
  GLOBAL_READ_WRITE   : FLOAT;

```

--global flow represents the whole picture of global data flow
 --the equation is below and encompasses both read and write to
 --global data structures
 --note: global data structures could be external function calls
 --there is no means to determine the difference

```

  NEW_NAME      : STRING(1..MAX_LINE_SIZE);
  NAME_OF       : LEXEME_TYPE;
  ASSIGN_MARK,
  GLOBAL_MARK   : BOOLEAN := FALSE;

```

```

SIZE          : INTEGER := MAX_LINE_SIZE;
NEW_SIZE      : INTEGER := 0;
TEMP_NAME     : STRING(1..SIZE);

begin
  PUT(HENRY_FILE, "IN CALCUALTE METRIC"); NEW_LINE(HENRY_FILE);

```

--first Henry call boolean is so that the data can be reshow n

```

IF FIRST_HENRY_CALL then
  CLEAN_UP_HENRY_DATA(HEAD);
  SET_UP_HENRY_ARRAY(HEAD, HEAD_LINE);
  SPRUCE_UP_HENRY_DATA;
  FOR I in 1..PROC_FUNC_COUNT LOOP
    GLOBAL_READ      := 0.0;
    GLOBAL_WRITE     := 0.0;
    GLOBAL_READ_WRITE := 0.0;
    FAN_IN           := 0.0;
    FAN_OUT          := 0.0;
    COMPLEXITY       := 0.0;
    GLOBAL_FLOW      := 0.0;
    LENGTH           := 0;
    TEMP := HENRY_ARRAY(I).BEGIN_POINTER;
    CLEAR_HENRY_LEXEME(TEMP_NAME);
    TEMP_NAME(1..MAX_LINE_SIZE) := HENRY_ARRAY(I).NAME_OF_DATA;
    SIZE := FIND_STRING_SIZE(TEMP_NAME);
    CLEAR_HENRY_LEXEME(NEW_NAME);
    CONVERT_UPPER_CASE(TEMP_NAME, SIZE);

```

--initialize the variables for each loop on either function or procedure

--calculations

```

if TEMP.TYPE_DEFINE = PROCEDURE_TYPE then
  OUT_PUT_DATA(I).TYPE_OF := PROCEDURE_TYPE;
  NEW_SIZE := SIZE + 10;
  NEW_NAME(1..10) := "procedure ";
  NEW_NAME(11..NEW_SIZE) := TEMP_NAME(1..SIZE);
  OUT_PUT_DATA(I).NAME_OF(1..NEW_SIZE) := NEW_NAME(1..NEW_SIZE);
  PUT(HENRY_OUT, "-----");
  NEW_LINE(HENRY_OUT, 2);
  PUT(HENRY_OUT, NEW_NAME);
  NEW_LINE(HENRY_OUT);
elsif TEMP.TYPE_DEFINE = FUNCTION_TYPE then
  OUT_PUT_DATA(I).TYPE_OF := FUNCTION_TYPE;
  NEW_SIZE := SIZE + 9;
  NEW_NAME(1..9) := "function ";
  NEW_NAME(10..NEW_SIZE) := TEMP_NAME(1..SIZE);
  OUT_PUT_DATA(I).NAME_OF(1..NEW_SIZE) := NEW_NAME(1..NEW_SIZE);
  PUT(HENRY_OUT, "-----");
  NEW_LINE(HENRY_OUT, 2);
  PUT(HENRY_OUT, NEW_NAME);

```

```

    NEW_LINE(HENRY_OUT);
end if;

--constructs a pretty name for the data file

TEMP1 := TEMP.NEXT1;
TEMP2 := TEMP1;

-- look for global variables; increase global flow metric

LOOP
    EXIT WHEN (TEMP1.TYPE_DEFINE = END_FUNCTION_TYPE) OR
        (TEMP1.TYPE_DEFINE = END_PROCEDURE_CALL);
    if TEMP1.TYPE_DEFINE = ASSIGN_TYPE then
        ASSIGN_MARKER := TRUE;
    elsif TEMP1.TYPE_DEFINE = END_ASSIGN_TYPE then
        ASSIGN_MARKER := FALSE;
        GLOBAL_MARKER := FALSE;
    end if;
    if (TEMP1.IDENTITY = GLOBAL_DECLARE) AND (ASSIGN_MARKER)
        then
        GLOBAL_READ := GLOBAL_READ + 1.0;
        if GLOBAL_MARKER then
            GLOBAL_READ_WRITE := GLOBAL_READ_WRITE + 1.0;
        end if;
    elsif (TEMP1.IDENTITY = GLOBAL_DECLARE) AND
        (NOT ASSIGN_MARKER) then
        GLOBAL_WRITE := GLOBAL_WRITE + 1.0;
        GLOBAL_MARKER := TRUE;
    end if;
    TEMP1 := TEMP2.NEXT1;
    TEMP2 := TEMP1;
END LOOP;

-- calculate next level of data flow; procedure formal parameters

TEMP1 := TEMP.NEXT1;
if TEMP1.TYPE_DEFINE = PARAM_TYPE then
    LOOP
        EXIT WHEN TEMP1.TYPE_DEFINE = END_PARAM_DECLARE;
        if TEMP1.PARAM_TYPE = IN_TYPE THEN
            FAN_IN := FAN_IN + 1.0;
        elsif TEMP1.PARAM_TYPE = OUT_TYPE THEN
            FAN_OUT := FAN_OUT + 1.0;
        elsif TEMP1.PARAM_TYPE = IN_OUT_TYPE THEN
            FAN_IN := FAN_IN + 1.0;
            FAN_OUT := FAN_OUT + 1.0;
        end if;
        TEMP := TEMP1;
        TEMP1 := TEMP.NEXT1;
    END LOOP;
end if;

```

--look for procedure and function type actual parameters

```
TEMP := TEMP1;
TEMP1 := TEMP.NEXT1;
TEMP := TEMP1;
LOOP
  EXIT WHEN (TEMP.TYPE_DEFINE = END_FUNCTION_TYPE) OR
    (TEMP.TYPE_DEFINE = END_PROCEDURE_CALL);
```

```
TEMP1 := TEMP;
TEMP := TEMP1.NEXT1;
if TEMP.TYPE_DEFINE = ASSIGN_TYPE then
  ASSIGN_MARKER := TRUE;
elsif TEMP.TYPE_DEFINE = END_ASSIGN_TYPE then
  ASSIGN_MARKER := FALSE;
  GLOBAL_MARKER := FALSE;
end if;
if TEMP.TYPE_DEFINE = PROCEDURE_TYPE then
  TEMP1 := TEMP.NEXT1;
  LOOP
    EXIT WHEN TEMP1.TYPE_DEFINE = END_ACTUAL_PARAM;
    FAN_OUT := FAN_OUT + 1.0;
    TEMP2 := TEMP1;
    TEMP1 := TEMP2.NEXT1;
  END LOOP;
elsif TEMP.TYPE_DEFINE = FUNCTION_TYPE THEN
```

-- count the function parameters

```
TEMP1 := TEMP.NEXT1;
LOOP
  EXIT WHEN TEMP1.TYPE_DEFINE = END_ACTUAL_PARAM;
  FAN_OUT := FAN_OUT + 1.0;
  TEMP2 := TEMP1;
  TEMP1 := TEMP2.NEXT1;
END LOOP;
FAN_IN := FAN_IN + 1.0; --RETURN FROM FUNCTION
elsif (TEMP.TYPE_DEFINE = DATA_STRUCTURE) and
  (NOT ASSIGN_MARK) THEN
  GLOBAL_MARK := TRUE;
  GLOBAL_WRITE := GLOBAL_WRITE + 1.0;
elsif (TEMP.TYPE_DEFINE = DATA_STRUCTURE) and ASSIGN_MARK
  THEN
  if GLOBAL_MARK THEN
    GLOBAL_READ_WRITE := GLOBAL_READ_WRITE + 1.0;
  elsif NOT GLOBAL_MARK THEN
    GLOBAL_READ := GLOBAL_READ + 1.0;
  end if;
end if;
END LOOP;
```

--now check for transitivity in the actual parameters

```
TOP := HEAD.NEXT1;
TEMP := TOP;
LOOP
  EXIT WHEN TOP.TYPE_DEFINE = END_PACKAGE_DECLARE;
  TOP := TEMP.NEXT1;
  TEMP := TOP;
END LOOP;
FOR I IN 1..PROC_FUNC_COUNT LOOP
  TEMP := HENRY_ARRAY(I).BEGIN_POINTER;
  PROC_PTR := TEMP.NEXT1;
  TEMP := PROC_PTR;
LOOP
  LOOP
    EXIT WHEN (PROC_PTR.TYPE_DEFINE = PROCEDURE_TYPE) OR
      (PROC_PTR.TYPE_DEFINE = FUNCTION_TYPE) OR
      (PROC_PTR.TYPE_DEFINE = END_PROCEDURE_CALL) OR
      (PROC_PTR.TYPE_DEFINE = END_FUNCTION_TYPE);
    PROC_PTR := TEMP.NEXT1;
    TEMP := PROC_PTR;
  END LOOP;
  IF (PROC_PTR.TYPE_DEFINE /= END_PROCEDURE_CALL) AND
    (PROC_PTR.TYPE_DEFINE /= END_FUNCTION_TYPE) THEN
    PARAM_PTR := PROC_PTR.NEXT1;
    LOOP
      EXIT WHEN PARAM_PTR.TYPE_DEFINE = END_ACTUAL_PARAM;
      NAME_OF(1..MAX) := PARAM_PTR.NOMEN(1..MAX);
      FAN_IN := FAN_IN + TRANSITIVITY_IN(NAME_OF,
        TOP, PROC_PTR);
      FAN_OUT := FAN_OUT + TRANSITIVITY_OUT(NAME_OF,
        PARAM_PTR);
      TEMP := PARAM_PTR;
      PARAM_PTR := TEMP.NEXT1;
    END LOOP;
  END IF;
  EXIT WHEN (PROC_PTR.TYPE_DEFINE = END_PROCEDURE_CALL) OR
    (PROC_PTR.TYPE_DEFINE = END_FUNCTION_TYPE) OR
    (PROC_PTR.TYPE_DEFINE = END_PACKAGE_TYPE);
  PROC_PTR := PARAM_PTR.NEXT1;
  TEMP := PROC_PTR;
END LOOP;
END LOOP; --FOR LOOP
```

--NOW CALCULATE ALL THE NUMBERS AND STORE IN OUTPUT FILE

```
LENGTH :=
  CALCULATE_LINE_COUNT(HENRY_ARRAY(I).LINE_LENGTH_POINTER);
COMPLEXITY := float(LENGTH) *
  (FAN_IN * FAN_OUT) ** CODE_EXPONENT;
```

```

GLOBAL_FLOW := GLOBAL_WRITE *
              (GLOBAL_READ + GLOBAL_READ_WRITE) +
              GLOBAL_READ_WRITE *
              (GLOBAL_READ + GLOBAL_READ_WRITE - 1.0);
put(HENRY_OUT, "NUMBER OF LINES = ");
put(HENRY_OUT, LENGTH);
OUT_PUT_DATA(I).CODE_LENGTH := LENGTH;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "FAN IN = ");
put(HENRY_OUT, FAN_IN);
OUT_PUT_DATA(I).TYPE_FAN_IN := FAN_IN;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "FAN OUT = ");
put(HENRY_OUT, FAN_OUT);
OUT_PUT_DATA(I).TYPE_FAN_OUT := FAN_OUT;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "COMPLEXITY = ");
put(HENRY_OUT, COMPLEXITY);
OUT_PUT_DATA(I).TYPE_COMPLEXITY := COMPLEXITY;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "GLOBAL READ = ");
put(HENRY_OUT, GLOBAL_READ);
OUT_PUT_DATA(I).TYPE_READ := GLOBAL_READ;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "GLOBAL WRITE = ");
put(HENRY_OUT, GLOBAL_WRITE);
OUT_PUT_DATA(I).TYPE_WRITE := GLOBAL_WRITE;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "GLOBAL READ WRITE = ");
put(HENRY_OUT, GLOBAL_READ_WRITE);
OUT_PUT_DATA(I).TYPE_READ_WRITE := GLOBAL_READ_WRITE;
NEW_LINE(HENRY_OUT);
put(HENRY_OUT, "GLOBAL FLOW = ");
put(HENRY_OUT, GLOBAL_FLOW);
OUT_PUT_DATA(I).TYPE_FLOW := GLOBAL_FLOW;
NEW_LINE(HENRY_OUT, 2);

END LOOP;
PUT(HENRY_OUT, "-----");
end if; --FIRST_HENRY_CALL;
FIRST_HENRY_CALL := FALSE;
END CALCULATE_METRIC;
END HENRY_ANALYSIS;

```

```

-- *****
--
-- TITLE:      AN ADA SOFTWARE METRIC
--

```



```

-- MODULE NAME:  PACKAGE HENRY_DISPLAY
-- DATE CREATED: 04 MAY 87
-- LAST MODIFIED: 31 MAY 87
--
-- AUTHOR:      LCDR PAUL M. HERZIG
--
-- DESCRIPTION:  This package contains the display functions.
--
-- *****

with GLOBAL, GLOBAL_PARSER, HENRY_GLOBAL, HENRY_ANALYSIS, TERM_IO,
    TEXT_IO;
use GLOBAL, GLOBAL_PARSER, HENRY_GLOBAL, HENRY_ANALYSIS, TERM_IO,
    TEXT_IO;

package HENRY_DISPLAY is

    package NEW_INTEGER_IO is new TEXT_IO.INTEGER_IO(integer);
    use NEW_INTEGER_IO;

    package REAL_IO is new TEXT_IO.FLOAT_IO(float);
    use REAL_IO;

    type RELATIVE_ARRAY is array (1..MAX_ARRAY_SIZE) of OUTPUT_DATA;
    subtype ROW_STRING_TYPE is STRING(1..30);

    --relative array is the temporary storage for the calcuations
    --that compare like numbers such as fan_in of
    --procedure 1 to fan_in of procedure 2

    MAX_FAN_IN      : INTEGER := 1;
    MAX_FAN_OUT     : INTEGER := 1;
    MAX_COMPLEXITY  : INTEGER := 1;
    MAX_READ        : INTEGER := 1;
    MAX_WRITE       : INTEGER := 1;
    MAX_READ_WRITE  : INTEGER := 1;
    MAX_FLOW        : INTEGER := 1;
    REL_FAN_IN      : FLOAT;
    REL_FAN_OUT     : FLOAT;
    REL_COMPLEXITY  : FLOAT;
    REL_READ        : FLOAT;
    REL_WRITE       : FLOAT;
    REL_READ_WRITE  : FLOAT;
    REL_FLOW        : FLOAT;
    REL_ARRAY       : RELATIVE_ARRAY;
    STRING_SIZE     : INTEGER;

    procedure VIEW_HENRY(SELECTOR : in integer);
    procedure LIST_HENRY_DATA;
    procedure LIST_METRIC_DATA;
    procedure WRITE_RELATIVE_DATA;

```

```

procedure GRAPH_RELATIVE_DATA;
procedure PAUSE_PRINT(STOP_COUNT : in INTEGER;
                      RUNNING_COUNT : in out INTEGER;
                      DONE : in out BOOLEAN);
procedure SET_UP_SCREEN(IN_STRING : in ROW_STRING_TYPE;
                       STRING_SIZE : in INTEGER);

procedure CENTER_STRING(NAME : in ROW_STRING_TYPE;
                       IN_ROW, WIDTH : in integer);
end HENRY_DISPLAY;

```

```

-----
-----

```

```

package body HENRY_DISPLAY is

```

```

-----
-----

```

```

--Pause print stops the printing of long lists so that the viewer
--can peruse the results without losing valuable data. It also
--returns boolean done plus integer count

```

```

procedure PAUSE_PRINT(STOP_COUNT : in INTEGER;
                      RUNNING_COUNT : in out INTEGER;
                      DONE : in out BOOLEAN) is

```

```

CH : CHARACTER := 'd';
COL, ROW : INTEGER;

```

```

begin
  if STOP_COUNT = RUNNING_COUNT then
    RUNNING_COUNT := 0;
    NEW_LINE;
    PUT(" --- (Q)uit or strike any other letter to continue --- ");
    NEW_LINE;
    get(CH);
    DONE := FALSE;
    DONE := ((CH = 'Q') OR (CH = 'q'));
    MOVE_CURSOR_LT(1); MOVE_CURSOR_UP(1); CLEAR_CURSOR_TO_EOL;
    MOVE_CURSOR_UP(1);
    CLEAR_CURSOR_TO_EOL;
  else RUNNING_COUNT := RUNNING_COUNT + 1;
  end if;

```

```

end PAUSE_PRINT;

```

```

-----

```

```

--Centers the input string to the visible screen of a VT 100

```

```

procedure CENTER_STRING(NAME : in ROW_STRING_TYPE;

```

IN_ROW, WIDTH : in INTEGER) is

```
SCREEN_WIDTH : INTEGER := 76;
CENTER_POS   : INTEGER := 0;
TEMP_NAME    : ROW_STRING_TYPE;
```

begin

```
  FOR I IN 1..30 LOOP
    TEMP_NAME(I) := NULL_CHAR;
  END LOOP;
  TEMP_NAME(1..WIDTH) := NAME(1..WIDTH);
  CENTER_POS := SCREEN_WIDTH / 2 - WIDTH / 2;
  SET_CURSOR_POS(CENTER_POS, IN_ROW);
  PUT(TEMP_NAME);
  NEW_LINE;
end CENTER_STRING;
```

-Puts the header of each data screen up with an underline to set it
--off from the data

procedure SET_UP_SCREEN(IN_STRING : in ROW_STRING_TYPE;
 STRING_SIZE : in INTEGER) is

begin

```
  CLEARSCREEN;
  SET_REVERSE(ON);
  CENTER_STRING(IN_STRING, 1, STRING_SIZE);
  SET_REVERSE(OFF);
  PUT("-----");
  NEW_LINE(2);
END SET_UP_SCREEN;
```

--lists the entire record stream of the Henry metric data

procedure LIST_HENRY_DATA is

```
SHORT_NAME_SIZE      : constant integer := 40;
TEMP_POINTER, T1      : POINTER := HEAD;
TEMP_NAME             : LEXEME_TYPE;
SHORT_NAME            : STRING(1..SHORT_NAME_SIZE);
SIZE                  : INTEGER := 0;
RUNNING_COUNT         : INTEGER := 1;
STOP                  : INTEGER := 2;
HEADER_STRING         : ROW_STRING_TYPE;
DONE                  : BOOLEAN := FALSE;
```

```

HEADER_SIZE      : INTEGER := 21;

begin
  HEADER_STRING(1..HEADER_SIZE) := "LIST OF HENRY RECORDS";
  PUT(HENRY_FILE, "IN LIST HENRY DATA"); NEW_LINE(HENRY_FILE);
  LOOP EXIT WHEN DONE;
  SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
  LOOP
    put("DECLARATION  : ");
    case TEMP_POINTER.IDENTITY is
      when LOCAL_DECLARE => put("Local declare");
      when GLOBAL_DECLARE => put("Global declare");
      when others        => put("Undeclared");
    end case;
    new_line;
    put("NAME          : ");
    if TEMP_POINTER.NOMEN(1) = NULL_CHAR then
      put("None");
    else
      TEMP_NAME(1..MAX_LINE_SIZE) :=
        TEMP_POINTER.NOMEN(1..MAX_LINE_SIZE);
      SHORT_NAME(1..SHORT_NAME_SIZE) := TEMP_NAME(1..SHORT_NAME_SIZE);
      put(SHORT_NAME);
      FOR I IN 1..SHORT_NAME_SIZE LOOP
        SHORT_NAME(I) := NULL_CHAR;
      END LOOP;
    end if;
    new_line;
    put("ACTION TYPE   : ");
    case TEMP_POINTER.TYPE_DEFINE is
      when UNDEFINED      => put("Undefined");
      when HENRY_HEAD_NODE => put("Henry Head Node");
      when PACKAGE_TYPE   => put("Package declaration");
      when PROCEDURE_TYPE => put("Procedure declaration");
      when FUNCTION_TYPE  => put("Function declaration");
      when PARAM_TYPE     => put("Parameter declaration");
      when ASSIGN_TYPE    => put("Assignment delimiter");
      when IDENT_TYPE     => put("Identifier");
      when DATA_STRUCTURE => put("Data structure descriptor");
      when FUNCALL_OR_DS  => put("Function or data descriptor");
      when PROCALL_OR_DS  => put("Procedure or data descriptor");
      when END_PARAM_DECLARE => put("End parameter delimiter");
      when END_ACTUAL_PARAM => put("End actual parameter delimiter");
      when END_DECLARATIONS => put("End declaration delimiter");
      when END_ASSIGN_TYPE  => put("End assignment statement delimiter");
      when END_PACKAGE_DECLARE => put("End package declaration delimiter");
      when END_PACKAGE_TYPE => put("End package delimiter");
      when END_FUNCTION_TYPE => put("End function delimiter");
      when END_PROCEDURE_CALL => put("End procedure delimiter");
      when others          => put("Unknown");
    end case;
    new_line;

```

```

put("PARAMETER TYPE : ");
case TEMP_POINTER.PARAM_TYPE is
when IN_TYPE => put("Input");
when OUT_TYPE => put("Output");
when IN_OUT_TYPE => put("Input/output");
when others => put("None");
end case;
new_line(2);
put("-----");
new_line(2);
PAUSE_PRINT(STOP, RUNNING_COUNT, DONE);
if (RUNNING_COUNT = 0) AND (NOT DONE) THEN
    RUNNING_COUNT := 1;
    SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
end if;
T1 := TEMP_POINTER.NEXT1;
TEMP_POINTER := T1;
EXIT WHEN (TEMP_POINTER = NULL) OR DONE;
end loop;
if NOT DONE THEN
    STOP := 1;
    RUNNING_COUNT := 1;
    put("***** End data collection records");
    put(" *****"); new_line;
    PAUSE_PRINT(STOP, RUNNING_COUNT, DONE);
end if;
end loop; --done loop
end LIST_HENRY_DATA;

```

```

--lists the metric calculation data for each procedure or function
--of the particular package analyzed. The data is held in a file
--called "Metric.data"

```

```

procedure LIST_METRIC_DATA is

```

```

IN_STRING : STRING(1..49);
NUMBER_OF : NATURAL;
TEMP_POINTER := HEAD.NEXT1;
STOP : INTEGER := 13;
RUNNING_COUNT : INTEGER := 1;
HEADER_STRING : ROW_STRING_TYPE;
DONE : BOOLEAN := FALSE;
HEADER_SIZE : INTEGER := 24;

```

```

begin

```

```

    PUT(HENRY_FILE, "IN LIST METRIC DATA"); NEW_LINE(HENRY_FILE);
    HEADER_STRING(1..HEADER_SIZE) := "LIST HENRY METRIC VALUES";
    if IS_OPEN(HENRY_OUT) then
        if OUT_FILE = MODE(HENRY_OUT) then

```

```

    RESET(HENRY_OUT, IN_FILE);
end if;
else OPEN(HENRY_OUT, IN_FILE, HENRY_OUT_NAME);
end if;
SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
IN_STRING(1..8) := "PACKAGE ";
IN_STRING(9..49) := INPUT_FILE_NAME(1..41);
put(IN_STRING);
NEW_LINE(2);
LOOP
    EXIT WHEN (END_OF_FILE(HENRY_OUT) OR DONE);
    FOR J IN 1..49 LOOP
        IN_STRING(J) := NULL_CHAR;
    END LOOP;
    GET_LINE(HENRY_OUT, IN_STRING, NUMBER_OF);
    PUT_LINE(IN_STRING);
    PAUSE_PRINT(STOP, RUNNING_COUNT, DONE);
    IF (RUNNING_COUNT = 0) AND (NOT DONE) THEN
        RUNNING_COUNT := 1;
        SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
    end if;
END LOOP;
IF (NOT DONE) THEN
    STOP := 1; RUNNING_COUNT := 1;
    PAUSE_PRINT(STOP, RUNNING_COUNT, DONE);
end if;
CLOSE(HENRY_OUT);

```

end LIST_METRIC_DATA;

--Lists the relative comparison metric data. This listing
--compares each procedure/function analyzed with for example the
--fan in numbers. It also gives a verbal report for each function/
--procedure.

procedure WRITE_RELATIVE_DATA is

```

INDICATOR1,
INDICATOR2,
INDICATOR3   : FLOAT := 0.0;
UPPER_LIMIT  : constant FLOAT := 4.0;
LOWER_LIMIT  : constant FLOAT := 0.25;
TEMP_HOLDER  : STRING(1..10);
STOP, RUNNING : INTEGER := 1;
HEADER_STRING : ROW_STRING_TYPE;
ROW_STRING    : ROW_STRING_TYPE;
SIZE          : INTEGER;
DONE          : BOOLEAN := FALSE;
HEADER_SIZE   : INTEGER := 29;

```

begin


```

HEADER_STRING(1..HEADER_SIZE) := "THE RELATIVE PERFORMANCE DATA";
SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
if PROC_FUNC_COUNT < 16 THEN STOP := PROC_FUNC_COUNT;
else STOP := 16;
end if;
PUT(HENRY_FILE, "IN WRITE RELATIVE DATA"); NEW_LINE(HENRY_FILE);

```

```

--name the outer loop so that can exit gracefully when the user
--wants to quit

```

```

OUTER_LOOP:
FOR J IN 1..7 LOOP
CASE J is
when 1 => ROW_STRING(1..6) := "FAN IN";
        SIZE := 6;
when 2 => ROW_STRING(1..7) := "FAN OUT";
        SIZE := 7;
when 3 => ROW_STRING(1..10) := "COMPLEXITY";
        SIZE := 10;
when 4 => ROW_STRING(1..11) := "GLOBAL READ";
        SIZE := 11;
when 5 => ROW_STRING(1..12) := "GLOBAL WRITE";
        SIZE := 12;
when 6 => ROW_STRING(1..17) := "GLOBAL READ WRITE";
        SIZE := 17;
when 7 => ROW_STRING(1..11) := "GLOBAL FLOW";
        SIZE := 11;
when others => null;
end case;
CENTER_STRING(ROW_STRING, 4, SIZE);
FOR I IN 1..PROC_FUNC_COUNT LOOP
SET_CURSOR_POS(1, I + 5);
REL_ARRAY(I).NAME_OF := OUT_PUT_DATA(I).NAME_OF;
PUT(REL_ARRAY(I).NAME_OF); SET_CURSOR_POS(42, I + 5); PUT(" : ");

```

```

--set up the names before write the data

```

```

CASE J is
when 1 => put(REL_ARRAY(I).TYPE_FAN_IN);
when 2 => put(REL_ARRAY(I).TYPE_FAN_OUT);
when 3 => put(REL_ARRAY(I).TYPE_COMPLEXITY);
when 4 => put(REL_ARRAY(I).TYPE_READ);
when 5 => put(REL_ARRAY(I).TYPE_WRITE);
when 6 => put(REL_ARRAY(I).TYPE_READ_WRITE);
when 7 => put(REL_ARRAY(I).TYPE_FLOW);
when others => null;
end case;
NEW_LINE;
PAUSE_PRINT(STOP, RUNNING, DONE);

```

```

--boolean done is set true by user answering the query to quit

```

```

EXIT OUTER_LOOP WHEN DONE;
if (RUNNING = 0) AND (STOP = 16) THEN
    STOP := PROC_FUNC_COUNT - 17;
elseif RUNNING = 0 THEN
    SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
    RUNNING := 1;
end if;
end loop;
end loop OUTER_LOOP;

```

--set up to loop again once have cycled through to first stop
--count. This means have filled the screen once

```

STOP := 1; RUNNING := 1;
PAUSE_PRINT(STOP, RUNNING, DONE);

```

```

CLEARSCREEN;
PUT("The following are the maximums for each calculation: ");
new_line;
put("-----");
new_line;
put("Fan In      : "); put(REL_ARRAY(MAX_FAN_IN).NAME_OF); new_line;
put("Fan Out     : "); put(REL_ARRAY(MAX_FAN_OUT).NAME_OF); new_line;
put("Complexity   : "); put(REL_ARRAY(MAX_COMPLEXITY).NAME_OF); NEW_LINE;
put("Global Read  : "); put(REL_ARRAY(MAX_READ).NAME_OF); NEW_LINE;
PUT("Global Write : "); put(REL_ARRAY(MAX_WRITE).NAME_OF); NEW_LINE;
PUT("Global Read Write : "); put(REL_ARRAY(MAX_READ_WRITE).NAME_OF); NEW_LINE;
PUT("Global Flow   : "); put(REL_ARRAY(MAX_FLOW).NAME_OF); NEW_LINE;
new_line;
put("-----");
new_line;
STOP := 1; RUNNING := 1;
PAUSE_PRINT(STOP, RUNNING, DONE);
SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);

```

--calculate the indicator numbers so that can determine the relative
--performance of each procedure/function within each category

```

FOR I IN 1..PROC_FUNC_COUNT LOOP
    if REL_ARRAY(I).TYPE_FLOW /= 0.0 THEN
        INDICATOR1 := REL_ARRAY(I).TYPE_COMPLEXITY /
            REL_ARRAY(I).TYPE_FLOW;
    else INDICATOR1 := REL_ARRAY(I).TYPE_COMPLEXITY;
    end if;
    if REL_ARRAY(I).TYPE_FAN_OUT /= 0.0 THEN
        INDICATOR2 := REL_ARRAY(I).TYPE_FAN_IN /
            REL_ARRAY(I).TYPE_FAN_OUT;
    else INDICATOR2 := REL_ARRAY(I).TYPE_FAN_IN;
    end if;
    if REL_ARRAY(I).TYPE_WRITE /= 0.0 THEN
        INDICATOR3 := REL_ARRAY(I).TYPE_READ /
            REL_ARRAY(I).TYPE_WRITE;
    end if;
end loop;

```

```

else INDICATOR3 := REL_ARRAY(I).TYPE_READ;
end if;
PUT(REL_ARRAY(I).NAME_OF); put(" : ");
new_line;

--put out the results of the indicator analysis

IF INDICATOR1 > UPPER_LIMIT THEN
  PUT(" - Has significant complexity compared to global data flow.");
  new_line;
  if INDICATOR2 > UPPER_LIMIT THEN
    put(" - This implies poor internal code structure. ");
    new_line;
    put(" - Consider modularization.");
    new_line;
  elsif INDICATOR2 < LOWER_LIMIT THEN
    PUT(" - This implies an extremely complex interface.");
    new_line;
  end if;
ELSIF INDICATOR1 < LOWER_LIMIT THEN
  PUT(" - Has significant global data flow compared to complexity.");
  new_line;
  if INDICATOR3 > UPPER_LIMIT THEN
    put(" - This implies an overworked data structure ");
    new_line;
    put(" - or a considerable number of function calls ");
    new_line;
    put(" - Consider redistributing the data structure into this module");
    new_line;
  elsif INDICATOR3 < LOWER_LIMIT THEN
    PUT(" - This implies a program stress point");
    new_line;
    put(" - or a critical data flow point");
    new_line;
    put(" - Consider reorganizing the data structure.");
    new_line;
  end if;
ELSE
  TEMP HOLDER(1..10) := REL_ARRAY(I).NAME_OF(1..10);
  put(" - Is a fairly well balanced "); put(TEMP HOLDER);
  new_line;
  put(" - This implies good modularization. ");
  new_line;
END IF;
STOP := 1; RUNNING := 1;
PAUSE PRINT(STOP, RUNNING, DONE);
EXIT WHEN DONE;
end loop;
if NOT DONE THEN
  STOP := 1; RUNNING := 1;
  PAUSE PRINT(STOP, RUNNING, DONE);
end if;

```

```
end WRITE_RELATIVE_DATA;
```

--produces a bar chart of each metric calculation for visual comparisons

procedure GRAPH_RELATIVE_DATA is

```
LOOP_CNT      : INTEGER;
ROW_STRING    : ROW_STRING_TYPE;
HEADER_STRING : ROW_STRING_TYPE;
SIZE          : INTEGER;
STOP, RUNNING : INTEGER := 1;
DONE          : BOOLEAN := FALSE;
SCALE         : INTEGER := 5;
NUM_LOOP_CNT,
REM_CNT       : INTEGER;
HEADER_SIZE   : INTEGER := 30;
```

begin

```
  NUM_LOOP_CNT := PROC_FUNC_COUNT / 5;
  REM_CNT      := PROC_FUNC_COUNT REM 5;
```

--loop count is the number of screens need to display
--remainder count is the partial screen that is left over

```
  HEADER_STRING(1..30) := "THE GRAPHICAL PERFORMANCE DATA";
  if NUM_LOOP_CNT >= 1 THEN STOP := 5;
  else STOP := REM_CNT;
  end if;
  PUT(HENRY_FILE, "IN WRITE RELATIVE DATA"); NEW_LINE(HENRY_FILE);
  SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
```

--set up to exit gracefully when the user wants to quit

GRAPH_LOOP:

FOR J IN 1..7 LOOP

CASE J is

```
  when 1 => ROW_STRING(1..6) := "FAN IN";
             SIZE := 6;
  when 2 => ROW_STRING(1..7) := "FAN OUT";
             SIZE := 7;
  when 3 => ROW_STRING(1..10) := "COMPLEXITY";
             SIZE := 10;
  when 4 => ROW_STRING(1..11) := "GLOBAL READ";
             SIZE := 11;
  when 5 => ROW_STRING(1..12) := "GLOBAL WRITE";
             SIZE := 12;
  when 6 => ROW_STRING(1..17) := "GLOBAL READ WRITE";
             SIZE := 17;
  when 7 => ROW_STRING(1..11) := "GLOBAL FLOW";
             SIZE := 11;
```

```

when others => null;
end case;

--set up to graph each of the Henry metric variables

CENTER_STRING(ROW_STRING, 4, SIZE);
FOR I IN 1..PROC_FUNC_COUNT LOOP
  new_line;
  REL_ARRAY(I).NAME_OF := OUT_PUT_DATA(I).NAME_OF;
  PUT(REL_ARRAY(I).NAME_OF); new_line;
  CASE J is
    when 1 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_FAN_IN);
    when 2 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_FAN_OUT);
    when 3 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_COMPLEXITY);
    when 4 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_READ);
    when 5 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_WRITE);
    when 6 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_READ_WRITE);
    when 7 => LOOP_CNT := SCALE * INTEGER(REL_ARRAY(I).TYPE_FLOW);
    when others => null;
  end case;

--set up scaling so that most of screen is filled when the relative
--score is maxed at 10

  FOR L IN 1..LOOP_CNT LOOP
    PUT("*");
  END LOOP;
  NEW_LINE(1);
  PAUSE_PRINT(STOP, RUNNING, DONE);
  EXIT GRAPH_LOOP WHEN DONE;

--graph loop actually prints the bar chart

  if (RUNNING = 0) AND (STOP < 5) THEN
    if PROC_FUNC_COUNT > 5 THEN
      STOP := 5;
    end if;
    SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
    RUNNING := 1;
  elsif (RUNNING = 0) AND (STOP = 5) THEN
    if PROC_FUNC_COUNT = 5 THEN
      SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
      RUNNING := 1;
    elsif PROC_FUNC_COUNT > 5 THEN
      NUM_LOOP_CNT := NUM_LOOP_CNT - 1;
      if NUM_LOOP_CNT >= 1 THEN STOP := 5; RUNNING := 1;
      elsif REM_CNT /= 0 THEN
        STOP := REM_CNT; RUNNING := 1;
      else SET_UP_SCREEN(HEADER_STRING, HEADER_SIZE);
        RUNNING := 1;
      end if;
    end if;
  end if;
end if;

```

```
end if;i
```

```
--all the above checks are for end of screen printing conditions
--they ensure that once a full screen has been displayed that a
--partial is scrolled but another full is reprinted
```

```
end loop;
end loop GRAPH_LOOP;

end GRAPH_RELATIVE_DATA;
```

```
-----

--this is the driver module called from Menu procedure which
--controls which display feature will be called and produces all
--the relative data numbers. It also does the initial calculations
--plus finds the normalized number presently set at 10 for
--full screen graph display
```

```
procedure VIEW_HENRY(SELECTOR : in integer) is
```

```
NORMALIZER : constant FLOAT := 10.0;
```

```
begin
```

```
  PUT(HENRY_FILE, "IN VIEW HENRY PROCEDURE"); NEW_LINE(HENRY_FILE);
  CALCULATE_METRIC(HEAD, HEAD_LINE);
```

```
--search for the maximums for each variable
```

```
FOR I IN 1..PROC_FUNC_COUNT LOOP
  IF OUT_PUT_DATA(I).TYPE_FAN_IN >
    OUT_PUT_DATA(MAX_FAN_IN).TYPE_FAN_IN THEN
    MAX_FAN_IN := I;
  END IF;
  IF OUT_PUT_DATA(I).TYPE_FAN_OUT >
    OUT_PUT_DATA(MAX_FAN_OUT).TYPE_FAN_OUT THEN
    MAX_FAN_OUT := I;
  END IF;
  IF OUT_PUT_DATA(I).TYPE_COMPLEXITY >
    OUT_PUT_DATA(MAX_COMPLEXITY).TYPE_COMPLEXITY THEN
    MAX_COMPLEXITY := I;
  END IF;
  IF OUT_PUT_DATA(I).TYPE_READ >
    OUT_PUT_DATA(MAX_READ).TYPE_READ THEN
    MAX_READ := I;
  END IF;
  IF OUT_PUT_DATA(I).TYPE_WRITE >
    OUT_PUT_DATA(MAX_WRITE).TYPE_WRITE THEN
    MAX_WRITE := I;
  END IF;
```



```

IF OUT_PUT_DATA(I).TYPE_READ_WRITE >
    OUT_PUT_DATA(MAX_READ_WRITE).TYPE_READ_WRITE THEN
    MAX_READ_WRITE := I;
END IF;
IF OUT_PUT_DATA(I).TYPE_FLOW >
    OUT_PUT_DATA(MAX_FLOW).TYPE_FLOW THEN
    MAX_FLOW := I;
END IF;
END LOOP;

```

--calculate the normalized output number

```

FOR I IN 1..PROC_FUNC_COUNT LOOP

```

```

    if OUT_PUT_DATA(MAX_FAN_IN).TYPE_FAN_IN /= 0.0 then
        REL_ARRAY(I).TYPE_FAN_IN := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_FAN_IN /
            OUT_PUT_DATA(MAX_FAN_IN).TYPE_FAN_IN);
    else REL_ARRAY(I).TYPE_FAN_IN := 0.0;
    end if;

```

```

    if OUT_PUT_DATA(MAX_FAN_OUT).TYPE_FAN_OUT /= 0.0 THEN
        REL_ARRAY(I).TYPE_FAN_OUT := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_FAN_OUT /
            OUT_PUT_DATA(MAX_FAN_OUT).TYPE_FAN_OUT);
    else REL_ARRAY(I).TYPE_FAN_OUT := 0.0;
    end if;

```

```

    if OUT_PUT_DATA(MAX_COMPLEXITY).TYPE_COMPLEXITY /= 0.0 THEN
        REL_ARRAY(I).TYPE_COMPLEXITY := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_COMPLEXITY /
            OUT_PUT_DATA(MAX_COMPLEXITY).TYPE_COMPLEXITY);
    else REL_ARRAY(I).TYPE_COMPLEXITY := 0.0;
    end if;

```

```

    if OUT_PUT_DATA(MAX_READ).TYPE_READ /= 0.0 THEN
        REL_ARRAY(I).TYPE_READ := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_READ /
            OUT_PUT_DATA(MAX_READ).TYPE_READ);
    else REL_ARRAY(I).TYPE_READ := 0.0;
    end if;

```

```

    if OUT_PUT_DATA(MAX_WRITE).TYPE_WRITE /= 0.0 THEN
        REL_ARRAY(I).TYPE_WRITE := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_WRITE /
            OUT_PUT_DATA(MAX_WRITE).TYPE_WRITE);
    else REL_ARRAY(I).TYPE_WRITE := 0.0;
    end if;

```

```

    if OUT_PUT_DATA(MAX_READ_WRITE).TYPE_READ_WRITE /= 0.0 THEN
        REL_ARRAY(I).TYPE_READ_WRITE := NORMALIZER *
        (OUT_PUT_DATA(I).TYPE_READ_WRITE /

```

```

        OUT_PUT_DATA(MAX_READ_WRITE).TYPE_READ_WRITE);
else REL_ARRAY(I).TYPE_READ_WRITE := 0.0;
end if;

```

```

if OUT_PUT_DATA(MAX_FLOW).TYPE_FLOW /= 0.0 THEN
REL_ARRAY(I).TYPE_FLOW := NORMALIZER *
(OUT_PUT_DATA(I).TYPE_FLOW /
        OUT_PUT_DATA(MAX_FLOW).TYPE_FLOW);
else REL_ARRAY(I).TYPE_FLOW := 0.0;
end if;

```

```

END LOOP;

```

```

case SELECTOR is
when 1 => LIST_HENRY_DATA;
when 2 => LIST_METRIC_DATA;
when 3 => WRITE_RELATIVE_DATA;
when 4 => GRAPH_RELATIVE_DATA;
when others => null;
end case;
FIRST_HENRY_CALL := FALSE;
END VIEW_HENRY;
END HENRY_DISPLAY;

```

APPENDIX C: MODIFIED PARSERS

```
--*****--
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME: PACKAGE BYPASS_FUNCTION
-- DATE CREATED: 25 JUL 86
-- LAST MODIFIED: 16 APR 87
--
-- AUTHORS:    LCDR JEFFREY L. NIEDER
--             LT KARL S. FAIRBANKS, JR.
--             LCDR PAUL M. HERZIG
--
-- DESCRIPTION: This package contains the workhorse function
--              required to identify each individual token.
--
--*****--
```

with HALSTEAD_METRIC, BYPASS_SUPPORT_FUNCTIONS, GLOBAL,
GLOBAL_PARSER, HENRY_GLOBAL, HENRY, TEXT_IO;
use HALSTEAD_METRIC, BYPASS_SUPPORT_FUNCTIONS, GLOBAL,
GLOBAL_PARSER, HENRY_GLOBAL, HENRY, TEXT_IO;

package BYPASS_FUNCTION is

```
function BYPASS(TOKEN_ARRAY_ENTRY_CODE : integer) return boolean;
procedure CONDUCT_RESERVE_WORD_TEST(CONSUME : in out boolean);
end BYPASS_FUNCTION;
```

package body BYPASS_FUNCTION is

```
-- this function compares the lexeme of the current token with the
-- token currently being sought by the parser. If the current token
-- type is identifier, then a test is conducted to ensure it is not
-- a reserved word.
function BYPASS(TOKEN_ARRAY_ENTRY_CODE : integer) return boolean is
  CONSUME          : boolean := FALSE;
  LEXEME           : string(1..LINESIZE);
  SIZE             : natural;
  HENRY_LEXEME     : string(1..MAX_LINE_SIZE);

begin
  GET_CURRENT_TOKEN_RECORD(CURRENT_TOKEN_RECORD, LEXEME_LENGTH);
  LEXEME := CURRENT_TOKEN_RECORD.LEXEME;
  SIZE := CURRENT_TOKEN_RECORD.LEXEME_SIZE - 1;
```

```

FOR I IN 1..MAX_LINE_SIZE LOOP
  HENRY_LEXEME(I) := NULL_CHAR;
END LOOP;
HENRY_LEXEME (1..SIZE) := LEXEME(1..SIZE);

```

```

case TOKEN_ARRAY_ENTRY_CODE is
  when TOKEN_IDENTIFIER =>
    if (CURRENT_TOKEN_RECORD.TOKEN_TYPE = IDENTIFIER) then
      CONSUME := TRUE;
      CONDUCT_RESERVE_WORD_TEST(CONSUME);
    end if;
    if (CONSUME) then
      CONVERT_UPPER_CASE(HENRY_LEXEME, SIZE);
      CONVERT_UPPER_CASE(LEXEME, SIZE);
      if HENRY_WRITE_ENABLE then
        put(RESULT_FILE, "in bypass at identifier "); new_line(RESULT_FILE);
        WRITE_HENRY_DATA(BLANK, HENRY_LEXEME, IDENT_TYPE, NONE, NEXT_HEN);
        CREATE_NODE(NEXT_HEN, LAST_RECORD);
        HENRY_WRITE_ENABLE := FALSE;
      end if;
      OPERAND_METRIC(HEAD_NODE, CURRENT_TOKEN_RECORD, DECLARE_TYPE);
      DECLARE_TYPE := VARIABLE_DECLARE;
    end if;

  when TOKEN_NUMERIC_LITERAL =>
    if (CURRENT_TOKEN_RECORD.TOKEN_TYPE = NUMERIC_LIT) then
      CONSUME := TRUE;
      DECLARE_TYPE := CONSTANT_DECLARE;
      OPERAND_METRIC(HEAD_NODE, CURRENT_TOKEN_RECORD, DECLARE_TYPE);
      DECLARE_TYPE := VARIABLE_DECLARE;
      if HENRY_WRITE_ENABLE then
        WRITE_HENRY_DATA(LOCAL_DECLARE, HENRY_LEXEME, IDENT_TYPE,
          NONE, NEXT_HEN);
        CREATE_NODE(NEXT_HEN, LAST_RECORD);
        HENRY_WRITE_ENABLE := FALSE;
      end if;
    end if;

  when TOKEN_CHARACTER_LITERAL =>
    if (CURRENT_TOKEN_RECORD.TOKEN_TYPE = CHARACTER_LIT) then
      if HENRY_WRITE_ENABLE then
        WRITE_HENRY_DATA(LOCAL_DECLARE, HENRY_LEXEME, IDENT_TYPE,
          NONE, NEXT_HEN);
        CREATE_NODE(NEXT_HEN, LAST_RECORD);
        HENRY_WRITE_ENABLE := FALSE;
      end if;
      CONSUME := TRUE;
    end if;

  when TOKEN_STRING_LITERAL =>
    if (CURRENT_TOKEN_RECORD.TOKEN_TYPE = STRING_LIT) then

```

```

    CONSUME := TRUE;
    if HENRY_WRITE_ENABLE then
        WRITE_HENRY_DATA(LOCAL_DECLARE, HENRY_LEXEME, IDENT_TYPE,
            NONE, NEXT_HEN);
        CREATE_NODE(NEXT_HEN, LAST_RECORD);
        HENRY_WRITE_ENABLE := FALSE;
    end if;
end if;

when TOKEN_END =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "end") then
        CONSUME := TRUE;
    end if;

when TOKEN_BEGIN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "begin") then
        CONSUME := TRUE;
    end if;

when TOKEN_IF =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "if") then
        CONSUME := TRUE;
    end if;

when TOKEN_THEN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "then") then
        CONSUME := TRUE;
    end if;

when TOKEN_ELSIF =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "elsif") then
        CONSUME := TRUE;
    end if;

when TOKEN_ELSE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "else") then
        CONSUME := TRUE;
    end if;

when TOKEN_WHILE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "while") then
        CONSUME := TRUE;
    end if;

when TOKEN_LOOP =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "loop") then
        CONSUME := TRUE;
    end if;

when TOKEN_CASE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "case") then
        CONSUME := TRUE;

```

```

    end if;

when TOKEN WHEN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "when") then
        CONSUME := TRUE;
    end if;

when TOKEN DECLARE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "declare") then
        CONSUME := TRUE;
    end if;

when TOKEN FOR =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "for") then
        CONSUME := TRUE;
    end if;

when TOKEN OTHERS =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "others") then
        CONSUME := TRUE;
    end if;

when TOKEN RETURN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "return") then
        CONSUME := TRUE;
    end if;

when TOKEN EXIT =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "exit") then
        CONSUME := TRUE;
    end if;

when TOKEN PROCEDURE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "procedure") then
        CONSUME := TRUE;
    end if;

when TOKEN FUNCTION =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "function") then
        CONSUME := TRUE;
    end if;

when TOKEN WITH =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "with") then
        CONSUME := TRUE;
    end if;

when TOKEN USE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "use") then
        CONSUME := TRUE;
    end if;

```



```

when TOKEN_PACKAGE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "package") then
    CONSUME := TRUE;
  end if;

when TOKEN_BODY =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "body") then
    CONSUME := TRUE;
  end if;

when TOKEN_RANGE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "range") then
    CONSUME := TRUE;
  end if;

when TOKEN_IN =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "in") then
    CONSUME := TRUE;
  end if;

when TOKEN_OUT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "out") then
    CONSUME := TRUE;
  end if;

when TOKEN_SUBTYPE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "subtype") then
    CONSUME := TRUE;
  end if;

when TOKEN_TYPE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "type") then
    CONSUME := TRUE;
  end if;

when TOKEN_IS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "is") then
    CONSUME := TRUE;
  end if;

when TOKEN_NULL =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "null") then
    CONSUME := TRUE;
  end if;

when TOKEN_ACCESS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "access") then
    CONSUME := TRUE;
  end if;

when TOKEN_ARRAY =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "array") then

```

```

    CONSUME := TRUE;
end if;

when TOKEN_DIGITS =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "digits") then
        CONSUME := TRUE;
    end if;

when TOKEN_DELTA =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "delta") then
        CONSUME := TRUE;
    end if;

when TOKEN_RECORD_STRUCTURE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "record") then
        CONSUME := TRUE;
    end if;

when TOKEN_CONSTANT =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "constant") then
        CONSUME := TRUE;
    end if;

when TOKEN_NEW =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "new") then
        CONSUME := TRUE;
    end if;

when TOKEN_EXCEPTION =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "exception") then
        CONSUME := TRUE;
    end if;

when TOKEN_RENAMES =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "renames") then
        CONSUME := TRUE;
    end if;

when TOKEN_PRIVATE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "private") then
        CONSUME := TRUE;
    end if;

when TOKEN_LIMITED =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "limited") then
        CONSUME := TRUE;
    end if;

when TOKEN_TASK =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "task") then
        CONSUME := TRUE;
    end if;

```

```

when TOKEN_ENTRY =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "entry") then
    CONSUME := TRUE;
  end if;

when TOKEN_ACCEPT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "accept") then
    CONSUME := TRUE;
  end if;

when TOKEN_DELAY =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "delay") then
    CONSUME := TRUE;
  end if;

when TOKEN_SELECT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "select") then
    CONSUME := TRUE;
  end if;

when TOKEN_TERMINATE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "terminate") then
    CONSUME := TRUE;
  end if;

when TOKEN_ABORT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "abort") then
    CONSUME := TRUE;
  end if;

when TOKEN_SEPARATE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "separate") then
    CONSUME := TRUE;
  end if;

when TOKEN_RAISE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "raise") then
    CONSUME := TRUE;
  end if;

when TOKEN_GENERIC =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "generic") then
    CONSUME := TRUE;
  end if;

when TOKEN_AT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "at") then
    CONSUME := TRUE;
  end if;

when TOKEN_REVERSE =>

```

```

    if (ADJUST_LEXEME(LEXEME, SIZE) = "reverse") then
        CONSUME := TRUE;
    end if;

when TOKEN_DO =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "do") then
        CONSUME := TRUE;
    end if;

when TOKEN_GOTO =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "goto") then
        CONSUME := TRUE;
    end if;

when TOKEN_OF =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "of") then
        CONSUME := TRUE;
    end if;

when TOKEN_ALL =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "all") then
        CONSUME := TRUE;
    end if;

when TOKEN_PRAGMA =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "pragma") then
        CONSUME := TRUE;
    end if;

when TOKEN_AND =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "and") then
        CONSUME := TRUE;
    end if;
    OPERATOR_METRIC(TOKEN_AND, CONSUME, RESERVE_WORD_TEST);

when TOKEN_OR =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "or") then
        CONSUME := TRUE;
    end if;
    OPERATOR_METRIC(TOKEN_OR, CONSUME, RESERVE_WORD_TEST);

when TOKEN_NOT =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "not") then
        CONSUME := TRUE;
    end if;
    OPERATOR_METRIC(TOKEN_NOT, CONSUME, RESERVE_WORD_TEST);

when TOKEN_XOR =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "xor") then
        CONSUME := TRUE;
    end if;
    OPERATOR_METRIC(TOKEN_XOR, CONSUME, RESERVE_WORD_TEST);

```

```

when TOKEN_MOD =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "mod") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_MOD, CONSUME, RESERVE_WORD_TEST);

when TOKEN_REM =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "rem") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_REM, CONSUME, RESERVE_WORD_TEST);

when TOKEN_ABSOLUTE =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "abs") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_ABSOLUTE, CONSUME, RESERVE_WORD_TEST);

when TOKEN_ASTERISK =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "**") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_ASTERISK, CONSUME, RESERVE_WORD_TEST);

when TOKEN_SLASH =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "/") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_SLASH, CONSUME, RESERVE_WORD_TEST);

when TOKEN_EXPONENT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "**") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_EXPONENT, CONSUME, RESERVE_WORD_TEST);

when TOKEN_PLUS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "+") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_PLUS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_MINUS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "-") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_MINUS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_AMPERSAND =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "&") then
    CONSUME := TRUE;

```

```

end if;
OPERATOR_METRIC(TOKEN_AMPERSAND, CONSUME, RESERVE_WORD_TEST);

when TOKEN_EQUALS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "=") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_EQUALS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_NOT_EQUALS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "/=") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_NOT_EQUALS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_LESS_THAN =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "<") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_LESS_THAN, CONSUME, RESERVE_WORD_TEST);

when TOKEN_LESS_THAN_EQUALS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = "<=") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_LESS_THAN_EQUALS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_GREATER_THAN =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = ">") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_GREATER_THAN, CONSUME, RESERVE_WORD_TEST);

when TOKEN_GREATER_THAN_EQUALS =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = ">=") then
    CONSUME := TRUE;
  end if;
  OPERATOR_METRIC(TOKEN_GREATER_THAN_EQUALS, CONSUME, RESERVE_WORD_TEST);

when TOKEN_ASSIGNMENT =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = ":=") then
    CONSUME := TRUE;
    OPERATOR_METRIC(TOKEN_ASSIGNMENT, CONSUME, RESERVE_WORD_TEST);
  end if;

when TOKEN_COMMA =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = ",") then
    CONSUME := TRUE;
  end if;

when TOKEN_SEMICOLON =>
  if (ADJUST_LEXEME(LEXEME, SIZE) = ";") then

```



```

    UPDATE LINE_COUNT;
    CONSUME := TRUE;
end if;

when TOKEN_PERIOD =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = ".") then
        CONSUME := TRUE;
    end if;

when TOKEN_LEFT_PAREN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "(") then
        CONSUME := TRUE;
    end if;

when TOKEN_RIGHT_PAREN =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = ")") then
        CONSUME := TRUE;
    end if;

when TOKEN_COLON =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = ":") then
        CONSUME := TRUE;
    end if;

when TOKEN_APOSTROPHE =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "'") then
        CONSUME := TRUE;
    end if;

when TOKEN_RANGE_DOTS =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "..") then
        CONSUME := TRUE;
    end if;

when TOKEN_ARROW =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = ">") then
        CONSUME := TRUE;
    end if;

when TOKEN_BAR =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "|") then
        CONSUME := TRUE;
    end if;

when TOKEN_BRACKETS =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "<>") then
        CONSUME := TRUE;
    end if;

when TOKEN_LEFT_BRACKET =>
    if (ADJUST_LEXEME(LEXEME, SIZE) = "<") then
        CONSUME := TRUE;

```

```

        end if;

        when TOKEN_RIGHT_BRACKET =>
            if (ADJUST_LEXEME(LEXEME, SIZE) = ">>") then
                CONSUME := TRUE;
            end if;

        when others => null;
    end case;

    ADJUST_TOKEN_BUFFER(CONSUME, RESERVE_WORD_TEST);

    return (CONSUME);
end BYPASS;

-----

-- this procedure tests all identifiers to verify they are not reserved
-- words. The most common reserved words are tested first and the process
-- halts when a match is made or the test fails.
procedure CONDUCT_RESERVE_WORD_TEST(CONSUME : in out boolean) is
begin
    RESERVE_WORD_TEST := TRUE;
    for RESERVE_WORD_INDEX in TOKEN_END..TOKEN_ABSOLUTE loop
        if (BYPASS(RESERVE_WORD_INDEX)) then
            CONSUME := FALSE;
        end if;
        exit when not CONSUME;
    end loop;
    RESERVE_WORD_TEST := FALSE;
end CONDUCT_RESERVE_WORD_TEST;

end BYPASS_FUNCTION;

```

```

-- *****
--
-- TITLE:          AN ADA SOFTWARE METRIC
--
-- MODULE NAME:    PACKAGE PARSER_0
-- DATE CREATED:   09 OCT 86
-- LAST MODIFIED:  30 MAY 87
--
-- AUTHORS:        LCDR JEFFREY L. NIEDER
--                  LT KARL S. FAIRBANKS, JR.
--                  LCDR PAUL M. HERZIG
-- DESCRIPTION:    This package contains eight functions that
--                  make up the highest level productions for our top-down,
--                  recursive descent parser.
--
-- *****

```

```

with PARSE_1, PARSE_2, PARSE_3, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
    HALSTEAD_METRIC, GLOBAL_PARSER, GLOBAL, TEXT_IO;
use PARSE_1, PARSE_2, PARSE_3, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
    HALSTEAD_METRIC, GLOBAL_PARSER, GLOBAL, TEXT_IO;

```

```

package PARSE_0 is
    function COMPILATION return boolean;
    function COMPILATION_UNIT return boolean;
    function CONTEXT_CLAUSE return boolean;
    function BASIC_UNIT return boolean;
    function LIBRARY_UNIT return boolean;
    function SECONDARY_UNIT return boolean;
    function LIBRARY_UNIT_BODY return boolean;
    function SUBUNIT return boolean;
end PARSE_0;

```

```

-----
-----

package body PARSE_0 is

```

```

    -- COMPILATION --> [COMPILATION_UNIT]+
    function COMPILATION return boolean is
    begin
        put("In compilation "); new_line;
        put(RESULT_FILE, "In compilation "); new_line(RESULT_FILE);
        if (COMPILATION_UNIT) then
            while (COMPILATION_UNIT) loop
                null;
            end loop;
            return (TRUE);
        else
            return (FALSE);
        end if;
    end COMPILATION;

```

```

-----

    -- COMPILATION_UNIT --> CONTEXT_CLAUSE BASIC_UNIT
    function COMPILATION_UNIT return boolean is
    begin
        put(RESULT_FILE, "In compilation_unit "); new_line(RESULT_FILE);
        if (CONTEXT_CLAUSE) then
            if (BASIC_UNIT) then
                return (TRUE);
            else
                return (FALSE);
            end if;
        else
            return (FALSE);
        end if;
    end COMPILATION_UNIT;

```

```

-----
-- CONTEXT_CLAUSE --> [with WITH_OR_USE_CLAUSE [use WITH_OR_USE_CLAUSE]* ]*
function CONTEXT_CLAUSE return boolean is
begin
put(RESULT_FILE, "In context_clause "); new_line(RESULT_FILE);
while (BYPASS(TOKEN_WITH)) loop
  if not (WITH_OR_USE_CLAUSE) then
    SYNTAX_ERROR("Context clause");
  end if;
  while (BYPASS(TOKEN_USE)) loop
    if not (WITH_OR_USE_CLAUSE) then
      SYNTAX_ERROR("Context clause");
    end if;
  end loop;
end loop;
-- inner while loop
-- outer while loop
return (TRUE);
end CONTEXT_CLAUSE;

```

```

-----
-- BASIC_UNIT --> LIBRARY_UNIT
--              --> SECONDARY_UNIT
function BASIC_UNIT return boolean is
begin
put(RESULT_FILE, "In basic_unit "); new_line(RESULT_FILE);
if (LIBRARY_UNIT) then
  return (TRUE);
elsif (SECONDARY_UNIT) then
  return (TRUE);
else
  return (FALSE);
end if;
end BASIC_UNIT;

```

```

-----
-- LIBRARY_UNIT --> procedure PROCEDURE_UNIT
--              --> function FUNCTION_UNIT
--              --> package PACKAGE_DECLARATION
--              --> generic GENERIC_DECLARATION
function LIBRARY_UNIT return boolean is
begin
put(RESULT_FILE, "In library_unit "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_PROCEDURE)) then
  DECLARE_TYPE := PROCEDURE_DECLARE;
  if (PROCEDURE_UNIT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Library unit");
  end if;
  -- if procedure_unit statement
elsif (BYPASS(TOKEN_FUNCTION)) then

```

```

DECLARE_TYPE := FUNCTION_DECLARE;
if (FUNCTION_UNIT) then
    return (TRUE);
else
    SYNTAX_ERROR("Library unit");
end if;
-- if function_unit statement
elsif (BYPASS(TOKEN_PACKAGE)) then
    DECLARE_TYPE := PACKAGE_DECLARE;
    if (PACKAGE_DECLARATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Library unit");
    end if;
    -- if package_declaration
elsif (BYPASS(TOKEN_GENERIC)) then
    if (GENERIC_DECLARATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Library unit");
    end if;
    -- if generic_declaration
else
    return (FALSE);
end if;
end LIBRARY_UNIT;

```

```

-----
-- SECONDARY_UNIT --> LIBRARY_UNIT_BODY
--                --> SUBUNIT
function SECONDARY_UNIT return boolean is
begin
    put(RESULT_FILE, "In secondary_unit "); new_line(RESULT_FILE);
    if (LIBRARY_UNIT_BODY) then
        return (TRUE);
    elsif (SUBUNIT) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end SECONDARY_UNIT;

```

```

-----
-- LIBRARY_UNIT_BODY --> procedure PROCEDURE_UNIT
--                    --> function FUNCTION_UNIT
--                    --> package PACKAGE_DECLARATION
--                    --> generic GENERIC_DECLARATION
function LIBRARY_UNIT_BODY return boolean is
begin
    put(RESULT_FILE, "In library_unit body "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_PROCEDURE)) then
        DECLARE_TYPE := PROCEDURE_DECLARE;
        if (PROCEDURE_UNIT) then

```

```

    return (TRUE);
else
    SYNTAX_ERROR("Library unit body");
end if;
-- if procedure_unit statement
elsif (BYPASS(TOKEN_FUNCTION)) then
    DECLARE_TYPE := FUNCTION_DECLARE;
    if (FUNCTION_UNIT) then
        return (TRUE);
    else
        SYNTAX_ERROR("Library unit body");
    end if;
    -- if function_unit statement
elsif (BYPASS(TOKEN_PACKAGE)) then
    DECLARE_TYPE := PACKAGE_DECLARE;
    HENRY_WRITE_ENABLE := TRUE;
    put(result_file, "true"); new_line(result_file);
    if (PACKAGE_DECLARATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Library unit body");
    end if;
    -- if package_declaration
else
    return (FALSE);
end if;
-- if bypass(token_procedure)
end LIBRARY_UNIT_BODY;

```

```

-- SUBUNIT --> separate (NAME) PROPER_BODY
function SUBUNIT return boolean is
begin
    put(RESULT_FILE, "In subunit "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_SEPARATE)) then
        if (BYPASS(TOKEN_LEFT_PAREN)) then
            if (NAME) then
                if (BYPASS(TOKEN_RIGHT_PAREN)) then
                    if (PROPER_BODY) then
                        return (TRUE);
                    else
                        SYNTAX_ERROR("Subunit");
                    end if;
                    -- if proper_body statement
                else
                    SYNTAX_ERROR("Subunit");
                end if;
                -- if bypass(token_right_paren)
            else
                SYNTAX_ERROR("Subunit");
            end if;
            -- if name statement
        else
            SYNTAX_ERROR("Subunit");
        end if;
        -- if bypass(token_left_paren)
    else
        return (FALSE);
    end if;
    -- if bypass(token_separate)

```


end SUBUNIT;

end PARSER_0;

```
--*****--
--
-- TITLE:          AN ADA SOFTWARE METRIC
--
-- MODULE NAME:    PACKAGE PARSER_1
-- DATE CREATED:   17 JUL 86
-- LAST MODIFIED:  30 MAY 87
--
-- AUTHORS:        LCDR JEFFREY L. NIEDER
--                  LT KARL S. FAIRBANKS, JR.
--                  LCDR PAUL M. HERZIG
-- DESCRIPTION:    This package contains thirty-six functions
--                  that make up the top level productions for our top-down,
--                  recursive descent parser. Each function is preceded
--                  by the grammar productions they are implementing.
--
--*****--
```

with PARSER_2, PARSER_3, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
HALSTEAD_METRIC, GLOBAL_PARSER, GLOBAL, TEXT_IO;
use PARSER_2, PARSER_3, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
HALSTEAD_METRIC, GLOBAL_PARSER, GLOBAL, TEXT_IO;

package PARSER_1 is

```
function GENERIC_DECLARATION return boolean;
function GENERIC_PARAMETER_DECLARATION return boolean;
function GENERIC_FORMAL_PART return boolean;
function PROCEDURE_UNIT return boolean;
function SUBPROGRAM_BODY return boolean;
function FUNCTION_UNIT return boolean;
function FUNCTION_UNIT_TAIL return boolean;
function FUNCTION_BODY return boolean;
function FUNCTION_BODY_TAIL return boolean;
function TASK_DECLARATION return boolean;
function TASK_BODY return boolean;
function TASK_BODY_TAIL return boolean;
function PACKAGE_DECLARATION return boolean;
function PACKAGE_UNIT return boolean;
function PACKAGE_BODY return boolean;
function PACKAGE_BODY_TAIL return boolean;
function PACKAGE_TAIL_END return boolean;
function DECLARATIVE_PART return boolean;
function BASIC_DECLARATIVE_ITEM return boolean;
function BASIC_DECLARATION return boolean;
function LATER_DECLARATIVE_ITEM return boolean;
function PROPER_BODY return boolean;
```

```

function SEQUENCE_OF_STATEMENTS return boolean;
function STATEMENT return boolean;
function COMPOUND_STATEMENT return boolean;
function BLOCK_STATEMENT return boolean;
function IF_STATEMENT return boolean;
function CASE_STATEMENT return boolean;
function CASE_STATEMENT_ALTERNATIVE return boolean;
function LOOP_STATEMENT return boolean;
function EXCEPTION_HANDLER return boolean;
function ACCEPT_STATEMENT return boolean;
function SELECT_STATEMENT return boolean;
function SELECT_STATEMENT_TAIL return boolean;
function SELECT_ALTERNATIVE return boolean;
function SELECT_ENTRY_CALL return boolean;
end PARSER_1;

```

```

-----
-----

package body PARSER_1 is

```

```

    -- GENERIC_DECLARATION --> [GENERIC_PARAMETER_DECLARATION ?]
    --                                GENERIC_FORMAL_PART
function GENERIC_DECLARATION return boolean is
begin
    put(RESULT_FILE,"In generic declaration "); new_line(RESULT_FILE);
    if (GENERIC_PARAMETER_DECLARATION) then
        null;
    end if;
    if (GENERIC_FORMAL_PART) then
        return(TRUE);
    else
        return (FALSE);
    end if;
end GENERIC_DECLARATION;

```

```

-----

    -- GENERIC_PARAMETER_DECLARATION --> IDENTIFIER_LIST : [MODE ?] NAME
    --                                [= EXPRESSION ?] ;
    --                                --> type private [DISCRIMINANT_PART ?]
    --                                is PRIVATE_TYPE_DECLARATION ;
    --                                --> type private [DISCRIMINANT_PART ?]
    --                                is GENERIC_TYPE_DEFINITION ;
    --                                --> with procedure PROCEDURE_UNIT
    --                                --> with function FUNCTION_UNIT
function GENERIC_PARAMETER_DECLARATION return boolean is
begin
    put(RESULT_FILE, "In generic parameter declaration "); new_line(RESULT_FILE);
    if (IDENTIFIER_LIST) then
        if (BYPASS(TOKEN_COLON)) then
            if (MODE) then

```

```

    null;
end if;                                -- if mode statement
if (NAME) then                          -- check for type _mark
    if (BYPASS(TOKEN_ASSIGNMENT)) then
        if (EXPRESSION) then
            null;
        else
            SYNTAX_ERROR("Generic parameter declaration");
        end if;                        -- if expression statement
    end if;                            -- if bypass(token_assignment)
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Generic parameter declaration");
    end if;                            -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Generic parameter declaration");
end if;                                -- if type _mark statement
else
    SYNTAX_ERROR("Generic parameter declaration");
end if;                                -- if bypass(token_colon)
elsif (BYPASS(TOKEN_TYPE)) then
    if (BYPASS(TOKEN_IDENTIFIER)) then
        if (DISCRIMINANT_PART) then
            null;
        end if;                        -- if discriminant_part
    if (BYPASS(TOKEN_IS)) then
        if (PRIVATE_TYPE_DECLARATION) then
            if (BYPASS(TOKEN_SEMICOLON)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Generic parameter declaration");
            end if;                    -- if bypass(token_semicolon)
        elsif (GENERIC_TYPE_DEFINITION) then
            if (BYPASS(TOKEN_SEMICOLON)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Generic parameter declaration");
            end if;                    -- if bypass(token_semicolon)
        else
            SYNTAX_ERROR("Generic parameter declaration");
        end if;                        -- if private_type_declaration
    else
        SYNTAX_ERROR("Generic parameter declaration");
    end if;                            -- if private_type_declaration
else
    SYNTAX_ERROR("Generic parameter declaration");
end if;                                -- if bypass(token_is)
else
    SYNTAX_ERROR("Generic parameter declaration");
end if;                                -- if bypass(token_identifier)
elsif (BYPASS(TOKEN_WITH)) then
    if (BYPASS(TOKEN_PROCEDURE)) then
        DECLARE_TYPE := PROCEDURE_DECLARE;
        if (PROCEDURE_UNIT) then

```

```

    return (TRUE);
else
    SYNTAX_ERROR("Generic parameter declaration");
end if; -- if procedure_unit statement
elsif (BYPASS(TOKEN_FUNCTION)) then
    DECLARE_TYPE := FUNCTION_DECLARE;
    if (FUNCTION_UNIT) then
        return (TRUE);
    else
        SYNTAX_ERROR("Generic parameter declaration");
    end if; -- if function_unit statement
else
    SYNTAX_ERROR("Generic parameter declaration");
end if; -- if bypass(token_procedure)
else
    return (FALSE);
end if; -- if identifier_list
end GENERIC_PARAMETER_DECLARATION;

```

```

-----

-- GENERIC_FORMAL_PART --> procedure PROCEDURE_UNIT
--                        --> function FUNCTION_UNIT
--                        --> package PACKAGE_DECLARATION
function GENERIC_FORMAL_PART return boolean is
begin
    put(RESULT_FILE, "In generic formal part "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_PROCEDURE)) then
        DECLARE_TYPE := PROCEDURE_DECLARE;
        if (PROCEDURE_UNIT) then
            return (TRUE);
        else
            SYNTAX_ERROR("Generic formal part");
        end if; -- if procedure_unit statement
    elsif (BYPASS(TOKEN_FUNCTION)) then
        DECLARE_TYPE := FUNCTION_DECLARE;
        if (FUNCTION_UNIT) then
            return (TRUE);
        else
            SYNTAX_ERROR("Generic formal part");
        end if; -- if function_unit statement
    elsif (BYPASS(TOKEN_PACKAGE)) then
        DECLARE_TYPE := PACKAGE_DECLARE;
        if (PACKAGE_DECLARATION) then
            return (TRUE);
        else
            SYNTAX_ERROR("Generic formal part");
        end if; -- if package_declaration
    else
        return (FALSE);
    end if;
end GENERIC_FORMAL_PART;

```

```

-----
-- PROCEDURE_UNIT --> identifier [FORMAL_PART ?] is SUBPROGRAM_BODY
--                --> identifier [FORMAL_PART ?] ;
--                --> identifier [FORMAL_PART ?] renames NAME ;
function PROCEDURE_UNIT return boolean is
begin
put(RESULT_FILE, "In procedure unit "); new_line(RESULT_FILE);
DECLARATION := TRUE;
  HENRY_WRITE_ENABLE := TRUE;
if (BYPASS(TOKEN_IDENTIFIER)) then
  if PACKAGE_BODY_DECLARE then
    WRITE_HENRY_DATA(LOCAL_DECLARE, DUMMY_LEXEME,
      PROCEDURE_TYPE, NONE, LAST_RECORD);
  end if;
  SCOPE_LEVEL := SCOPE_LEVEL + 1;
  if (FORMAL_PART) then
    null;
  end if;
  -- if formal part statement
  if (BYPASS(TOKEN_IS)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PARAM_DECLARE,
      NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    WRITE_LINE_COUNT(LAST_RECORD.NOMEN, HENRY_LINE_COUNT,
      DUMMY9s, NEXT_LINE);
  if (SUBPROGRAM_BODY) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PROCEDURE_CALL,
      NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    WRITE_LINE_COUNT(DUMMY_LEXEME, DUMMY9s, HENRY_LINE_COUNT,
      NEXT_LINE);
    CREATE_LINE_COUNT_NODE(NEXT_LINE, LAST_LINE);
    SCOPE_LEVEL := SCOPE_LEVEL - 1;
    return (TRUE);
  else
    SYNTAX_ERROR("Procedure unit");
  end if;
  -- if subprogram body statement
elseif (BYPASS(TOKEN_SEMICOLON)) then
  SCOPE_LEVEL := SCOPE_LEVEL - 1;
  return (TRUE);
elseif (BYPASS(TOKEN_RENAMES)) then
  if (NAME) then
    if (BYPASS(TOKEN_SEMICOLON)) then
      SCOPE_LEVEL := SCOPE_LEVEL - 1;
      return (TRUE);
    else
      SYNTAX_ERROR("Procedure unit");
    end if;
    -- if bypass(token_semicolon)
  else
    SYNTAX_ERROR("Procedure unit");
  end if;
  -- if name statement

```

```

    end if;                                -- if bypass(token_is)
else
    return (FALSE);
end if;                                -- if bypass(token_identifier)
end PROCEDURE_UNIT;

```

```

-----
-- SUBPROGRAM_BODY --> new NAME [GENERIC_ACTUAL_PART ?] ;
--                --> separate ;
--                --> <> ;
--                --> [DECLARATIVE_PART ?] begin SEQUENCE OF STATEMENTS
--                [exception [EXCEPTION_HANDLER]+ ?] end [DESIGNATOR ?] ;
--                --> NAME ;

```

function SUBPROGRAM_BODY return boolean is

NAME_POINTER : POINTER;

begin

put(RESULT_FILE, "In subprogram_body "); new_line(RESULT_FILE);

NAME_POINTER := NEXT_HEN;

DECLARATION := TRUE;

if (BYPASS(TOKEN_NEW)) then

 HENRY_WRITE_ENABLE := FALSE;

 if (NAME) then

 if (GENERIC_ACTUAL_PART) then

 null;

 end if; -- if generic actual part

 if (BYPASS(TOKEN_SEMICOLON)) then

 return (TRUE);

 else

 SYNTAX_ERROR("Subprogram body");

 end if; -- if bypass(token_semicolon)

else

 SYNTAX_ERROR("Subprogram body");

end if; -- if name statement

elsif (BYPASS(TOKEN_SEPARATE)) then

 if (BYPASS(TOKEN_SEMICOLON)) then

 return (TRUE);

 else

 SYNTAX_ERROR("Subprogram body");

 end if; -- if bypass(token_semicolon)

elsif (BYPASS(TOKEN_BRACKETS)) then

 if (BYPASS(TOKEN_SEMICOLON)) then

 return (TRUE);

 else

 SYNTAX_ERROR("Subprogram body");

 end if; -- if bypass(token_semicolon)

elsif (DECLARATIVE_PART) then

 WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_DECLARATIONS,
 NONE, NEXT_HEN);

 CREATE_NODE(NEXT_HEN, LAST_RECORD);


```

if (BYPASS(TOKEN_BEGIN)) then
  DECLARATION := FALSE;
if (SEQUENCE_OF_STATEMENTS) then
  if (BYPASS(TOKEN_EXCEPTION)) then
    if (EXCEPTION_HANDLER) then
      while (EXCEPTION_HANDLER) loop
        null;
      end loop;
    else
      SYNTAX_ERROR("Subprogram body");
    end if;
    -- if exception_handler statement
  end if;
  -- if bypass(token_exception)
if (BYPASS(TOKEN_END)) then
  HENRY_WRITE_ENABLE := FALSE;
  if (DESIGNATOR) then
    null;
  end if;
  -- if designator statement
  if (BYPASS(TOKEN_SEMICOLON)) then
    DECLARATION := TRUE;
    return (TRUE);
  else
    SYNTAX_ERROR("Subprogram body");
  end if;
  -- if bypass(token_semicolon)
else
  SYNTAX_ERROR("Subprogram body");
end if;
  -- if bypass(token_end)
else
  SYNTAX_ERROR("Subprogram body");
end if;
  -- if sequence of statements
else
  SYNTAX_ERROR("Subprogram body");
end if;
  -- if bypass(token_begin)
elsif (BYPASS(TOKEN_BEGIN)) then
  DECLARATION := FALSE;
  WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_DECLARATIONS,
    NONE, NEXT_HEN);
  CREATE_NODE(NEXT_HEN, LAST_RECORD);
  if (SEQUENCE_OF_STATEMENTS) then
    if (BYPASS(TOKEN_EXCEPTION)) then
      if (EXCEPTION_HANDLER) then
        while (EXCEPTION_HANDLER) loop
          null;
        end loop;
      else
        SYNTAX_ERROR("Subprogram body");
      end if;
      -- if exception_handler statement
    end if;
    -- if bypass(token_exception)
  if (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
    if (DESIGNATOR) then
      null;
    end if;
    -- if designator statement

```

```

    if (BYPASS(TOKEN_SEMICOLON)) then
        DECLARATION := TRUE;
        return (TRUE);
    else
        SYNTAX_ERROR("Subprogram body");
    end if;
    -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Subprogram body");
end if;
    -- if bypass(token_end)
else
    SYNTAX_ERROR("Subprogram body");
end if;
    -- if sequence of statements
elsif (NAME) then
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Subprogram body");
    end if;
    -- if bypass(token_semicolon)
else
    return (FALSE);
end if;
    -- if bypass(token_new)
end SUBPROGRAM_BODY;

```

```

-- FUNCTION_UNIT --> DESIGNATOR FUNCTION_UNIT_TAIL
function FUNCTION_UNIT return boolean is
begin
    put(RESULT_FILE, "In function unit "); new_line(RESULT_FILE);
    DECLARATION := TRUE;
    HENRY_WRITE_ENABLE := TRUE;
    if (DESIGNATOR) then
        if PACKAGE_BODY_DECLARE then
            WRITE_HENRY_DATA(LOCAL_DECLARE, DUMMY_LEXEME, FUNCTION_TYPE,
                NONE, LAST_RECORD);
            WRITE_LINE_COUNT(LAST_RECORD.NOMEN, HENRY_LINE_COUNT,
                DUMMY9s, NEXT_LINE);
        end if;
        SCOPE_LEVEL := SCOPE_LEVEL + 1;
        if (FUNCTION_UNIT_TAIL) then

            SCOPE_LEVEL := SCOPE_LEVEL - 1;
            return (TRUE);
        else
            SYNTAX_ERROR("Function unit");
        end if;
    else
        return (FALSE);
    end if;
end FUNCTION_UNIT;

```

```

-- FUNCTION_UNIT_TAIL --> is new NAME [GENERIC_ACTUAL_PART ?] ;
--                                --> [FORMAL_PART ?] return NAME FUNCTION_BODY
function FUNCTION_UNIT_TAIL return boolean is
begin
put (RESULT_FILE, "In function unit tail "); new_line (RESULT_FILE);
if (BYPASS (TOKEN_IS)) then
    FUNCTION_PARAM_DECLARE := TRUE;
    if (BYPASS (TOKEN_NEW)) then
        if (NAME) then
            if (GENERIC_ACTUAL_PART) then
                null;
            end if;
            -- if generic actual part
            if (BYPASS (TOKEN_SEMICOLON)) then
                return (TRUE);
            else
                SYNTAX_ERROR ("Function unit tail");
            end if;
            -- if bypass(token_semicolon)
        else
            SYNTAX_ERROR ("Function unit tail");
        end if;
        -- if name statement
    else
        SYNTAX_ERROR ("Function unit tail");
    end if;
    -- if bypass(token_new)
elsif (FORMAL_PART) then
    FUNCTION_PARAM_DECLARE := FALSE;
    if (BYPASS (TOKEN_RETURN)) then
        if (NAME) then
            -- check for type_mark
            if (FUNCTION_BODY) then
                return (TRUE);
            else
                SYNTAX_ERROR ("Function unit tail");
            end if;
            -- if function body statement
        else
            SYNTAX_ERROR ("Function unit tail");
        end if;
        -- if type mark statement
    else
        SYNTAX_ERROR ("Function unit tail");
    end if;
    -- if bypass(token_return)
elsif (BYPASS (TOKEN_RETURN)) then
    if (NAME) then
        -- check for type_mark
        if (FUNCTION_BODY) then
            return (TRUE);
        else
            SYNTAX_ERROR ("Function unit tail");
        end if;
        -- if function body statement
    else
        SYNTAX_ERROR ("Function unit tail");
    end if;
    -- if type mark statement
else
    return (FALSE);
end if;
-- if bypass(token_is)
end FUNCTION_UNIT_TAIL;

```

```

-----
-- FUNCTION_BODY --> is [FUNCTION_BODY_TAIL ?]
--
function FUNCTION_BODY return boolean is
begin
put(RESULT_FILE, "In function body "); new_line(RESULT_FILE);
if (BYPASS(TOKEN IS)) then
WRITE HENRY_DATA(BLANK, DUMMY_LEXEME, END_PARAM_DECLARE, NONE, NEXT_HEN
CREATE_NODE(NEXT_HEN, LAST_RECORD);
if (FUNCTION_BODY_TAIL) then
WRITE_LINE_COUNT(DUMMY_LEXEME, DUMMY9s, HENRY_LINE_COUNT,
NEXT_LINE);
CREATE_LINE_COUNT_NODE(NEXT_LINE, LAST_LINE);
WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_FUNCTION_TYPE,
NONE, NEXT_HEN);
CREATE_NODE(NEXT_HEN, LAST_RECORD);
end if;
return (TRUE);
elsif (BYPASS(TOKEN_SEMICOLON)) then
return (TRUE);
else
return (FALSE);
end if;
end FUNCTION_BODY;

```

```

-----
-- FUNCTION_BODY_TAIL --> separate ;
--
--> <> ;
--
--> SUBPROGRAM_BODY
--
--> NAME ;
function FUNCTION_BODY_TAIL return boolean is
begin
put(RESULT_FILE, "In function body tail "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_SEPARATE)) then
if (BYPASS(TOKEN_SEMICOLON)) then
return (TRUE);
else
SYNTAX_ERROR("Function body tail");
end if;
-- if bypass(token_semicolon)
elsif (BYPASS(TOKEN_BRACKETS)) then
if (BYPASS(TOKEN_SEMICOLON)) then
return (TRUE);
else
SYNTAX_ERROR("Function body tail");
end if;
-- if bypass(token_semicolon)
elsif (SUBPROGRAM_BODY) then
return (TRUE);
elsif (NAME) then
if (BYPASS(TOKEN_SEMICOLON)) then
return (TRUE);

```

```

else
    SYNTAX_ERROR("Function body tail");
end if;
-- if bypass(token_semicolon)
else
    return (FALSE);
end if;
-- if bypass(token_separate)
end FUNCTION_BODY_TAIL;

```

```

-----

-- TASK_DECLARATION --> body TASK BODY ;
--
-- --> [type ?] identifier [is [ENTRY_DECLARATION]*
-- [REPRESENTATION_CLAUSE]* end [identifier ?] ?] ;
function TASK_DECLARATION return boolean is
begin
put(RESULT_FILE, "In task_declaration "); new_line(RESULT_FILE);
DECLARATION := TRUE;
if (BYPASS(TOKEN_TYPE)) then
    null;
end if;
-- if bypass(token_type)
if (BYPASS(TOKEN_BODY)) then
    if (TASK_BODY) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Task declaration");
        end if;
    else
        SYNTAX_ERROR("Task declaration");
    end if;
    -- if task_body statement
elsif (BYPASS(TOKEN_IDENTIFIER)) then
    SCOPE_LEVEL := SCOPE_LEVEL + 1;
    if (BYPASS(TOKEN_IS)) then
        while (ENTRY_DECLARATION) loop
            null;
        end loop;
        while (REPRESENTATION_CLAUSE) loop
            null;
        end loop;
        if (BYPASS(TOKEN_END)) then
            if (BYPASS(TOKEN_IDENTIFIER)) then
                null;
            end if;
            -- if bypass(token_identifier)
            if (BYPASS(TOKEN_SEMICOLON)) then
                SCOPE_LEVEL := SCOPE_LEVEL - 1;
                return (TRUE);
            else
                SYNTAX_ERROR("Task declaration");
            end if;
            -- if bypass(token_semicolon)
        else
            SYNTAX_ERROR("Task declaration");
        end if;
        -- if bypass(token_end)
    end if;

```

```

elseif (BYPASS(TOKEN_SEMICOLON)) then
    SCOPE_LEVEL := SCOPE_LEVEL - 1;
    return (TRUE);
else
    SYNTAX_ERROR("Task declaration");
end if;
-- if bypass(token_is)
else
    return (FALSE);
end if;
-- if bypass(token_body)
end TASK_DECLARATION;

```

```

-----

-- TASK_BODY --> identifier is TASK_BODY_TAIL
function TASK_BODY return boolean is
begin
put(RESULT_FILE, "In task_body "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_IDENTIFIER)) then
    SCOPE_LEVEL := SCOPE_LEVEL + 1;
    if (BYPASS(TOKEN_IS)) then
        if (TASK_BODY_TAIL) then
            SCOPE_LEVEL := SCOPE_LEVEL - 1;
            return (TRUE);
        else
            SYNTAX_ERROR("Task body");
        end if;
        -- if task_body_tail statement
    else
        SYNTAX_ERROR("Task body");
    end if;
    -- if bypass(token_is)
else
    return (FALSE);
end if;
-- if bypass(token_identifier)
end TASK_BODY;

```

```

-----

-- TASK_BODY_TAIL --> separate
-- --> [DECLARATIVE PART ?] begin SEQUENCE OF STATEMENTS
-- [exception [EXCEPTION_HANDLER + ?] end [identifier ?]
function TASK_BODY_TAIL return boolean is
begin
put(RESULT_FILE, "In task_body_tail "); new_line(RESULT_FILE);
DECLARATION := TRUE;
if (BYPASS(TOKEN_SEPARATE)) then
    return (TRUE);
elseif (DECLARATIVE_PART) then
    if (BYPASS(TOKEN_BEGIN)) then
        DECLARATION := FALSE;
        if (SEQUENCE_OF_STATEMENTS) then
            if (BYPASS(TOKEN_EXCEPTION)) then
                if (EXCEPTION_HANDLER) then
                    while (EXCEPTION_HANDLER) loop

```



```

        null;
    end loop;
else
    SYNTAX_ERROR("Task body tail");
end if;
-- if exception_handler statement
end if;
-- if bypass(token_exception)
if (BYPASS(TOKEN_END)) then
    if (BYPASS(TOKEN_IDENTIFIER)) then
        null;
    end if;
    -- if bypass(token_identifier)
    DECLARATION := TRUE;
    return (TRUE);
else
    SYNTAX_ERROR("Task body tail");
end if;
-- if bypass(token_end)
else
    SYNTAX_ERROR("Task body tail");
end if;
-- if sequence_of_statements
else
    SYNTAX_ERROR("Task body tail");
end if;
-- if bypass(token_begin)
elsif (BYPASS(TOKEN_BEGIN)) then
    DECLARATION := FALSE;
    if (SEQUENCE_OF_STATEMENTS) then
        if (BYPASS(TOKEN_EXCEPTION)) then
            if (EXCEPTION_HANDLER) then
                while (EXCEPTION_HANDLER) loop
                    null;
                end loop;
            else
                SYNTAX_ERROR("Task body tail");
            end if;
            -- if exception_handler statement
        end if;
        -- if bypass(token_exception)
    end if;
    if (BYPASS(TOKEN_END)) then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            null;
        end if;
        -- if bypass(token_identifier)
        DECLARATION := TRUE;
        return (TRUE);
    else
        SYNTAX_ERROR("Task body tail");
    end if;
    -- if bypass(token_end)
else
    SYNTAX_ERROR("Task body tail");
end if;
-- if sequence_of_statements
else
    return (FALSE);
end if;
-- if bypass(token_separate)
end TASK_BODY_TAIL;

```

```

-- PACKAGE_DECLARATION --> body PACKAGE_BODY
--
--> identifier PACKAGE_UNIT
function PACKAGE_DECLARATION return boolean is
begin
put(RESULT_FILE, "In package_declaration "); new_line(RESULT_FILE);
DECLARATION := TRUE;
HENRY_WRITE_ENABLE := TRUE;
if (BYPASS(TOKEN_BODY)) then
PACKAGE_BODY_DECLARE := TRUE;
HENRY_WRITE_ENABLE := FALSE;
if (PACKAGE_BODY) then
return (TRUE);
else
SYNTAX_ERROR("Package declaration");
end if;
-- if package_unit statement
elsif (BYPASS(TOKEN_IDENTIFIER)) then
WRITE_HENRY_DATA(LOCAL_DECLARE, DUMMY_LEXEME, PACKAGE_TYPE,
NONE, LAST_RECORD);
SCOPE_LEVEL := SCOPE_LEVEL + 1;
if (PACKAGE_UNIT) then
SCOPE_LEVEL := SCOPE_LEVEL - 1;
return (TRUE);
else
SYNTAX_ERROR("Package declaration");
end if;
-- if package_unit_tail statement
else
return (FALSE);
end if;
-- if bypass(token_package)
end PACKAGE_DECLARATION;

```

```

-- PACKAGE_BODY --> identifier is PACKAGE_BODY_TAIL
function PACKAGE_BODY return boolean is
begin
put(RESULT_FILE, "In package_body "); new_line(RESULT_FILE);

if (BYPASS(TOKEN_IDENTIFIER)) then
SCOPE_LEVEL := SCOPE_LEVEL + 1;
if (BYPASS(TOKEN_IS)) then
if (PACKAGE_BODY_TAIL) then
WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PACKAGE_TYPE,
NONE, NEXT_HEN);
SCOPE_LEVEL := SCOPE_LEVEL - 1;
return (TRUE);
else
SYNTAX_ERROR("Package body");
end if;
-- if package_body_tail statement
else
SYNTAX_ERROR("Package body");
end if;
-- if bypass(token_is)
else

```

```

    return (FALSE);
end if; -- if bypass(token_identifier)
end PACKAGE_BODY;

```

```

-----

-- PACKAGE_BODY_TAIL --> separate ;
-- --> [DECLARATIVE_PART ?] [begin SEQUENCE_OF_STATEMENTS
-- [exception [EXCEPTION_HANDLER]+ ?] ?]
-- end identifier ? ;
function PACKAGE_BODY_TAIL return boolean is
begin
put(RESULT_FILE, "In package_body_tail "); new_line(RESULT_FILE);
DECLARATION := TRUE;
if (BYPASS(TOKEN_SEPARATE)) then
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Package body tail");
    end if; -- if bypass(token_semicolon)
elsif (DECLARATIVE_PART) then
    DECLARATION := FALSE;
    if (BYPASS(TOKEN_BEGIN)) then
        if (SEQUENCE_OF_STATEMENTS) then
            if (BYPASS(TOKEN_EXCEPTION)) then
                if (EXCEPTION_HANDLER) then
                    while (EXCEPTION_HANDLER) loop
                        null;
                    end loop;
                else
                    SYNTAX_ERROR("Package body tail");
                end if; -- if exception_handler statement
            end if; -- if bypass(token_exception)
        if (BYPASS(TOKEN_END)) then
            HENRY_WRITE_ENABLE := FALSE;
            if (BYPASS(TOKEN_IDENTIFIER)) then
                null;
            end if; -- if bypass(token_identifier)
        if (BYPASS(TOKEN_SEMICOLON)) then
            DECLARATION := TRUE;
            return (TRUE);
        else
            SYNTAX_ERROR("Package body tail");
        end if; -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Package body tail");
    end if; -- if bypass(token_end)
else
    SYNTAX_ERROR("Package body tail");
end if; -- if sequence_of_statements
elsif (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;

```

```

if (BYPASS(TOKEN_IDENTIFIER)) then
    null;
end if;
-- if bypass(token_identifier)
if (BYPASS(TOKEN_SEMICOLON)) then
    DECLARATION := TRUE;
    return (TRUE);
else
    SYNTAX_ERROR("Package body tail");
end if;
-- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Package body tail");
end if;
-- if bypass(token_begin)
elsif (BYPASS(TOKEN_BEGIN)) then
    DECLARATION := FALSE;
if (SEQUENCE_OF_STATEMENTS) then
    if (BYPASS(TOKEN_EXCEPTION)) then
        if (EXCEPTION_HANDLER) then
            while (EXCEPTION_HANDLER) loop
                null;
            end loop;
        else
            SYNTAX_ERROR("Package body tail");
        end if;
        -- if exception_handler statement
    end if;
    -- if bypass(token_exception)
if (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
    if (BYPASS(TOKEN_IDENTIFIER)) then
        null;
    end if;
    -- if bypass(token_identifier)
    if (BYPASS(TOKEN_SEMICOLON)) then
        DECLARATION := TRUE;
        return (TRUE);
    else
        SYNTAX_ERROR("Package body tail");
    end if;
    -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Package body tail");
end if;
-- if bypass(token_end)
else
    SYNTAX_ERROR("Package body tail");
end if;
-- if sequence_of_statements
elsif (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
    if (BYPASS(TOKEN_IDENTIFIER)) then
        null;
    end if;
    -- if bypass(token_identifier)
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Package body tail");
    end if;
    -- if bypass(token_semicolon)
else

```

```

    return (FALSE);
end if;
-- if bypass(token_separate)
end PACKAGE_BODY_TAIL;

-----

-- PACKAGE_UNIT --> is PACKAGE_TAIL_END
-- --> renames NAME ;
function PACKAGE_UNIT return boolean is
begin
    put(RESULT_FILE, "In package_unit "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_IS)) then
        if (PACKAGE_TAIL_END) then
            return (TRUE);
        else
            SYNTAX_ERROR("Package unit");
        end if;
    elsif (BYPASS(TOKEN_RENAMES)) then
        if (NAME) then
            if (BYPASS(TOKEN_SEMICOLON)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Package unit");
            end if;
            -- if bypass(token_semicolon)
        else
            SYNTAX_ERROR("Package unit");
        end if;
        -- if name statement
    else
        return (FALSE);
    end if;
    -- if bypass(token_is)
end PACKAGE_UNIT;

-----

```

```

-- PACKAGE_TAIL_END --> new NAME [GENERIC_ACTUAL_PART ?] ;
-- --> [BASIC_DECLARATIVE_ITEM]* [private
-- [BASIC_DECLARATIVE_ITEM]* ?] end [identifier ?] ;
function PACKAGE_TAIL_END return boolean is
begin
    put(RESULT_FILE, "In package_tail_end "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_NEW)) then
        if (NAME) then
            if (GENERIC_ACTUAL_PART) then
                null;
            end if;
            -- if generic_actual_part statement
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Package tail end");
        end if;
        -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Package tail end");
    end if;
end PACKAGE_TAIL_END;

```

```

end if;                                -- if name statement
elsif (BASIC_DECLARATIVE_ITEM) then
while (BASIC_DECLARATIVE_ITEM) loop
    null;
end loop;
if (BYPASS(TOKEN_PRIVATE)) then
while (BASIC_DECLARATIVE_ITEM) loop
    null;
end loop;
end if;                                -- if bypass(token_private)
if (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
if (BYPASS(TOKEN_IDENTIFIER)) then
    null;
end if;
if (BYPASS(TOKEN_SEMICOLON)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PACKAGE_DECLARE,
        NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    return (TRUE);
else
    SYNTAX_ERROR("Package tail end");
end if;                                -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Package tail end");
end if;                                -- if bypass(token_end)
elsif (BYPASS(TOKEN_PRIVATE)) then
while (BASIC_DECLARATIVE_ITEM) loop
    null;
end loop;
if (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
if (BYPASS(TOKEN_IDENTIFIER)) then
    null;
end if;
if (BYPASS(TOKEN_SEMICOLON)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PACKAGE_DECLARE,
        NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    return (TRUE);
else
    SYNTAX_ERROR("Package tail end");
end if;                                -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Package tail end");
end if;                                -- if bypass(token_end)
elsif (BYPASS(TOKEN_END)) then
    HENRY_WRITE_ENABLE := FALSE;
if (BYPASS(TOKEN_IDENTIFIER)) then
    null;
end if;
if (BYPASS(TOKEN_SEMICOLON)) then

```



```

WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PACKAGE_DECLARE,
    NONE, NEXT_HEN);
CREATE_NODE(NEXT_HEN, LAST_RECORD);
return (TRUE);
else
    SYNTAX_ERROR("Package tail end");
end if;
-- if bypass(token_semicolon)
else
    return (FALSE);
end if;
-- if bypass(token_new)
end PACKAGE_TAIL_END;

```

```

-----
-- BASIC_DECLARATIVE_ITEM --> BASIC_DECLARATIVE
--                               --> REPRESENTATION_CLAUSE
--                               --> use WITH_OR_USE_CLAUSE
function BASIC_DECLARATIVE_ITEM return boolean is
begin
    put(RESULT_FILE, "In basic_declarative_item "); new_line(RESULT_FILE);
    HENRY_WRITE_ENABLE := TRUE;
    if (BASIC_DECLARATION) then
        HENRY_WRITE_ENABLE := FALSE;
        return (TRUE);
    elsif (REPRESENTATION_CLAUSE) then
        return (TRUE);
    elsif (BYPASS(TOKEN_USE)) then
        if (WITH_OR_USE_CLAUSE) then
            return (TRUE);
        else
            SYNTAX_ERROR("Basic declarative item");
        end if;
    else
        return (FALSE);
    end if;
end BASIC_DECLARATIVE_ITEM;

```

```

-----
-- DECLARATIVE_PART --> [BASIC_DECLARATIVE_ITEM]* [LATER_DECLARATIVE_ITEM]
function DECLARATIVE_PART return boolean is
begin
    put(RESULT_FILE, "In declarative_part "); new_line(RESULT_FILE);
    while (BASIC_DECLARATIVE_ITEM) loop
        null;
    end loop;
    while (LATER_DECLARATIVE_ITEM) loop
        null;
    end loop;
    return (TRUE);
end DECLARATIVE_PART;

```

```

-----
-- BASIC_DECLARATION --> type TYPE_DECLARATION
--                   --> subtype SUBTYPE_DECLARATION
--                   --> procedure PROCEDURE_UNIT
--                   --> function FUNCTION_UNIT
--                   --> package PACKAGE_DECLARATION
--                   --> generic GENERIC_DECLARATION
--                   --> IDENTIFIER_DECLARATION
--                   --> task TASK_DECLARATION
function BASIC_DECLARATION return boolean is
begin
put(RESULT_FILE, "In basic declaration "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_TYPE)) then
  if (TYPE_DECLARATION) then
    return (TRUE);
  else
    SYNTAX_ERROR("Basic declaration");
  end if;
elsif (BYPASS(TOKEN_SUBTYPE)) then
  if (SUBTYPE_DECLARATION) then
    return (TRUE);
  else
    SYNTAX_ERROR("Basic declaration");
  end if;
elsif (BYPASS(TOKEN_PROCEDURE)) then
  DECLARE_TYPE := PROCEDURE_DECLARE;
  if (PROCEDURE_UNIT) then
    HENRY_WRITE_ENABLE := FALSE;
    return (TRUE);
  else
    SYNTAX_ERROR("Basic declaration");
  end if;
  -- if procedure_unit statement
elsif (BYPASS(TOKEN_FUNCTION)) then
  DECLARE_TYPE := FUNCTION_DECLARE;
  if (FUNCTION_UNIT) then
    HENRY_WRITE_ENABLE := FALSE;
    return (TRUE);
  else
    SYNTAX_ERROR("Basic declaration");
  end if;
  -- if function_unit statement
elsif (BYPASS(TOKEN_PACKAGE)) then
  DECLARE_TYPE := PACKAGE_DECLARE;
  if (PACKAGE_DECLARATION) then
    return (TRUE);
  else
    SYNTAX_ERROR("Basic declaration");
  end if;
  -- if package_declaration
elsif (BYPASS(TOKEN_GENERIC)) then
  if (GENERIC_DECLARATION) then
    return (TRUE);
  else

```

```

        SYNTAX_ERROR("Basic declaration");
    end if;                                -- if generic_declaration
elsif (IDENTIFIER_DECLARATION) then
    HENRY_WRITE_ENABLE := FALSE;
    return (TRUE);
elsif (BYPASS(TOKEN_TASK)) then
    DECLARE_TYPE := TASK_DECLARE;
    if (TASK_DECLARATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Basic declaration");
    end if;
else
    return (FALSE);
end if;
end BASIC_DECLARATION;

```

```

-----

-- LATER_DECLARATIVE_ITEM --> PROPER_BODY
--                               --> generic GENERIC_DECLARATION
--                               --> use WITH_OR_USE_CLAUSE
function LATER_DECLARATIVE_ITEM return boolean is
begin
    put(RESULT_FILE, "In later_declarative_item "); new_line(RESULT_FILE);
    if (PROPER_BODY) then                    -- check for body_declaration
        return (TRUE);
    elsif (BYPASS(TOKEN_GENERIC)) then
        if (GENERIC_DECLARATION) then
            return (TRUE);
        else
            SYNTAX_ERROR("Later declarative item");
        end if;                                -- if generic_declaration
    elsif (BYPASS(TOKEN_USE)) then
        if (WITH_OR_USE_CLAUSE) then
            return (TRUE);
        else
            SYNTAX_ERROR("Later declarative item");
        end if;                                -- if with_or_use_clause
    else
        return (FALSE);
    end if;
end LATER_DECLARATIVE_ITEM;

```

```

-----

-- PROPER_BODY --> procedure PROCEDURE_UNIT
--               --> function FUNCTION_UNIT
--               --> package PACKAGE_DECLARATION
--               --> task TASK_DECLARATION
function PROPER_BODY return boolean is
begin

```

```

put(RESULT_FILE, "In proper_body "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_PROCEDURE)) then
  DECLARE_TYPE := PROCEDURE_DECLARE;
  if (PROCEDURE_UNIT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Proper body");
  end if;
  -- if procedure_unit statement
elsif (BYPASS(TOKEN_FUNCTION)) then
  DECLARE_TYPE := FUNCTION_DECLARE;
  if (FUNCTION_UNIT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Proper body");
  end if;
  -- if function_unit statement
elsif (BYPASS(TOKEN_PACKAGE)) then
  DECLARE_TYPE := PACKAGE_DECLARE;
  if (PACKAGE_DECLARATION) then
    return (TRUE);
  else
    SYNTAX_ERROR("Proper body");
  end if;
  -- if package_declaration
elsif (BYPASS(TOKEN_TASK)) then
  DECLARE_TYPE := TASK_DECLARE;
  if (TASK_DECLARATION) then
    return (TRUE);
  else
    SYNTAX_ERROR("Proper body");
  end if;
else
  return (FALSE);
end if;
-- if bypass(token_procedure)
end PROPER_BODY;

```

```

-- SEQUENCE OF STATEMENTS --> [STATEMENT]+
function SEQUENCE_OF_STATEMENTS return boolean is
begin
  put(RESULT_FILE, "In sequence_of_statements "); new_line(RESULT_FILE);
  if (STATEMENT) then
    while (STATEMENT) loop
      null;
    end loop;
    return (TRUE);
  else
    return (FALSE);
  end if;
end SEQUENCE_OF_STATEMENTS;

```

```

-- STATEMENT --> [LABEL ?] SIMPLE_STATEMENT
--               --> [LABEL ?] COMPOUND_STATEMENT
function STATEMENT return boolean is
begin
put(RESULT_FILE, "In statement "); new_line(RESULT_FILE);
if (LABEL) then
    null;
end if;
if (SIMPLE_STATEMENT) then
    return (TRUE);
elsif (COMPOUND_STATEMENT) then
    return (TRUE);
else
    return (FALSE);
end if;
end STATEMENT;

```

```

-----
-- COMPOUND_STATEMENT --> if IF_STATEMENT
--                       --> case CASE_STATEMENT
--                       --> LOOP_STATEMENT
--                       --> BLOCK_STATEMENT
--                       --> accept ACCEPT_STATEMENT
--                       --> select SELECT_STATEMENT
function COMPOUND_STATEMENT return boolean is
begin
put(RESULT_FILE, "In compound_statement "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_IF)) then
    NESTING_METRIC(IF_CONSTRUCT);
    if (IF_STATEMENT) then
        return (TRUE);
    else
        SYNTAX_ERROR("Compound statement");
    end if;
    -- if if_statement
elsif (BYPASS(TOKEN_CASE)) then
    NESTING_METRIC(CASE_CONSTRUCT);
    if (CASE_STATEMENT) then
        return (TRUE);
    else
        SYNTAX_ERROR("Compound statement");
    end if;
    -- if case_statement
elsif (LOOP_STATEMENT) then
    return (TRUE);
elsif (BLOCK_STATEMENT) then
    return (TRUE);
elsif (BYPASS(TOKEN_ACCEPT)) then
    if (ACCEPT_STATEMENT) then
        return (TRUE);
    else
        SYNTAX_ERROR("Compound statement");
    end if;

```

```

elsif (BYPASS(TOKEN_SELECT)) then
  if (SELECT_STATEMENT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Compound statement");
  end if;
else
  return (FALSE);
end if;
end COMPOUND_STATEMENT;

```

```

-----

-- BLOCK_STATEMENT --> [identifier : ?] [declare DECLARATIVE_PART ?]
--                               begin SEQUENCE_OF_STATEMENTS [exception
--                               [EXCEPTION_HANDLER]+ ?] ?] end [identifier ?] ;
function BLOCK_STATEMENT return boolean is
  DECLARE_STATUS : boolean;
begin
  put (RESULT_FILE, "In block_statement "); new_line (RESULT_FILE);
  if (DECLARATION) then
    DECLARE_STATUS := TRUE;
  else
    DECLARATION := TRUE;
    DECLARE_STATUS := FALSE;
  end if;
  DECLARE_TYPE := BLOCK_DECLARE;
  if (BYPASS(TOKEN_IDENTIFIER)) then
    SCOPE_LEVEL := SCOPE_LEVEL + 1;
    if (BYPASS(TOKEN_COLON)) then
      SCOPE_LEVEL := SCOPE_LEVEL - 1;
    else
      SYNTAX_ERROR("Block statement");
    end if;
    -- if bypass(token_colon)
  else
    DECLARE_TYPE := VARIABLE_DECLARE;
  end if;
  -- if bypass(token_identifier)
  if (BYPASS(TOKEN_DECLARE)) then
    SCOPE_LEVEL := SCOPE_LEVEL + 1;
    if (DECLARATIVE_PART) then
      null;
    else
      SYNTAX_ERROR("Block statement");
    end if;
    -- if declarative_part statement
  end if;
  -- if bypass(token_declare)
  if (BYPASS(TOKEN_BEGIN)) then
    DECLARATION := FALSE;
    if (SEQUENCE_OF_STATEMENTS) then
      if (BYPASS(TOKEN_EXCEPTION)) then
        if (EXCEPTION_HANDLER) then
          while (EXCEPTION_HANDLER) loop
            null;

```



```

        end loop;
    else
        SYNTAX_ERROR("Block statement");
    end if;
    end if; -- if exception_handler statement
end if; -- if bypass(token_exception)
if (BYPASS(TOKEN_END)) then
    if (BYPASS(TOKEN_IDENTIFIER)) then
        null;
    end if; -- if bypass(token_identifier)
    if (BYPASS(TOKEN_SEMICOLON)) then
        SCOPE_LEVEL := SCOPE_LEVEL - 1;
        DECLARATION := TRUE;
        return (TRUE);
    else
        SYNTAX_ERROR("Block statement");
    end if; -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Block statement");
end if; -- if bypass(token_end)
else
    SYNTAX_ERROR("Block statement");
end if; -- if sequence_of_statements
else
    if not (DECLARE_STATUS) then
        DECLARATION := FALSE;
    end if;
    return (FALSE);
end if; -- if bypass(token_begin)
end BLOCK_STATEMENT;

```

```

-- IF_STATEMENT --> EXPRESSION then SEQUENCE_OF_STATEMENTS
-- [elsif EXPRESSION then SEQUENCE_OF_STATEMENTS]*
-- [else SEQUENCE_OF_STATEMENTS ?] end if ;
function IF_STATEMENT return boolean is
begin
    put(RESULT_FILE, "In if_statement "); new_line(RESULT_FILE);
    if (EXPRESSION) then
        if (BYPASS(TOKEN_THEN)) then
            if (SEQUENCE_OF_STATEMENTS) then
                while (BYPASS(TOKEN_ELSIF)) loop
                    if (EXPRESSION) then
                        if (BYPASS(TOKEN_THEN)) then
                            if not (SEQUENCE_OF_STATEMENTS) then
                                SYNTAX_ERROR("If statement");
                            end if; -- if not sequence_of_statements
                        else
                            SYNTAX_ERROR("If statement");
                        end if; -- if bypass(token_then)
                    else
                        SYNTAX_ERROR("If statement");
                    end if;
                end loop;
            end if;
        end if;
    end if;
end IF_STATEMENT;

```

```

    end if;                                -- if expression statement
end loop;
if (BYPASS(TOKEN_ELSE)) then
    if (SEQUENCE_OF_STATEMENTS) then
        null;
    else
        SYNTAX_ERROR("If statement");
    end if;                                -- if sequence_of_statements
end if;                                    -- if bypass(token_else)
if (BYPASS(TOKEN_END)) then
    if (BYPASS(TOKEN_IF)) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            NESTING_METRIC(IF_END);
            return (TRUE);
        else
            SYNTAX_ERROR("If statement");
        end if;                            -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("If statement");
    end if;                                -- if bypass(token_if)
else
    SYNTAX_ERROR("If statement");
end if;                                    -- if bypass(token_end)
else
    SYNTAX_ERROR("If statement");
end if;                                    -- if sequence_of_statements
else
    SYNTAX_ERROR("If statement");
end if;                                    -- if bypass(token_then)
else
    return (FALSE);
end if;                                    -- if expression statement
end IF_STATEMENT;

```

```

-- CASE STATEMENT --> EXPRESSION is [CASE_STATEMENT_ALTERNATIVE]+ end case ;
function CASE_STATEMENT return boolean is
begin
    put(RESULT_FILE, "In case statement "); new_line(RESULT_FILE);
    if (EXPRESSION) then
        if (BYPASS(TOKEN_IS)) then
            if (CASE_STATEMENT_ALTERNATIVE) then
                while (CASE_STATEMENT_ALTERNATIVE) loop
                    null;
                end loop;
            if (BYPASS(TOKEN_END)) then
                if (BYPASS(TOKEN_CASE)) then
                    if (BYPASS(TOKEN_SEMICOLON)) then
                        NESTING_METRIC(CASE_END);
                        return (TRUE);
                    else

```

```

        SYNTAX_ERROR("Case statement");
    end if;
    -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Case statement");
    end if;
    -- if bypass(token_case)
else
    SYNTAX_ERROR("Case statement");
    end if;
    -- if bypass(token_end)
else
    SYNTAX_ERROR("Case statement");
    end if;
    -- if case_statement_alternative
else
    SYNTAX_ERROR("Case statement");
    end if;
    -- if bypass(token_is)
else
    return (FALSE);
end if;
    -- if expression statement
end CASE_STATEMENT;

```

```

-- CASE_STATEMENT_ALTERNATIVE --> when CHOICE [| CHOICE]* ==>
--                               SEQUENCE_OF_STATEMENTS
function CASE_STATEMENT_ALTERNATIVE return boolean is
begin
    put(RESULT_FILE, "In case_statement_alternative "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_WHEN)) then
        if (CHOICE) then
            while (BYPASS(TOKEN_BAR)) loop
                if not (CHOICE) then
                    SYNTAX_ERROR("Case statement alternative");
                end if;
                -- if not choice statement
            end loop;
            if (BYPASS(TOKEN_ARROW)) then
                if (SEQUENCE_OF_STATEMENTS) then
                    return (TRUE);
                else
                    SYNTAX_ERROR("Case statement alternative");
                end if;
                -- if sequence_of_statements
            else
                SYNTAX_ERROR("Case statement alternative");
            end if;
            -- if bypass(token_arrow)
        else
            SYNTAX_ERROR("Case statement alternative");
        end if;
        -- if choice statement
    else
        return (FALSE);
    end if;
    -- if bypass(token_when)
end CASE_STATEMENT_ALTERNATIVE;

```

```

-- LOOP_STATEMENT --> [identifier : ?] [ITERATION_SCHEME ?] loop
--
--                               SEQUENCE_OF_STATEMENTS end loop [identifier ?] ;
function LOOP_STATEMENT return boolean is
begin
put(RESULT_FILE, "In loop_statement "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_IDENTIFIER)) then
  if (BYPASS(TOKEN_COLON)) then
    null;
  else
    SYNTAX_ERROR("Loop statement");
  end if;
end if;
-- if bypass(token_colon)
-- if bypass(token_identifier)
if (ITERATION_SCHEME) then
  NO_ITERATION := FALSE;
end if;
-- if iteration_scheme statement
if (BYPASS(TOKEN_LOOP)) then
  if (NO_ITERATION) then
    NESTING_METRIC(LOOP_CONSTRUCT);
  else
    NO_ITERATION := TRUE;
  end if;
if (SEQUENCE_OF_STATEMENTS) then
  if (BYPASS(TOKEN_END)) then
    if (BYPASS(TOKEN_LOOP)) then
      if (BYPASS(TOKEN_IDENTIFIER)) then
        null;
      end if;
      -- if bypass(token_identifier)
      if (BYPASS(TOKEN_SEMICOLON)) then
        NESTING_METRIC(LOOP_END);
        return (TRUE);
      else
        SYNTAX_ERROR("Loop statement");
      end if;
      -- if bypass(token_semicolon)
    else
      SYNTAX_ERROR("Loop statement");
    end if;
      -- if bypass(token_loop)
    else
      SYNTAX_ERROR("Loop statement");
    end if;
      -- if bypass(token_end)
    else
      SYNTAX_ERROR("Loop statement");
    end if;
      -- if sequence_of_statements
  else
    return (FALSE);
  end if;
  -- if bypass(token_loop)
end LOOP_STATEMENT;

```

```

-- EXCEPTION_HANDLER --> when EXCEPTION_CHOICE || EXCEPTION_CHOICE|* =>
--                               SEQUENCE_OF_STATEMENTS
function EXCEPTION_HANDLER return boolean is

```

```

begin
put(RESULT_FILE, "In exception handler "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_WHEN)) then
  if (EXCEPTION_CHOICE) then
    while (BYPASS(TOKEN_BAR)) loop
      if not (EXCEPTION_CHOICE) then
        SYNTAX_ERROR("Exception handler");
      end if;
    end loop;
  if (BYPASS(TOKEN_ARROW)) then
    if (SEQUENCE_OF_STATEMENTS) then
      return (TRUE);
    else
      SYNTAX_ERROR("Exception handler");
    end if;
  else
    SYNTAX_ERROR("Exception handler");
  end if;
else
  SYNTAX_ERROR("Exception handler");
end if;
return (FALSE);
end if;
end EXCEPTION_HANDLER;

```

```

-----
-- ACCEPT_STATEMENT --> identifier [(EXPRESSION) ?] [FORMAL_PART ?]
--                               [do SEQUENCE_OF_STATEMENTS end [identifier ?] ?] ;
function ACCEPT_STATEMENT return boolean is
begin
put(RESULT_FILE, "In accept statement "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_IDENTIFIER)) then
  if (BYPASS(TOKEN_LEFT_PAREN)) then
    if (EXPRESSION) then
      if (BYPASS(TOKEN_RIGHT_PAREN)) then
        null;
      else
        SYNTAX_ERROR("Accept statement");
      end if;
    else
      SYNTAX_ERROR("Accept statement");
    end if;
  end if;
  if (FORMAL_PART) then
    null;
  end if;
  if (BYPASS(TOKEN_DO)) then
    if (SEQUENCE_OF_STATEMENTS) then
      if (BYPASS(TOKEN_END)) then
        if (BYPASS(TOKEN_IDENTIFIER)) then

```

```

        null;
    end if;                -- if bypass(token_identifier)
else
    SYNTAX_ERROR("Accept statement");
end if;                -- if bypass(token_end)
else
    SYNTAX_ERROR("Accept statement");
end if;                -- if sequence_of_statements
end if;                -- if bypass(token_do)
if (BYPASS(TOKEN_SEMICOLON)) then
    return (TRUE);
else
    SYNTAX_ERROR("Accept statement");
end if;                -- if bypass(token_semicolon)
else
    return (FALSE);
end if;                -- if bypass(token_identifier)
end ACCEPT_STATEMENT;

```

```

-----

-- SELECT_STATEMENT --> SELECT_STATEMENT_TAIL SELECT_ENTRY_CALL end select ;
function SELECT_STATEMENT return boolean is
begin
    put(RESULT_FILE, "In select_statement "); new_line(RESULT_FILE);
    if (SELECT_STATEMENT_TAIL) then
        if (SELECT_ENTRY_CALL) then
            if (BYPASS(TOKEN_END)) then
                if (BYPASS(TOKEN_SELECT)) then
                    if (BYPASS(TOKEN_SEMICOLON)) then
                        return (TRUE);
                    else
                        SYNTAX_ERROR("Select statement");
                    end if;                -- if bypass(token_semicolon)
                else
                    SYNTAX_ERROR("Select statement");
                end if;                -- if bypass(token_select)
            else
                SYNTAX_ERROR("Select statement");
            end if;                -- if bypass(token_end)
        else
            SYNTAX_ERROR("Select statement");
        end if;                -- if select_entry_call statement
    else
        return (FALSE);
    end if;                -- if select_statement_tail
end SELECT_STATEMENT;

```

```

-----

-- SELECT_STATEMENT_TAIL --> SELECT_ALTERNATIVE [or SELECT_ALTERNATIVE]*
--                                --> NAME ; [SEQUENCE_OF_STATEMENTS ?]

```



```

function SELECT_STATEMENT_TAIL return boolean is
begin
put(RESULT_FILE, "In select_statement_tail "); new_line(RESULT_FILE);
if (SELECT_ALTERNATIVE) then
    while (BYPASS(TOKEN_OR)) loop
        if not (SELECT_ALTERNATIVE) then
            SYNTAX_ERROR("Select statement tail");
        end if;
    end loop;
    return (TRUE);
elsif (NAME) then -- check for entry call statement
    if (BYPASS(TOKEN_SEMICOLON)) then
        if (SEQUENCE_OF_STATEMENTS) then
            null;
        end if; -- if sequence_of_statements
        return (TRUE);
    else
        SYNTAX_ERROR("Select statement tail");
    end if; -- if bypass(token_semicolon)
else
    return (FALSE);
end if; -- if select_alternative statement
end SELECT_STATEMENT_TAIL;

```

```

-----
-- SELECT_ALTERNATIVE --> [when EXPRESSION => ?] accept ACCEPT_STATEMENT
--                               [SEQUENCE_OF_STATEMENTS ?]
--                               --> [when EXPRESSION => ?] delay DELAY_STATEMENT
--                               [SEQUENCE_OF_STATEMENTS ?]
--                               --> [when EXPRESSION => ?] terminate ;
function SELECT_ALTERNATIVE return boolean is
begin
put(RESULT_FILE, "In select_alternative "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_WHEN)) then
    if (EXPRESSION) then
        if (BYPASS(TOKEN_ARROW)) then
            null;
        else
            SYNTAX_ERROR("Select alternative");
        end if; -- if bypass(token_arrow)
    else
        SYNTAX_ERROR("Select alternative");
    end if; -- if expression statement
end if; -- if bypass(token_when)
if (BYPASS(TOKEN_ACCEPT)) then
    if (ACCEPT_STATEMENT) then
        if (SEQUENCE_OF_STATEMENTS) then
            null;
        end if; -- if sequence_of_statements
        return (TRUE);
    else

```

```

        SYNTAX_ERROR("Select alternative");
    end if;                                -- if accept_statement
elsif (BYPASS(TOKEN_DELAY)) then
    if (DELAY_STATEMENT) then
        if (SEQUENCE_OF_STATEMENTS) then
            null;
        end if;                            -- if sequence_of_statements
        return (TRUE);
    else
        SYNTAX_ERROR("Select alternative");
    end if;                                -- if delay_statement
elsif (BYPASS(TOKEN_TERMINATE)) then
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Select alternative");
    end if;                                -- if bypass(token_semicolon)
else
    return (FALSE);
end if;                                    -- if bypass(token_accept)
end SELECT_ALTERNATIVE;

```

```

-----

-- SELECT_ENTRY_CALL --> else SEQUENCE_OF_STATEMENTS
--                               --> or delay DELAY_STATEMENT [SEQUENCE_OF_STATEMENTS ?]
function SELECT_ENTRY_CALL return boolean is
begin
    put (RESULT_FILE, "In select_entry_call "); new_line (RESULT_FILE);
    if (BYPASS(TOKEN_ELSE)) then
        if (SEQUENCE_OF_STATEMENTS) then
            return (TRUE);
        else
            SYNTAX_ERROR("Select entry call");
        end if;                            -- if sequence_of_statements
    elsif (BYPASS(TOKEN_OR)) then
        if (BYPASS(TOKEN_DELAY)) then
            if (DELAY_STATEMENT) then
                if (SEQUENCE_OF_STATEMENTS) then
                    null;
                end if;                            -- if sequence_of_statements
                return (TRUE);
            else
                SYNTAX_ERROR("Select entry call");
            end if;                            -- if delay_statement
        else
            SYNTAX_ERROR("Select entry call");
        end if;                            -- if bypass(token_delay)
    else
        return (FALSE);
    end if;                                -- if bypass(token_else)
end SELECT_ENTRY_CALL;

```

end PARSE_1;

```
--*****--
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME: PACKAGE PARSE_2
-- DATE CREATED: 18 JUL 86
-- LAST MODIFIED: 30 MAY 87
--
-- AUTHORS:    LCDR JEFFREY L. NIEDER
--             LT KARL S. FAIRBANKS, JR.
--             LCDR PAUL M. HERZIG
-- DESCRIPTION: This package contains thirty-three functions
--             that are the middle level productions for our top-down,
--             recursive descent parser. Each function is preceded
--             by the grammar productions they are implementing.
--
--*****--
```

with PARSE_3, PARSE_4, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
BYPASS_SUPPORT_FUNCTIONS, GLOBAL_PARSER, GLOBAL, TEXT_IO;
use PARSE_3, PARSE_4, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION,
BYPASS_SUPPORT_FUNCTIONS, GLOBAL_PARSER, GLOBAL, TEXT_IO;

package PARSE_2 is

```
IDENT_DECLARE : BOOLEAN := FALSE;
function GENERIC_ACTUAL_PART return boolean;
function GENERIC_ASSOCIATION return boolean;
function GENERIC_FORMAL_PARAMETER return boolean;
function GENERIC_TYPE_DEFINITION return boolean;
function PRIVATE_TYPE_DECLARATION return boolean;
function TYPE_DECLARATION return boolean;
function SUBTYPE_DECLARATION return boolean;
function DISCRIMINANT_PART return boolean;
function DISCRIMINANT_SPECIFICATION return boolean;
function TYPE_DEFINITION return boolean;
function RECORD_TYPE_DEFINITION return boolean;
function COMPONENT_LIST return boolean;
function COMPONENT_DECLARATION return boolean;
function VARIANT_PART return boolean;
function VARIANT return boolean;
function WITH_OR_USE_CLAUSE return boolean;
function FORMAL_PART return boolean;
function IDENTIFIER_DECLARATION return boolean;
function IDENTIFIER_DECLARATION_TAIL return boolean;
function EXCEPTION_TAIL return boolean;
function EXCEPTION_CHOICE return boolean;
function CONSTANT_TERM return boolean;
```

```

function IDENTIFIER_TAIL return boolean;
function PARAMETER_SPECIFICATION return boolean;
function IDENTIFIER_LIST return boolean;
function MODE return boolean;
function DESIGNATOR return boolean;
function SIMPLE_STATEMENT return boolean;
function ASSIGNMENT_OR_PROCEDURE_CALL return boolean;
function LABEL return boolean;
function ENTRY_DECLARATION return boolean;
function REPRESENTATION_CLAUSE return boolean;
function RECORD_REPRESENTATION_CLAUSE return boolean;
end PARSER_2;

```

```

-----
-----

```

```

package body PARSER_2 is

```

```

-- GENERIC_ACTUAL_PART --> (GENERIC_ASSOCIATION [, GENERIC_ASSOCIATION]* )
function GENERIC_ACTUAL_PART return boolean is
begin
  if (BYPASS(TOKEN_LEFT_PAREN)) then
    if (GENERIC_ASSOCIATION) then
      while (BYPASS(TOKEN_COMMA)) loop
        if not (GENERIC_ASSOCIATION) then
          SYNTAX_ERROR("Generic actual part");
        end if;
        -- if not generic_association
      end loop;
    if (BYPASS(TOKEN_RIGHT_PAREN)) then
      return (TRUE);
    else
      SYNTAX_ERROR("Generic actual part");
    end if;
    -- if bypass(token_right_paren)
  else
    SYNTAX_ERROR("Generic actual part");
  end if;
  -- if generic association statement
else
  return(FALSE);
end if;
-- if bypass(token_left_paren)
end GENERIC_ACTUAL_PART;

```

```

-----

```

```

-- GENERIC_ASSOCIATION --> [GENERIC_FORMAL_PARAMETER ?] EXPRESSION
function GENERIC_ASSOCIATION return boolean is
begin
  if (GENERIC_FORMAL_PARAMETER) then
    null;
  end if;
  -- if generic_formal_parameter statement
  if (EXPRESSION) then
    -- check for generic_actual_parameter
    return (TRUE);
  else

```

```

    return (FALSE);
end if;                                -- if expression
end GENERIC_ASSOCIATION;

-----

-- GENERIC_FORMAL_PARAMETER --> identifier =>
--                                --> string_literal =>
function GENERIC_FORMAL_PARAMETER return boolean is
begin
    LOOK_AHEAD_TOKEN := TOKEN_RECORD_BUFFER(TOKEN_ARRAY_INDEX + 1);
    if (ADJUST_LEXEME(LOOK_AHEAD_TOKEN.LEXEME,
        LOOK_AHEAD_TOKEN.LEXEME_SIZE - 1) = ">") then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            if (BYPASS(TOKEN_ARROW)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Generic formal parameter");
            end if;                                -- if bypass(token_arrow)
        elsif (BYPASS(TOKEN_STRING_LITERAL)) then
            if (BYPASS(TOKEN_ARROW)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Generic formal parameter");
            end if;                                -- if bypass(token_arrow)
        else
            SYNTAX_ERROR("Generic formal parameter");
        end if;                                -- if bypass(token_identifier)
    else
        return (FALSE);
    end if;                                -- if adjust_lexeme(lookahead_token)
end GENERIC_FORMAL_PARAMETER;

-----

```

```

-- GENERIC_TYPE_DEFINITION --> ( <> )
--                                --> range <>
--                                --> digits <>
--                                --> delta <>
--                                --> array ARRAY_TYPE_DEFINITION
--                                --> access SUBTYPE_INDICATION
function GENERIC_TYPE_DEFINITION return boolean is
begin
    if (BYPASS(TOKEN_LEFT_PAREN)) then
        if (BYPASS(TOKEN_BRACKETS)) then
            if (BYPASS(TOKEN_RIGHT_PAREN)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Generic type definition");
            end if;                                -- if bypass(token_right_paren)
        else
            SYNTAX_ERROR("Generic type definition");
        end if;
    end if;
end if;

```

```

    end if;                                -- if bypass(token_brackets)
elseif (BYPASS(TOKEN_RANGE)) or else (BYPASS(TOKEN_DIGITS))
    or else (BYPASS(TOKEN_DELTA)) then
    if (BYPASS(TOKEN_BRACKETS)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Generic type definition");
    end if;                                -- if bypass(token_brackets)
elseif (BYPASS(TOKEN_ARRAY)) then
    if (ARRAY_TYPE_DEFINITION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Generic type definition");
    end if;                                -- if array_type_definition
elseif (BYPASS(TOKEN_ACCESS)) then
    if (SUBTYPE_INDICATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Generic type definition");
    end if;                                -- if subtype_indication
else
    return (FALSE);
end if;                                    -- if bypass(token_left_paren)
end GENERIC_TYPE_DEFINITION;

```

```

-- PRIVATE_TYPE_DECLARATION --> [limited ?] private
function PRIVATE_TYPE_DECLARATION return boolean is
begin
    if (BYPASS(TOKEN_LIMITED)) then
        null;
    end if;
    if (BYPASS(TOKEN_PRIVATE)) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end PRIVATE_TYPE_DECLARATION;

```

```

-- SUBTYPE_DECLARATION --> identifier is SUBTYPE_INDICATION ;
function SUBTYPE_DECLARATION return boolean is
begin
    if (BYPASS(TOKEN_IDENTIFIER)) then
        if (BYPASS(TOKEN_IS)) then
            if (SUBTYPE_INDICATION) then
                if (BYPASS(TOKEN_SEMICOLON)) then
                    return (TRUE);
                else
                    SYNTAX_ERROR("Subtype declaration");
                end if;
            end if;
        end if;
    end if;
end SUBTYPE_DECLARATION;

```



```

        end if;                                -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Subtype declaration");
    end if;                                -- if subtype_indication statement
else
    SYNTAX_ERROR("Subtype declaration");
end if;                                -- if bypass(token_is)
else
    return (FALSE);
end if;                                -- if bypass(token_identifier)
end SUBTYPE_DECLARATION;

-----

-- TYPE_DECLARATION --> identifier [DISCRIMINANT_PART ?]
--                                     is SUBTYPE_INDICATION;
function TYPE_DECLARATION return boolean is
begin
    if (BYPASS(TOKEN_IDENTIFIER)) then
        if (DISCRIMINANT_PART) then
            null;
        end if;                                -- if discriminant_part statement
        if (BYPASS(TOKEN_IS)) then            -- declaration is full_type if 'is'
            if (PRIVATE_TYPE_DECLARATION) then
                null;
            elsif (TYPE_DEFINITION) then      -- present, otherwise incomplete_type
                null;
            else
                SYNTAX_ERROR("Type declaration");
            end if;                                -- if type_definition statement
        end if;                                -- if bypass(token_is)
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Type declaration");
        end if;                                -- if bypass(token_semicolon)
    else
        return (FALSE);
    end if;                                -- if bypass(token_identifier)
end TYPE_DECLARATION;

-----

-- DISCRIMINANT_PART --> (DISCRIMINANT SPECIFICATION
--                                     [, DISCRIMINANT_SPECIFICATION]* )
function DISCRIMINANT_PART return boolean is
begin
    if (BYPASS(TOKEN_LEFT_PAREN)) then
        if (DISCRIMINANT_SPECIFICATION) then
            while (BYPASS(TOKEN_SEMICOLON)) loop
                if not (DISCRIMINANT_SPECIFICATION) then
                    SYNTAX_ERROR("Discriminant part");
                end if;
            end loop;
        end if;
    else
        return (FALSE);
    end if;
end DISCRIMINANT_PART;

-----

```

```

        end if;                -- if not discriminant_specification
    end loop;
    if (BYPASS(TOKEN_RIGHT_PAREN)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Discriminant part");
    end if;                -- if bypass(token_right_paren)
else
    SYNTAX_ERROR("Discriminant part");
end if;                -- if discriminant_specification
else
    return (FALSE);
end if;                -- if bypass(token_left_paren)
end DISCRIMINANT_PART;

```

```

-----

-- DISCRIMINANT_SPECIFICATION --> IDENTIFIER_LIST : NAME [:= EXPRESSION ?]
function DISCRIMINANT_SPECIFICATION return boolean is
begin
    if (IDENTIFIER_LIST) then
        if (BYPASS(TOKEN_COLON)) then
            if (NAME) then                -- check for type_mark
                if (BYPASS(TOKEN_ASSIGNMENT)) then
                    if (EXPRESSION) then
                        null;
                    else
                        SYNTAX_ERROR("Discriminant specification");
                    end if;                -- if expression statement
                end if;                -- if bypass(token_assignment)
            end if;
            return (TRUE);
        else
            SYNTAX_ERROR("Discriminant specification");
        end if;                -- if name statement
    else
        SYNTAX_ERROR("Discriminant specification");
    end if;                -- if bypass(token_colon)
else
    return (FALSE);
end if;                -- if identifier_list statement
end DISCRIMINANT_SPECIFICATION;

```

```

-----

-- TYPE_DEFINITION --> ENUMERATION TYPE_DEFINITION
--                --> INTEGER_TYPE_DEFINITION
--                --> digits FLOATING_OR_FIXED_POINT_CONSTRAINT
--                --> delta FLOATING_OR_FIXED_POINT_CONSTRAINT
--                --> array ARRAY_TYPE_DEFINITION
--                --> record RECORD_TYPE_DEFINITION
--                --> access SUBTYPE_INDICATION
--                --> new SUBTYPE_INDICATION

```

```

function TYPE_DEFINITION return boolean is
begin
  if (ENUMERATION_TYPE_DEFINITION) then
    return (TRUE);
  elsif (INTEGER_TYPE_DEFINITION) then
    return (TRUE);
  elsif (BYPASS(TOKEN_DIGITS)) or else (BYPASS(TOKEN_DELTA)) then
    if (FLOATING_OR_FIXED_POINT_CONSTRAINT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Type definition");
    end if;
    -- floating_or_fixed_point_constraint
  elsif (BYPASS(TOKEN_ARRAY)) then
    if (ARRAY_TYPE_DEFINITION) then
      return (TRUE);
    else
      SYNTAX_ERROR("Type definition");
    end if;
    -- if array_type_definition
  elsif (BYPASS(TOKEN_RECORD_STRUCTURE)) then
    if (RECORD_TYPE_DEFINITION) then
      return (TRUE);
    else
      SYNTAX_ERROR("Type definition");
    end if;
    -- if record_type_definition
  elsif (BYPASS(TOKEN_ACCESS)) or else (BYPASS(TOKEN_NEW)) then
    if (SUBTYPE_INDICATION) then
      return (TRUE);
    else
      SYNTAX_ERROR("Type definition");
    end if;
    -- if subtype_indication
  else
    return (FALSE);
  end if;
end TYPE_DEFINITION;

```

```

-----

-- RECORD_TYPE_DEFINITION --> COMPONENT_LIST end record
function RECORD_TYPE_DEFINITION return boolean is
begin
  if (COMPONENT_LIST) then
    if (BYPASS(TOKEN_END)) then
      if (BYPASS(TOKEN_RECORD_STRUCTURE)) then
        return (TRUE);
      else
        SYNTAX_ERROR("Record type definition");
      end if;
      -- if bypass(token_record-structure)
    else
      SYNTAX_ERROR("Record type definition");
    end if;
    -- if bypass(token_end)
  else
    return (FALSE);
  end if;
end RECORD_TYPE_DEFINITION;

```

```

    end if;                                -- if component_list statement
end RECORD_TYPE_DEFINITION;

```

```

-----

-- COMPONENT_LIST --> [COMPONENT_DECLARATION]* [VAARIANT_PART ?]
--                               --> null ;
function COMPONENT_LIST return boolean is
begin
    while (COMPONENT_DECLARATION) loop
        null;
    end loop;
    if (VARIANT_PART) then
        null;
    elsif (BYPASS(TOKEN_NULL)) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            null;
        end if;
    end if;
    return (TRUE);
end COMPONENT_LIST;

```

```

-----

-- COMPONENT_DECLARATION --> IDENTIFIER_LIST : SUBTYPE_INDICATION
--                               |:= EXPRESSION ?| ;
function COMPONENT_DECLARATION return boolean is
begin
    if (IDENTIFIER_LIST) then
        if (BYPASS(TOKEN_COLON)) then
            if (SUBTYPE_INDICATION) then
                if (BYPASS(TOKEN_ASSIGNMENT)) then
                    if (EXPRESSION) then
                        if (BYPASS(TOKEN_SEMICOLON)) then
                            return (TRUE);
                        else
                            SYNTAX_ERROR("Component declaration");
                        end if;
                    end if;
                end if;
            end if;
        else
            SYNTAX_ERROR("Component declaration");
        end if;
    end if;
    -- if expression statement
    -- if bypass(token_assignment)
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Component declaration");
    end if;
    -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Component declaration");
    end if;
    -- if subtype_indication statement
    else
        SYNTAX_ERROR("Component declaration");
    end if;

```

```

        end if;                                -- if bypass(token_colon)
    else
        return (FALSE);
    end if;                                -- if identifier_list statement
end COMPONENT_DECLARATION;

```

```

-- VARIANT_PART --> case identifier is [VARIANT]+ end case ;
function VARIANT_PART return boolean is
begin

```

```

    if (BYPASS(TOKEN_CASE)) then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            if (BYPASS(TOKEN_IS)) then
                if (VARIANT) then
                    while (VARIANT) loop
                        null;
                    end loop;
                end if;
                if (BYPASS(TOKEN_END)) then
                    if (BYPASS(TOKEN_CASE)) then
                        if (BYPASS(TOKEN_SEMICOLON)) then
                            return (TRUE);
                        else
                            SYNTAX_ERROR("Variant part");
                        end if;
                        -- if bypass(token_semicolon)
                    else
                        SYNTAX_ERROR("Variant part");
                    end if;
                    -- if bypass(token_case)
                else
                    SYNTAX_ERROR("Variant part");
                end if;
                -- if bypass(token_end)
            else
                SYNTAX_ERROR("Variant part");
            end if;
            -- if variant statement
        else
            SYNTAX_ERROR("Variant part");
        end if;
        -- if bypass(token_is)
    else
        SYNTAX_ERROR("Variant part");
    end if;
    -- if bypass(token_identifier)
else
    return (FALSE);
end if;
-- if bypass(token_case)
end VARIANT_PART;

```

```

-- VARIANT --> when CHOICE [ CHOICE]* => COMPONENT_LIST
function VARIANT return boolean is
begin
    if (BYPASS(TOKEN_WHEN)) then
        if (CHOICE) then

```

```

while (BYPASS(TOKEN_BAR)) loop
  if not (CHOICE) then
    SYNTAX_ERROR("Variant");
  end if; -- if not choice statement
end loop;
if (BYPASS(TOKEN_ARROW)) then
  if (COMPONENT_LIST) then
    return (TRUE);
  else
    SYNTAX_ERROR("Variant");
  end if; -- if component_list statement
else
  SYNTAX_ERROR("Variant");
end if; -- if bypass(token_arrow)
else
  SYNTAX_ERROR("Variant");
end if; -- if choice statement
else
  return (FALSE);
end if; -- if bypass(token_when)
end VARIANT;

```

```

-----
-- WITH_OR_USE_CLAUSE --> identifier [, identifier]* ;
function WITH_OR_USE_CLAUSE return boolean is
begin
  if (BYPASS(TOKEN_IDENTIFIER)) then
    while (BYPASS(TOKEN_COMMA)) loop
      if not (BYPASS(TOKEN_IDENTIFIER)) then
        SYNTAX_ERROR("With or use clause");
      end if;
    end loop;
  if (BYPASS(TOKEN_SEMICOLON)) then
    return (TRUE);
  else
    SYNTAX_ERROR("With or use clause");
  end if; -- if bypass(token_semicolon)
else
  return (FALSE);
end if; -- if bypass(token_identifier)
end WITH_OR_USE_CLAUSE;

```

```

-----
-- FORMAL_PART --> (PARAMETER_SPECIFICATION [; PARAMETER_SPECIFICATION]* )
function FORMAL_PART return boolean is
begin
  if (BYPASS(TOKEN_LEFT_PAREN)) then
    FORMAL_PARAM_DECLARE := TRUE;
    if (PARAMETER_SPECIFICATION) then
      while (BYPASS(TOKEN_SEMICOLON)) loop

```



```

    if not (PARAMETER SPECIFICATION) then
        SYNTAX_ERROR("Formal part");
    end if;
    -- if not parameter_specification statement
end loop;
if (BYPASS(TOKEN RIGHT_PAREN)) then
    if PACKAGE_BODY_DECLARE then
        WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_PARAM_DECLARE,
            NONE, NEXT_HEN);
        CREATE_NODE(NEXT_HEN, LAST_RECORD);
    end if;
    FORMAL_PARAM_DECLARE := FALSE;
    return (TRUE);
else
    SYNTAX_ERROR("Formal part");
end if;
    -- if bypass(token_right_paren) statement
else
    SYNTAX_ERROR("Formal part");
end if;
    -- if parameter_specification statement
else
    return (FALSE);
end if;
    -- if bypass(token_left_paren) statement
end FORMAL_PART;

```

```

-- IDENTIFIER_DECLARATION --> IDENTIFIER_LIST : IDENTIFIER_DECLARATION_TAIL
function IDENTIFIER_DECLARATION return boolean is
begin
    put(RESULT_FILE, "IN IDENTIFIER DECLARATION"); NEW_LINE(RESULT_FILE);
    HENRY_WRITE_ENABLE := TRUE;
    IDENT_DECLARE := TRUE;
    if (IDENTIFIER_LIST) then
        if (BYPASS(TOKEN COLON)) then
            if (IDENTIFIER_DECLARATION_TAIL) then
                HENRY_WRITE_ENABLE := FALSE;

                return (TRUE);
            else
                SYNTAX_ERROR("Identifier declaration");
            end if;
            -- if identifier list statement
        else
            SYNTAX_ERROR("Identifier declaration");
        end if;
            -- if bypass(token_colon)
    else
        return(FALSE);
    end if;
        -- if identifier list statement
end IDENTIFIER_DECLARATION;

```

```

-- IDENTIFIER_DECLARATION_TAIL --> exception EXCEPTION_TAIL
--
--> constant CONSTANT_TERM

```

```

--> array ARRAY_TYPE_DEFINITION
--> [:= EXPRESSION ?] ;
--> NAME IDENTIFIER_TAIL
function IDENTIFIER_DECLARATION_TAIL return boolean is
begin
put (RESULT_FILE, "IN IDENTIFIER DECLARATION TAIL"); NEW_LINE (RESULT_FILE);
if (BYPASS (TOKEN_EXCEPTION)) then
    if (EXCEPTION_TAIL) then
        return (TRUE);
    else
        SYNTAX_ERROR ("Identifier declaration tail");
    end if;
    -- if exception tail statement
elsif (BYPASS (TOKEN_CONSTANT)) then
    if (CONSTANT_TERM) then
        return (TRUE);
    else
        SYNTAX_ERROR ("Identifier declaration tail");
    end if;
    -- if constant_term statement
elsif (BYPASS (TOKEN_ARRAY)) then
    if (ARRAY_TYPE_DEFINITION) then
        if (BYPASS (TOKEN_ASSIGNMENT)) then
            if (EXPRESSION) then
                null;
            else
                SYNTAX_ERROR ("Identifier declaration tail");
            end if;
            -- if expression statement
        end if;
        -- if bypass(token_assignment)
    else
        SYNTAX_ERROR ("Identifier declaration tail");
    end if;
    -- if array_type_definition
    if (BYPASS (TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR ("Identifier declaration tail");
    end if;
    -- if bypass(token_semicolon)
elsif (NAME) then
    if (IDENTIFIER_TAIL) then
        return (TRUE);
    else
        SYNTAX_ERROR ("Identifier declaration tail");
    end if;
    -- if identifier_tail
else
    return (FALSE);
    -- if bypass(token_exception)
end if;
end IDENTIFIER_DECLARATION_TAIL;

```

```

-----

-- EXCEPTION_TAIL --> ;
--> renames NAME ;
function EXCEPTION_TAIL return boolean is
begin

```

```

if (BYPASS(TOKEN_SEMICOLON)) then
    return (TRUE);
elsif (BYPASS(TOKEN_RENAMES)) then
    if (NAME) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Exception tail");
        end if;
        -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Exception tail");
    end if;
    -- if name statement
else
    return (FALSE);
end if;
-- if bypass(token_semicolon)
end EXCEPTION_TAIL;

```

```

-----
-- EXCEPTION_CHOICE --> identifier
--                      --> others
function EXCEPTION_CHOICE return boolean is
begin
    if (BYPASS(TOKEN_IDENTIFIER)) then
        return (TRUE);
    elsif (BYPASS(TOKEN_OTHERS)) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end EXCEPTION_CHOICE;

```

```

-----
-- CONSTANT_TERM --> array ARRAY_TYPE_DEFINITION [:= EXPRESSION ?] ;
--                      := EXPRESSION ;
--                      --> NAME IDENTIFIER TAIL
function CONSTANT_TERM return boolean is
begin
    if (BYPASS(TOKEN_ARRAY)) then
        if (ARRAY_TYPE_DEFINITION) then
            if (BYPASS(TOKEN_ASSIGNMENT)) then
                if (EXPRESSION) then
                    null;
                else
                    SYNTAX_ERROR("Constant term");
                end if;
                -- if expression statement
            end if;
            -- if bypass(token_assignment)
        else
            SYNTAX_ERROR("Constant term");
        end if;
        -- if array_type_definition
    if (BYPASS(TOKEN_SEMICOLON)) then

```

```

    return (TRUE);
else
    SYNTAX_ERROR("Constant term");
end if;
-- if bypass(token_semicolon)
elsif (BYPASS(TOKEN_ASSIGNMENT)) then
    if (EXPRESSION) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Constant term");
        end if;
        -- if bypass(token_semicolon)
    else
        SYNTAX_ERROR("Constant term");
    end if;
    -- if expression statement
elsif (NAME) then
    if (IDENTIFIER_TAIL) then
        return (TRUE);
    else
        SYNTAX_ERROR("Constant term");
    end if;
    -- if identifier_tail statement
else
    return (FALSE);
end if;
-- if bypass(token_array)
end CONSTANT_TERM;

```

```

-----
-- IDENTIFIER_TAIL --> [CONSTRAINT ?] [:= EXPRESSION ?] ;
--
-- --> [renames NAME ?] ;
function IDENTIFIER_TAIL return boolean is
begin
    put(RESULT_FILE, "IN IDENTIFIER TAIL"); NEW_LINE(RESULT_FILE);
    if (CONSTRAINT) then
        null;
    end if;
    -- if constraint statement
    if (BYPASS(TOKEN_RENAMES)) then
        if (NAME) then
            null;
        else
            SYNTAX_ERROR("Identifier tail");
        end if;
        -- if name statement
    end if;
    -- if bypass(token_renames)
    if (BYPASS(TOKEN_ASSIGNMENT)) then
        if (EXPRESSION) then
            null;
        else
            SYNTAX_ERROR("Identifier tail");
        end if;
        -- if expression statement
    end if;
    -- if bypass(token_assignment)
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else

```

```

    return (FALSE);
end if;                                -- if bypass(token_semicolon)
end IDENTIFIER_TAIL;

```

```

-----

-- PARAMETER SPECIFICATION --> IDENTIFIER_LIST : MODE NAME [:= EXPRESSION ?]
function PARAMETER_SPECIFICATION return boolean is
begin
put(RESULT_FILE, "IN PARAMETER SPECIFICATION"); NEW_LINE(RESULT_FILE);
HENRY_WRITE_ENABLE := TRUE; --to capture first parameter
if (IDENTIFIER_LIST) then
    if (BYPASS(TOKEN_COLON)) then
        if (MODE) then
            if (NAME) then                -- check for type_mark
                if (BYPASS(TOKEN_ASSIGNMENT)) then
                    if (EXPRESSION) then
                        null;
                    else
                        SYNTAX_ERROR("Parameter specification");
                    end if;                -- if expression statement
                end if;                -- if bypass(token_assignment)
            return (TRUE);
        else
            SYNTAX_ERROR("Parameter specification");
        end if;                -- if name statement
    else
        SYNTAX_ERROR("Parameter specification");
    end if;                -- if mode statement
else
    SYNTAX_ERROR("Parameter specification");
end if;                -- if bypass(token_colon)
else
    return (FALSE);
end if;                -- if identifier_list statement
end PARAMETER_SPECIFICATION;

```

```

-----

-- IDENTIFIER_LIST --> identifier [, identifier]*
function IDENTIFIER_LIST return boolean is
begin
put(RESULT_FILE, "IN IDENTIFIER LIST"); NEW_LINE(RESULT_FILE);
if (BYPASS(TOKEN_IDENTIFIER)) then
    if FORMAL_PARAM_DECLARE AND PACKAGE_BODY_DECLARE then
        WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, NONE, LAST_RECORD);
    elsif (NOT PACKAGE_BODY_DECLARE) then
        WRITE_HENRY_DATA(LOCAL_DECLARE, DUMMY_LEXEME, IDENT_TYPE,
            NONE, LAST_RECORD);
    end if;
    while (BYPASS(TOKEN_COMMA)) loop
        if (IDENT_DECLARE) OR (FORMAL_PARAM_DECLARE AND PACKAGE_BODY_DECLARE)

```

```

then
  HENRY_WRITE_ENABLE := TRUE;
end if;
if FORMAL_PARAM_DECLARE AND PACKAGE_BODY_DECLARE then
  WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE,
    NONE, NEXT_HEN);
elsif (NOT FORMAL_PARAM_DECLARE) then
  WRITE_HENRY_DATA(LOCAL_DECLARE, DUMMY_LEXEME, IDENT_TYPE,
    NONE, NEXT_HEN);
end if;
if not (BYPASS(TOKEN_IDENTIFIER)) then
  SYNTAX_ERROR("Identifier list");
end if;
-- if not bypass(token_identifier) statement
end loop;
return (TRUE);
else
  return (FALSE);
end if;
-- if bypass(token_identifier) statement
end IDENTIFIER_LIST;

-----

-- MODE --> [in ?]
--      --> in out
--      --> out
function MODE return boolean is
begin
  put(RESULT_FILE, "IN PARAMETER MODE"); NEW_LINE(RESULT_FILE);
  if (BYPASS(TOKEN_IN)) then
    if PACKAGE_BODY_DECLARE THEN
      WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, IN_TYPE, LAST_RECORD)
    end if;
    if (BYPASS(TOKEN_OUT)) then
      if PACKAGE_BODY_DECLARE then
        WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE,
          IN_OUT_TYPE, LAST_RECORD);
      end if;
    end if;
  elsif (BYPASS(TOKEN_OUT)) then
    if PACKAGE_BODY_DECLARE then
      WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, OUT_TYPE, LAST_RECORD)
    end if;
  end if;
  if (LAST_RECORD.TYPE_DEFINE = PARAM_TYPE)
    AND (LAST_RECORD.PARAM_TYPE = NONE) THEN
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, IN_TYPE, LAST_RECORD)
  end if;
  return (TRUE);
end MODE;

-----

```



```

-- DESIGNATOR --> identifier
--             --> string_literal
function DESIGNATOR return boolean is
begin
  if (BYPASS(TOKEN_IDENTIFIER)) then
    return (TRUE);
  elsif (BYPASS(TOKEN_STRING_LITERAL)) then
    return (TRUE);
  else
    return (FALSE);
  end if;
end DESIGNATOR;

```

```

-----
-- SIMPLE_STATEMENT --> null ;
--                   --> ASSIGNMENT_OR_PROCEDURE_CALL
--                   --> exit EXIT_STATEMENT
--                   --> return RETURN_STATEMENT
--                   --> goto GOTO_STATEMENT
--                   --> delay DELAY_STATEMENT
--                   --> abort ABORT_STATEMENT
--                   --> raise RAISE_STATEMENT
function SIMPLE_STATEMENT return boolean is
begin
  if (BYPASS(TOKEN_NULL)) then
    if (BYPASS(TOKEN_SEMICOLON)) then
      return (TRUE);
    else
      SYNTAX_ERROR("Simple statement");
    end if;
  elsif (ASSIGNMENT_OR_PROCEDURE_CALL) then -- includes a check for a
    return (TRUE);                          -- code statement and an
                                              -- entry call statement.
  elsif (BYPASS(TOKEN_EXIT)) then
    if (EXIT_STATEMENT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Simple statement");
    end if;
  elsif (BYPASS(TOKEN_RETURN)) then
    if (RETURN_STATEMENT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Simple statement");
    end if;
  elsif (BYPASS(TOKEN_GOTO)) then
    if (GOTO_STATEMENT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Simple statement");
    end if;

```

```

elsif (BYPASS(TOKEN_DELAY)) then
  if (DELAY_STATEMENT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Simple statement");
  end if;
elsif (BYPASS(TOKEN_ABORT)) then
  if (ABORT_STATEMENT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Simple statement");
  end if;
elsif (BYPASS(TOKEN_RAISE)) then
  if (RAISE_STATEMENT) then
    return (TRUE);
  else
    SYNTAX_ERROR("Simple statement");
  end if;
else
  return (FALSE);
end if;
end SIMPLE_STATEMENT;

```

```

-----

-- ASSIGNMENT_OR_PROCEDURE_CALL --> NAME := EXPRESSION ;
--                                --> NAME ;
function ASSIGNMENT_OR_PROCEDURE_CALL return boolean is

ASSIGN_POINTER, FUNCALL_POINTER : POINTER;

begin
put(result_file, "in assign or procedure call"); new_line(result_file);
HENRY_WRITE_ENABLE := TRUE;
ASSIGN_POINTER := NEXT_HEN;
if (NAME) then
  if (BYPASS(TOKEN_ASSIGNMENT)) then
    ASSIGN_STATEMENT := TRUE;
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, ASSIGN_TYPE,
                     NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
  if NAME_TAIL_SET then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PROCALL_OR_DS,
                     NONE, ASSIGN_POINTER);
  end if;
  FUNCALL_POINTER := NEXT_HEN;
  HENRY_WRITE_ENABLE := TRUE;
  if (EXPRESSION) then
    if (BYPASS(TOKEN_SEMICOLON)) then
      NAME_TAIL_SET := FALSE;
      ASSIGN_STATEMENT := FALSE;
      WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_ASSIGN_TYPE,

```

```

        NONE, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    HENRY_WRITE_ENABLE := FALSE;
    return (TRUE);          -- parsed an assignment statement
else
    SYNTAX_ERROR("Assignment or procedure call");
end if;                    -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Assignment or procedure call");
end if;                    -- if expression statement
elsif (BYPASS(TOKEN_SEMICOLON)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PROCALL_OR_DS,
        NONE, ASSIGN_POINTER);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    return (TRUE);          -- parsed a procedure call statement
else
    SYNTAX_ERROR("Assignment or procedure call");
end if;                    -- if bypass(token_assignment)
else
    return (FALSE);
end if;                    -- if name statement
end ASSIGNMENT_OR_PROCEDURE_CALL;

```

```

-----

-- LABEL --> << identifier >>
function LABEL return boolean is
begin
    if (BYPASS(TOKEN_LEFT_BRACKET)) then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            if (BYPASS(TOKEN_RIGHT_BRACKET)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Label");
            end if;          -- if bypass(token_right_bracket)
        else
            SYNTAX_ERROR("Label");
        end if;            -- if bypass(token_identifier)
    else
        return (FALSE);
    end if;                -- if bypass(token_left_bracket)
end LABEL;

```

```

-----

-- ENTRY_DECLARATION --> entry identifier [(DISCRETE_RANGE) ?]
--                               [FORMAL_PART ?] ;
function ENTRY_DECLARATION return boolean is
begin
    if (BYPASS(TOKEN_ENTRY)) then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            if (BYPASS(TOKEN_LEFT_PAREN)) then

```

```

if (DISCRETE_RANGE) then
  if (BYPASS(TOKEN_RIGHT_PAREN)) then
    null;
  else
    SYNTAX_ERROR("Entry declaration");
  end if;
  -- if bypass(token_right_paren)
else
  SYNTAX_ERROR("Entry declaration");
end if;
-- if discrete_range statement
end if;
-- if bypass(token_left_paren)
if (FORMAL_PART) then
  null;
end if;
-- if formal_part statement
if (BYPASS(TOKEN_SEMICOLON)) then
  return (TRUE);
else
  SYNTAX_ERROR("Entry declaration");
end if;
-- if bypass(token_semicolon)
else
  SYNTAX_ERROR("Entry declaration");
end if;
-- if bypass(token_identifier)
else
  return (FALSE);
end if;
-- if bypass(token_entry)
end ENTRY_DECLARATION;

```

```

-----
-- REPRESENTATION_CLAUSE --> for NAME use record RECORD_REPRESENTATION_CLAUSE
-- --> for NAME use [at ?] SIMPLE_EXPRESSION;
function REPRESENTATION_CLAUSE return boolean is
begin
  if (BYPASS(TOKEN_FOR)) then
    if (NAME) then
      if (BYPASS(TOKEN_USE)) then
        if (BYPASS(TOKEN_RECORD_STRUCTURE)) then
          if (RECORD_REPRESENTATION_CLAUSE) then
            return (TRUE);
          else
            SYNTAX_ERROR("Representation clause");
          end if;
          -- if record_representation_clause
        elsif (BYPASS(TOKEN_AT)) then
          if (SIMPLE_EXPRESSION) then
            if (BYPASS(TOKEN_SEMICOLON)) then
              return (TRUE);
            else
              SYNTAX_ERROR("Representation clause");
            end if;
            -- if bypass(token_semicolon)
          else
            SYNTAX_ERROR("Representation clause");
          end if;
          -- if simple_expression statement
        elsif (SIMPLE_EXPRESSION) then

```

```

    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        SYNTAX_ERROR("Representation clause");
    end if;
    -- if bypass(token_semicolon)
else
    SYNTAX_ERROR("Representation clause");
end if;
    -- if bypass(token_record)
else
    SYNTAX_ERROR("Representation clause");
end if;
    -- if bypass(token_use)
else
    SYNTAX_ERROR("Representation clause");
end if;
    -- if name statement
else
    return (FALSE);
end if;
    -- if bypass(token_for)
end REPRESENTATION_CLAUSE;

```

```

-----
-- RECORD_REPRESENTATION_CLAUSE --> [at mod SIMPLE_EXPRESSION ?]
--                                     [NAME at SIMPLE_EXPRESSION range RANGES]*
--                                     end record ;
function RECORD_REPRESENTATION_CLAUSE return boolean is
begin
    if (BYPASS(TOKEN_AT)) then
        if (BYPASS(TOKEN_MOD)) then
            if (SIMPLE_EXPRESSION) then
                null;
            else
                SYNTAX_ERROR("Record representation clause");
            end if;
            -- if simple_expression
        else
            SYNTAX_ERROR("Record representation clause");
        end if;
        -- if bypass(token_mod)
    end if;
    -- if bypass(token_at)
    while (NAME) loop
        if (BYPASS(TOKEN_AT)) then
            if (SIMPLE_EXPRESSION) then
                if (BYPASS(TOKEN_RANGE)) then
                    if (RANGES) then
                        null;
                    else
                        SYNTAX_ERROR("Record representation clause");
                    end if;
                    -- if ranges statement
                else
                    SYNTAX_ERROR("Record representation clause");
                end if;
                -- if bypass(token_range)
            else
                SYNTAX_ERROR("Record representation clause");
            end if;
            -- if simple_expression

```

```

else
  SYNTAX_ERROR("Record representation clause");
end if;
-- if bypass(token_at)
end loop;
if (BYPASS(TOKEN_END)) then
  if (BYPASS(TOKEN_RECORD_STRUCTURE)) then
    if (BYPASS(TOKEN_SEMICOLON)) then
      return (TRUE);
    else
      SYNTAX_ERROR("Record representation clause");
    end if;
    -- if bypass(token_semicolon)
  else
    SYNTAX_ERROR("Record representation clause");
  end if;
  -- if bypass(token_record_structure)
else
  return (FALSE);
end if;
-- if bypass(token_end)
end RECORD_REPRESENTATION_CLAUSE;

end PARSE_2;

```

```

--*****--
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME:  PACKAGE PARSE_3
-- DATE CREATED: 22 JUL 86
-- LAST MODIFIED: 30 MAY 87
--
-- AUTHORS:     LCDR JEFFREY L. NIEDER
--              LT KARL S. FAIRBANKS, JR.
--              LCDR PAUL M. HERZIG
-- DESCRIPTION:  This package contains thirty-five functions
--              that make up the baseline productions for our top-down,
--              recursive descent parser. Each function is preceded
--              by the grammar productions they are implementing.
--
--*****--

```

```

with PARSE_4, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION, HALSTEAD_METRIC,
  GLOBAL_PARSER, GLOBAL, TEXT_IO;
use PARSE_4, HENRY_GLOBAL, HENRY, BYPASS_FUNCTION, HALSTEAD_METRIC,
  GLOBAL_PARSER, GLOBAL, TEXT_IO;

```

```

package PARSE_3 is
  function SUBTYPE_INDICATION return boolean;
  function ARRAY_TYPE_DEFINITION return boolean;
  function CHOICE return boolean;
  function ITERATION_SCHEME return boolean;
  function LOOP_PARAMETER_SPECIFICATION return boolean;

```



```

function EXPRESSION return boolean;
function RELATION return boolean;
function RELATION_TAIL return boolean;
function SIMPLE_EXPRESSION return boolean;
function SIMPLE_EXPRESSION_TAIL return boolean;
function TERM return boolean;
function FACTOR return boolean;
function PRIMARY return boolean;
function CONSTRAINT return boolean;
function FLOATING_OR_FIXED_POINT_CONSTRAINT return boolean;
function INDEX_CONSTRAINT return boolean;
function RANGES return boolean;
function AGGREGATE return boolean;
function COMPONENT_ASSOCIATION return boolean;
function ALLOCATOR return boolean;
function NAME return boolean;
function NAME_TAIL return boolean;
function LEFT_PAREN_NAME_TAIL return boolean;
function ATTRIBUTE_DESIGNATOR return boolean;
function INTEGER_TYPE_DEFINITION return boolean;
function DISCRETE_RANGE return boolean;
function EXIT_STATEMENT return boolean;
function RETURN_STATEMENT return boolean;
function GOTO_STATEMENT return boolean;
function DELAY_STATEMENT return boolean;
function ABORT_STATEMENT return boolean;
function RAISE_STATEMENT return boolean;
end PARSE_3;

```

```

-----
-----

package body PARSE_3 is

```

```

-- SUBTYPE_INDICATION --> NAME [CONSTRAINT ?]
function SUBTYPE_INDICATION return boolean is
begin
  if (NAME) then
    -- check for type_mark
    if (CONSTRAINT) then
      null;
    end if;
    return (TRUE);
  else
    return (FALSE);
  end if;
end SUBTYPE_INDICATION;

```

```

-----

-- ARRAY_TYPE_DEFINITION --> (INDEX_CONSTRAINT of SUBTYPE_INDICATION
-- this function parses both constrained and unconstrained arrays
function ARRAY_TYPE_DEFINITION return boolean is

```

```

begin
  if (BYPASS(TOKEN LEFT_PAREN)) then
    if (INDEX_CONSTRAINT) then
      if (BYPASS(TOKEN_OF)) then
        if (SUBTYPE_INDICATION) then
          return (TRUE);
        else
          SYNTAX_ERROR("Array definition");
        end if;
        -- if subtype_indication
      else
        SYNTAX_ERROR("Array definition");
      end if;
      -- if bypass(token_of)
    else
      SYNTAX_ERROR("Array definition");
    end if;
    -- if index_constraint statement
  else
    return (FALSE);
  end if;
  -- if bypass(token_left_paren)
end ARRAY_TYPE_DEFINITION;

```

```

-----

-- CHOICE --> EXPRESSION [..SIMPLE_EXPRESSION ?]
--          --> EXPRESSION [CONSTRAINT ?]
--          --> others
function CHOICE return boolean is
begin
  if (EXPRESSION) then
    if (BYPASS(TOKEN_RANGE_DOTS)) then -- check for discrete_range
      if (SIMPLE_EXPRESSION) then
        null;
      else
        SYNTAX_ERROR("Choice");
      end if;
      -- if simple_expression statement
    elsif (CONSTRAINT) then
      null;
    end if;
    -- if bypass token_range_dots
    return (TRUE);
  elsif (BYPASS(TOKEN_OTHERS)) then
    return (TRUE);
  else
    return (FALSE);
  end if;
end CHOICE;

```

```

-----

-- ITERATION_SCHEME --> while EXPRESSION
--          --> for LOOP_PARAMETER_SPECIFICATION
function ITERATION_SCHEME return boolean is
begin
  if (BYPASS(TOKEN_WHILE)) then

```

```

NESTING_METRIC(WHILE_CONSTRUCT);
if (EXPRESSION) then
    return (TRUE);
else
    SYNTAX_ERROR("Iteration scheme");
end if;
elsif (BYPASS(TOKEN_FOR)) then
    NESTING_METRIC(FOR_CONSTRUCT);
    if (LOOP_PARAMETER_SPECIFICATION) then
        return (TRUE);
    else
        SYNTAX_ERROR("Iteration scheme");
    end if;
else
    return (FALSE);
end if;
end ITERATION_SCHEME;

```

```

-- LOOP_PARAMETER_SPECIFICATION --> identifier in reverse ?] DISCRETE_RANGE
function LOOP_PARAMETER_SPECIFICATION return boolean is
begin
    if (BYPASS(TOKEN_IDENTIFIER)) then
        if (BYPASS(TOKEN_IN)) then
            if (BYPASS(TOKEN_REVERSE)) then
                null;
            end if;
            -- if bypass(token_reverse)
            if (DISCRETE_RANGE) then
                return (TRUE);
            else
                SYNTAX_ERROR("Loop parameter specification");
            end if;
            -- if discrete_range statement
        else
            SYNTAX_ERROR("Loop parameter specification");
        end if;
        -- if bypass(token_in)
    else
        return (FALSE);
    end if;
    -- if bypass(token_identifier)
end LOOP_PARAMETER_SPECIFICATION;

```

```

-- EXPRESSION --> RELATION [RELATION_TAIL ?]
function EXPRESSION return boolean is
begin
    if (RELATION) then
        if (RELATION_TAIL) then
            null;
        end if;
        -- if relation_tail statement
        return (TRUE);
    else

```

```

    return (FALSE);
end if;                                -- if relation statement
end EXPRESSION;

-----

-- RELATION --> SIMPLE_EXPRESSION [SIMPLE_EXPRESSION_TAIL ?]
function RELATION return boolean is
begin
    if (SIMPLE_EXPRESSION) then
        if (SIMPLE_EXPRESSION_TAIL) then
            null;
        end if;                        -- if simple_expression_tail statement
        return (TRUE);
    else
        return (FALSE);
    end if;                            -- if simple_expression statement
end RELATION;

-----

-- RELATION_TAIL --> [and [then ?] RELATION]*
--                               --> [or [else ?] RELATION]*
--                               --> [xor RELATION]*
function RELATION_TAIL return boolean is
begin
    while (BYPASS(TOKEN_AND)) loop
        if (BYPASS(TOKEN_THEN)) then
            null;
        end if;                        -- if bypass(token_then)
        if not (RELATION) then
            SYNTAX_ERROR("Relation tail");
        end if;                        -- if not relation statement
    end loop;
    while (BYPASS(TOKEN_OR)) loop
        if (BYPASS(TOKEN_ELSE)) then
            null;
        end if;                        -- if bypass(token_else)
        if not (RELATION) then
            SYNTAX_ERROR("Relation tail");
        end if;                        -- if not relation statement
    end loop;
    while (BYPASS(TOKEN_XOR)) loop
        if not (RELATION) then
            SYNTAX_ERROR("Relation tail");
        end if;                        -- if not relation statement
    end loop;
    return (TRUE);
end RELATION_TAIL;

-----

```

```

-- SIMPLE_EXPRESSION --> [+ ?] TERM [BINARY_ADDING_OPERATOR TERM]*
--                               --> [- ?] TERM [BINARY_ADDING_OPERATOR TERM]*
function SIMPLE_EXPRESSION return boolean is
begin
  if (BYPASS(TOKEN_PLUS) or BYPASS(TOKEN_MINUS)) then
    if (TERM) then
      while (BINARY_ADDING_OPERATOR) loop
        if not (TERM) then
          SYNTAX_ERROR("Simple expression");
        end if;
        -- if not term statement
      end loop;
      return (TRUE);
    else
      SYNTAX_ERROR("Simple expression");
    end if;
    -- if term statement
  elsif (TERM) then
    while (BINARY_ADDING_OPERATOR) loop
      if not (TERM) then
        SYNTAX_ERROR("Simple expression");
      end if;
      -- if not term statement
    end loop;
    return (TRUE);
  else
    return (FALSE);
  end if;
  -- if bypass(token_plus) et al statement
end SIMPLE_EXPRESSION;

```

```

-----
-- SIMPLE_EXPRESSION_TAIL --> RELATIONAL_OPERATOR SIMPLE_EXPRESSION
--                               --> [not ?] in RANGES
--                               --> [not ?] in NAME
function SIMPLE_EXPRESSION_TAIL return boolean is
begin
  if (RELATIONAL_OPERATOR) then
    if (SIMPLE_EXPRESSION) then
      return (TRUE);
    else
      SYNTAX_ERROR("Simple expression tail");
    end if;
    -- if simple_expression statement
  elsif (BYPASS(TOKEN_NOT)) then
    if (BYPASS(TOKEN_IN)) then
      if (RANGES) then
        return (TRUE);
      elsif (NAME) then
        -- check for type_mark
        return (TRUE);
      else
        SYNTAX_ERROR("Simple expression tail");
      end if;
      -- if ranges statement
    else
      SYNTAX_ERROR("Simple expression tail");
    end if;
    -- if bypass(token_in) statement
  end if;

```

```

elseif (BYPASS(TOKEN_IN)) then
  if (RANGES) then
    return (TRUE);
  elseif (NAME) then
    return (TRUE);
  else
    SYNTAX_ERROR("Simple expression tail");
  end if;
else
  return (FALSE);
end if;
end SIMPLE_EXPRESSION_TAIL;

```

```

-----

-- TERM --> FACTOR [MULTIPLYING_OPERATOR FACTOR]*
function TERM return boolean is
begin
  if (FACTOR) then
    while (MULTIPLYING_OPERATOR) loop
      if not (FACTOR) then
        SYNTAX_ERROR("Term");
      end if;
    end loop;
    return (TRUE);
  else
    return (FALSE);
  end if;
end TERM;

```

```

-----

-- FACTOR --> PRIMARY [** PRIMARY ?]
--          --> abs PRIMARY
--          --> not PRIMARY
function FACTOR return boolean is
begin
  if (PRIMARY) then
    if (BYPASS(TOKEN_EXPONENT)) then
      if (PRIMARY) then
        null;
      else
        SYNTAX_ERROR("Factor");
      end if;
    end if;
    return (TRUE);
  elseif (BYPASS(TOKEN_ABSOLUTE)) then
    if (PRIMARY) then
      return (TRUE);
    else
      SYNTAX_ERROR("Factor");
    end if;
  end if;

```



```

elseif (BYPASS(TOKEN_NOT)) then
  if (PRIMARY) then
    return (TRUE);
  else
    SYNTAX_ERROR("Factor");
  end if;          -- if primary(not) statement
else
  return (FALSE);
end if;          -- if primary statement
end FACTOR;

```

```

-----

-- PRIMARY --> numeric_literal
--          --> null
--          --> string_literal
--          --> new ALLOCATOR
--          --> NAME
--          --> AGGREGATE
function PRIMARY return boolean is
begin
  HENRY_WRITE_ENABLE := TRUE;
  if (BYPASS(TOKEN_NUMERIC_LITERAL)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, IDENT_TYPE, NONE, LAST_RECORD);
    return (TRUE);
  elseif (BYPASS(TOKEN_NULL)) then
    return (TRUE);
  elseif (BYPASS(TOKEN_STRING_LITERAL)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, IDENT_TYPE, NONE, LAST_RECORD);
    return (TRUE);
  elseif (BYPASS(TOKEN_NEW)) then
    if (ALLOCATOR) then
      return (TRUE);
    else
      SYNTAX_ERROR("Primary");
    end if;          -- if allocator statement
  elseif (NAME) then
    return (TRUE);
  elseif (AGGREGATE) then
    return (TRUE);
  else
    return (FALSE);
  end if;          -- if bypass(token_left_paren)
end PRIMARY;

```

```

-----

-- CONSTRAINT --> range RANGES
--          --> range <>
--          --> digits FLOATING_OR_FIXED_POINT_CONSTRAINT
--          --> delta FLOATING_OR_FIXED_POINT_CONSTRAINT
--          --> (INDEX_CONSTRAINT

```

```

function CONSTRAINT return boolean is
begin
  if (BYPASS(TOKEN_RANGE)) then
    if (RANGES) then
      return (TRUE);
    elsif (BYPASS(TOKEN_BRACKETS)) then          -- check for <> when parsing
      return (TRUE);                             -- an unconstrained array
    else
      SYNTAX_ERROR("Constraint");
    end if;                                     -- if ranges statement
  elsif (BYPASS(TOKEN_DIGITS)) or else (BYPASS(TOKEN_DELTA)) then
    if (FLOATING_OR_FIXED_POINT_CONSTRAINT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Constraint");
    end if;
  elsif (BYPASS(TOKEN_LEFT_PAREN)) then
    if (INDEX_CONSTRAINT) then
      return (TRUE);
    else
      SYNTAX_ERROR("Constraint");
    end if;
  else
    return (FALSE);
  end if;
end CONSTRAINT;

```

```

-----

-- FLOATING_OR_FIXED_POINT_CONSTRAINT --> SIMPLE_EXPRESSION [range RANGES ?]
function FLOATING_OR_FIXED_POINT_CONSTRAINT return boolean is
begin
  if (SIMPLE_EXPRESSION) then
    if (BYPASS(TOKEN_RANGE)) then
      if (RANGES) then
        null;
      else
        SYNTAX_ERROR("Floating or fixed point constraint");
      end if;                                -- if ranges statement
    end if;                                -- if bypass(token_range)
    return (TRUE);
  else
    return (FALSE);
  end if;                                -- if simple_expression statement
end FLOATING_OR_FIXED_POINT_CONSTRAINT;

```

```

-----

-- INDEX_CONSTRAINT --> DISCRETE_RANGE [, DISCRETE_RANGE]* )
function INDEX_CONSTRAINT return boolean is
begin
  if (DISCRETE_RANGE) then

```

```

while (BYPASS(TOKEN_COMMA)) loop
  if not (DISCRETE_RANGE) then
    SYNTAX_ERROR("Index constraint");
  end if;
end loop;
if (BYPASS(TOKEN_RIGHT_PAREN)) then
  return (TRUE);
else
  SYNTAX_ERROR("Index constraint");
end if;
return (FALSE);
end if;
end INDEX_CONSTRAINT;

```

```

-----
-- RANGES --> SIMPLE_EXPRESSION [..SIMPLE_EXPRESSION ?]
function RANGES return boolean is
begin
  if (SIMPLE_EXPRESSION) then
    if (BYPASS(TOKEN_RANGE_DOTS)) then
      if (SIMPLE_EXPRESSION) then
        null;
      else
        SYNTAX_ERROR("Ranges");
      end if;
    end if;
    return (TRUE);
  else
    return (FALSE);
  end if;
end RANGES;

```

```

-----
-- AGGREGATE --> (COMPONENT_ASSOCIATION [, COMPONENT_ASSOCIATION]* )
function AGGREGATE return boolean is
begin
  if (BYPASS(TOKEN_LEFT_PAREN)) then
    if (COMPONENT_ASSOCIATION) then
      while (BYPASS(TOKEN_COMMA)) loop
        if not (COMPONENT_ASSOCIATION) then
          SYNTAX_ERROR("Aggregate");
        end if;
      end loop;
    end if;
    if (BYPASS(TOKEN_RIGHT_PAREN)) then
      return (TRUE);
    else
      SYNTAX_ERROR("Aggregate");
    end if;
  else
    return (FALSE);
  end if;
end AGGREGATE;

```

```

        SYNTAX_ERROR("Aggregate");
    end if;
else
    return (FALSE);
end if;
end AGGREGATE;

```

```

-----

-- COMPONENT_ASSOCIATION --> [CHOICE || CHOICE]* => ?] EXPRESSION
function COMPONENT_ASSOCIATION return boolean is
begin
    if (CHOICE) then
        while (BYPASS(TOKEN_BAR)) loop
            if not (CHOICE) then
                SYNTAX_ERROR("Component asociation");
            end if;
        end loop;
        if (BYPASS(TOKEN_ARROW)) then
            if (EXPRESSION) then
                null;
            else
                SYNTAX_ERROR("Component asociation");
            end if;
        end if;
        return (TRUE);
    else
        return (FALSE);
    end if;
end COMPONENT_ASSOCIATION;

```

```

-----

-- ALLOCATOR --> SUBTYPE_INDICATION ['AGGREGATE ?]
function ALLOCATOR return boolean is
begin
    if (SUBTYPE_INDICATION) then
        if (BYPASS(TOKEN_APOSTROPHE)) then
            if (AGGREGATE) then
                null;
            else
                SYNTAX_ERROR("Allocator");
            end if;
        end if;
        return (TRUE);
    else
        return (FALSE);
    end if;
end ALLOCATOR;

```

```

-- NAME --> identifier [NAME_TAIL ?]
--      --> character_literal [NAME_TAIL ?]
--      --> string_literal [NAME_TAIL ?]
function NAME return boolean is

```

```

begin
put(result_file, "in name"); new_line(result_file);
if (BYPASS(TOKEN_IDENTIFIER)) then
    NAME_POINTER := LAST_RECORD;
    if (NAME_TAIL) then
        null;
    end if;
    return (TRUE);
HENRY_WRITE_ENABLE := TRUE;
elsif (BYPASS(TOKEN_CHARACTER_LITERAL)) then
    if (NAME_TAIL) then
        null;
    end if;
    return (TRUE);
elsif (BYPASS(TOKEN_STRING_LITERAL)) then
    if (NAME_TAIL) then
        null;
    end if;
    return (TRUE);
else
    return (FALSE);
end if;
end NAME;

```

```

-----

-- NAME_TAIL --> (LEFT_PAREN NAME_TAIL
--              --> .SELECTOR [NAME_TAIL]*
--              --> 'AGGREGATE [NAME_TAIL]*
--              --> 'ATTRIBUTE DESIGNATOR [NAME_TAIL]*
function NAME_TAIL return boolean is
begin
put(result_file, "in name tail"); new_line(result_file);
if (BYPASS(TOKEN_LEFT_PAREN)) then
    NAME_TAIL_SET := TRUE;
    HENRY_WRITE_ENABLE := TRUE;
    if ASSIGN_STATEMENT then
        WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, FUNCALL_OR_DS,
                        NONE, NAME_POINTER);
    else WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PROCALL_OR_DS,
                        NONE, NAME_POINTER);
    end if;
    if (LEFT_PAREN_NAME_TAIL) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end if;

```

```

end if;                -- if left_paren_name_tail
elsif (BYPASS(TOKEN_PERIOD)) then
  if (SELECTOR) then
    while (NAME_TAIL) loop
      null;
    end loop;
    return (TRUE);
  else
    SYNTAX_ERROR("Name tail");
  end if;                -- if selector statement
elsif (BYPASS(TOKEN_APOSTROPHE)) then
  if (AGGREGATE) then
    while (NAME_TAIL) loop
      null;
    end loop;
    return (TRUE);
  elsif (ATTRIBUTE_DESIGNATOR) then
    while (NAME_TAIL) loop
      null;
    end loop;
    return (TRUE);
  else
    SYNTAX_ERROR("Name tail");
  end if;                -- if aggregate statement
else
  return (FALSE);
end if;                -- if bypass(token_left_paren)
end NAME_TAIL;

```

```

-- LEFT_PAREN_NAME_TAIL --> [FORMAL_PARAMETER ?] EXPRESSION [..EXPRESSION ?]
--                        [, [FORMAL_PARAMETER ?] EXPRESSION [..EXPRESSION ?]]*
--                        ) [NAME_TAIL]*
function LEFT_PAREN_NAME_TAIL return boolean is
begin
  put(result_file, "in left paren name tail"); new_line(result_file);
  if (FORMAL_PARAMETER) then                -- check for optional formal parameter
    null;                                   -- before the actual parameter
  end if;                                   -- if formal_parameter statement
  HENRY_WRITE_ENABLE := TRUE;
  if (EXPRESSION) then
    if NAME_TAIL_SET then
      WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, ACTUAL_PARAM,
        LAST_RECORD);
    end if;
    if (BYPASS(TOKEN_RANGE_DOTS)) then
      if not (EXPRESSION) then
        SYNTAX_ERROR("Left paren name tail");
      end if;                -- if not expression statement
    end if;                -- if bypass(token_range_dots)
    while (BYPASS(TOKEN_COMMA)) loop

```



```

if (FORMAL_PARAMETER) then
    null;
end if;
-- if formal_parameter statement
HENRY WRITE_ENABLE := TRUE;
if not (EXPRESSION) then
    SYNTAX_ERROR("Left paren name tail");
end if;
-- if not expression statement
if (BYPASS(TOKEN_RANGE_DOTS)) then
    if not (EXPRESSION) then
        SYNTAX_ERROR("Left paren name tail");
    end if;
    -- if not expression statement
end if;
-- if bypass(token_range_dots)
if NAME_TAIL_SET then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, PARAM_TYPE, ACTUAL_PARAM,
        LAST_RECORD);
end if;
end loop;
if (BYPASS(TOKEN_RIGHT_PAREN)) then
    WRITE_HENRY_DATA(BLANK, DUMMY_LEXEME, END_ACTUAL_PARAM,
        ACTUAL_PARAM, NEXT_HEN);
    CREATE_NODE(NEXT_HEN, LAST_RECORD);
    NAME_TAIL_SET := FALSE;
    while (NAME_TAIL) loop
        null;
    end loop;
    return (TRUE);
else
    return (FALSE);
end if;
-- if bypass(token_right_paren)
elsif (DISCRETE_RANGE) then
    if (BYPASS(TOKEN_RIGHT_PAREN)) then
        while (NAME_TAIL) LOOP
            NULL;
        END LOOP;
        RETURN (TRUE);
    else
        SYNTAX_ERROR("Left paren name tail");
    end if;
else
    return (FALSE);
end if;
-- if bypass(token_right_paren)
end LEFT_PAREN_NAME_TAIL;

```

```

-- ATTRIBUTE DESIGNATOR --> identifier [(EXPRESSION) ?]
--
-- --> range [(EXPRESSION) ?]
-- --> digits [(EXPRESSION) ?]
-- --> delta [(EXPRESSION) ?]
function ATTRIBUTE DESIGNATOR return boolean is
begin
    if (BYPASS(TOKEN_IDENTIFIER)) or else (BYPASS(TOKEN_RANGE)) then

```

```

if (BYPASS(TOKEN_LEFT_PAREN)) then
  if (EXPRESSION) then
    if (BYPASS(TOKEN_RIGHT_PAREN)) then
      null;
    else
      SYNTAX_ERROR("Attribute designator");
    end if;
    -- if bypass(token_right_paren) statement
  else
    SYNTAX_ERROR("Attribute designator");
  end if;
  -- if expression statement
end if;
  -- if bypass(token_left_paren) statement
return (TRUE);
elsif (BYPASS(TOKEN_DIGITS)) or else (BYPASS(TOKEN_DELTA)) then
  if (BYPASS(TOKEN_LEFT_PAREN)) then
    if (EXPRESSION) then
      if (BYPASS(TOKEN_RIGHT_PAREN)) then
        null;
      else
        SYNTAX_ERROR("Attribute designator");
      end if;
      -- if bypass(token_right_paren) statement
    else
      SYNTAX_ERROR("Attribute designator");
    end if;
    -- if expression statement
  end if;
  -- if bypass(token_left_paren) statement
  return (TRUE);
else
  return (FALSE);
end if;
  -- if bypass(token_identifier) statement
end ATTRIBUTE_DESIGNATOR;

```

```

-- INTEGER_TYPE_DEFINITION --> range RANGES
function INTEGER_TYPE_DEFINITION return boolean is
begin
  if (BYPASS(TOKEN_RANGE)) then
    if (RANGES) then
      return (TRUE);
    else
      SYNTAX_ERROR("Integer type definition");
    end if;
  else
    return (FALSE);
  end if;
end INTEGER_TYPE_DEFINITION;

```

```

-- DISCRETE_RANGE --> RANGES [CONSTRAINT ?]
function DISCRETE_RANGE return boolean is
begin
  if (RANGES) then

```

```

    if (CONSTRAINT) then
        null;
    end if;
    return (TRUE);
else
    return (FALSE);
end if;
end DISCRETE_RANGE;

```

```

-----

-- EXIT STATEMENT --> [NAME ?] [when EXPRESSION ?] ;
function EXIT_STATEMENT return boolean is
begin
    if (NAME) then
        null;
    end if;
    if (BYPASS(TOKEN_WHEN)) then
        if (EXPRESSION) then
            null;
        else
            SYNTAX_ERROR("Exit statement");
        end if;
    end if;
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end EXIT_STATEMENT;

```

```

-----

-- RETURN STATEMENT --> [EXPRESSION ?] ;
function RETURN_STATEMENT return boolean is
begin
    if (EXPRESSION) then
        null;
    end if;
    if (BYPASS(TOKEN_SEMICOLON)) then
        return (TRUE);
    else
        return (FALSE);
    end if;
end RETURN_STATEMENT;

```

```

-----

-- GOTO STATEMENT --> NAME ;
function GOTO_STATEMENT return boolean is
begin
    if (NAME) then

```

```

if (BYPASS(TOKEN_SEMICOLON)) then
    return (TRUE);
else
    SYNTAX_ERROR("Goto statement");
end if;
-- if bypass(token_semicolon)
else
    return (FALSE);
end if;
-- if name statement
end GOTO_STATEMENT;

```

```

-----
-- DELAY_STATEMENT --> SIMPLE_EXPRESSION ;
function DELAY_STATEMENT return boolean is
begin
    if (SIMPLE_EXPRESSION) then
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Delay statement");
        end if;
        -- if bypass(token_semicolon)
    else
        return (FALSE);
    end if;
    -- if simple_expression statement
end DELAY_STATEMENT;

```

```

-----
-- ABORT_STATEMENT --> NAME [, NAME]* ;
function ABORT_STATEMENT return boolean is
begin
    if (NAME) then
        while (BYPASS(TOKEN_COMMA)) loop
            if not (NAME) then
                SYNTAX_ERROR("Abort statement");
            end if;
            -- if not name statement
        end loop;
        if (BYPASS(TOKEN_SEMICOLON)) then
            return (TRUE);
        else
            SYNTAX_ERROR("Abort statement");
        end if;
        -- if bypass(token_semicolon)
    else
        return (FALSE);
    end if;
    -- if name statement
end ABORT_STATEMENT;

```

```

-----
-- RAISE_STATEMENT --> [NAME ?] ;
function RAISE_STATEMENT return boolean is
begin

```

```

if (NAME) then
    null;
end if;
if (BYPASS(TOKEN_SEMICOLON)) then
    return (TRUE);
else
    return (FALSE);
end if;
end RAISE_STATEMENT;

end PARSER_3;

```

```

--*****--
--
-- TITLE:      AN ADA SOFTWARE METRIC
--
-- MODULE NAME:  PACKAGE PARSER_4
-- DATE CREATED: 23 JUL 86
-- LAST MODIFIED: 30 MAY 87
--
-- AUTHORS:     LCDR JEFFREY L. NIEDER
--              LT KARL S. FAIRBANKS, JR.
--              LCDR PAUL M. HERZIG
-- DESCRIPTION: This package contains seven functions that
--              are the lowest level productions for our top-down,
--              recursive descent parser. Each function is preceded
--              by the grammar productions they are implementing.
--
--*****--

```

with BYPASS_FUNCTION, BYPASS_SUPPORT_FUNCTIONS, GLOBAL_PARSER, GLOBAL, TEXT
use BYPASS_FUNCTION, BYPASS_SUPPORT_FUNCTIONS, GLOBAL_PARSER, GLOBAL, TEXT

```

package PARSER_4 is
    function MULTIPLYING_OPERATOR return boolean;
    function BINARY_ADDING_OPERATOR return boolean;
    function RELATIONAL_OPERATOR return boolean;
    function ENUMERATION_TYPE_DEFINITION return boolean;
    function ENUMERATION_LITERAL return boolean;
    function FORMAL_PARAMETER return boolean;
    function SELECTOR return boolean;
end PARSER_4;

```

```

-----
-----

```

```

package body PARSER_4 is

```

```

-- MULTIPLYING_OPERATOR --> *
--
--> /
--> mod
--> rem
function MULTIPLYING_OPERATOR return boolean is
begin
put(RESULT_FILE, "In multiplying_operator "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_ASTERISK)) then
    return (TRUE);
elsif (BYPASS(TOKEN_SLASH)) then
    return (TRUE);
elsif (BYPASS(TOKEN_MOD)) then
    return (TRUE);
elsif (BYPASS(TOKEN_REM)) then
    return (TRUE);
else
    return (FALSE);
end if;
end MULTIPLYING_OPERATOR;

-----

-- BINARY_ADDING_OPERATOR --> +
--
--> -
--> &
function BINARY_ADDING_OPERATOR return boolean is
begin
put(RESULT_FILE, "In binary_adding_operator "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_PLUS)) then
    return (TRUE);
elsif (BYPASS(TOKEN_MINUS)) then
    return (TRUE);
elsif (BYPASS(TOKEN_AMPERSAND)) then
    return (TRUE);
else
    return (FALSE);
end if;
end BINARY_ADDING_OPERATOR;

-----

-- RELATIONAL_OPERATOR --> =
--
--> /=
--> <
--> <=
--> >
--> >=
function RELATIONAL_OPERATOR return boolean is
begin
put(RESULT_FILE, "In relational_operator "); new_line(RESULT_FILE);
if (BYPASS(TOKEN_EQUALS)) then
    return (TRUE);

```



```

elseif (BYPASS(TOKEN_NOT_EQUALS)) then
    return (TRUE);
elseif (BYPASS(TOKEN_LESS_THAN)) then
    return (TRUE);
elseif (BYPASS(TOKEN_LESS_THAN_EQUALS)) then
    return (TRUE);
elseif (BYPASS(TOKEN_GREATER_THAN)) then
    return (TRUE);
elseif (BYPASS(TOKEN_GREATER_THAN_EQUALS)) then
    return (TRUE);
else
    return (FALSE);
end if;
end RELATIONAL_OPERATOR;

```

```

-----
-- ENUMERATION_TYPE_DEFINITION --> (ENUMERATION_LITERAL
--                                     [, ENUMERATION_LITERAL]*)
function ENUMERATION_TYPE_DEFINITION return boolean is
begin
    put(RESULT_FILE, "In enumeration_type_definition "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_LEFT_PAREN)) then
        HENRY_WRITE_ENABLE := TRUE;
        if (ENUMERATION_LITERAL) then
            while (BYPASS(TOKEN_COMMA)) loop
                HENRY_WRITE_ENABLE := TRUE;
                if not (ENUMERATION_LITERAL) then
                    SYNTAX_ERROR("Enumeration type definition");
                end if;
                -- if not enumeration_literal
            end loop;
            if (BYPASS(TOKEN_RIGHT_PAREN)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Enumeration type definition");
            end if;
            -- if bypass(token_right_paren)
        else
            SYNTAX_ERROR("Enumeration type definition");
        end if;
        -- if enumeration_literal statement
    else
        return (FALSE);
    end if;
    -- if bypass(token_left_paren)
end ENUMERATION_TYPE_DEFINITION;

```

```

-----
-- ENUMERATION_LITERAL --> identifier
--                                     --> character_literal
function ENUMERATION_LITERAL return boolean is
begin
    put(RESULT_FILE, "In enumeration_literal "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_IDENTIFIER)) then

```

```

    return (TRUE);
elsif (BYPASS(TOKEN_CHARACTER_LITERAL)) then
    return (TRUE);
else
    return (FALSE);
end if;
end ENUMERATION_LITERAL;

```

```

-----

-- FORMAL_PARAMETER --> identifier =>
function FORMAL_PARAMETER return boolean is
begin
    put(RESULT_FILE, "In formal_parameter "); new_line(RESULT_FILE);
    LOOK_AHEAD_TOKEN := TOKEN_RECORD_BUFFER(TOKEN_ARRAY_INDEX + 1);
    if (ADJUST_LEXEME(LOOK_AHEAD_TOKEN.LEXEME,
        LOOK_AHEAD_TOKEN.LEXEME_SIZE - 1) = "=>") then
        if (BYPASS(TOKEN_IDENTIFIER)) then
            if (BYPASS(TOKEN_ARROW)) then
                return (TRUE);
            else
                SYNTAX_ERROR("Formal parameter");
            end if;
        -- if bypass(token_arrow)
        else
            SYNTAX_ERROR("Formal parameter");
        end if;
        -- if bypass(token_identifier)
    else
        return (FALSE);
    end if;
end FORMAL_PARAMETER;

```

```

-----

-- SELECTOR --> identifier
--             --> character_literal
--             --> string_literal
--             --> all
function SELECTOR return boolean is
begin
    put(RESULT_FILE, "In selector "); new_line(RESULT_FILE);
    if (BYPASS(TOKEN_IDENTIFIER)) then
        return (TRUE);
    elsif (BYPASS(TOKEN_CHARACTER_LITERAL)) then
        return (TRUE);
    elsif (BYPASS(TOKEN_STRING_LITERAL)) then
        return (TRUE);
    end if;
end SELECTOR;

```

```
elseif (BYPASS(TOKEN_ALL)) then
    return (TRUE);
else
    return (FALSE);
end if;
end SELECTOR;

end PARSER_4;
```

LIST OF REFERENCES

1. Perlis, Alan J., Frederick G., and Shaw, Mary, *Software Metrics: An Analysis and Evaluation* MIT Press, Cambridge, Massachusetts, 1981.
2. Henry, Sallie M., *Information Flow Metrics For The Evaluation Of Operating Systems' Structure* University Microfilms International, Ann Arbor, Michigan. 1979.
3. Parnas, David L., *Information Distribution Aspects of Design Methodology for Computer Systems*. Proceedings of the 1971 IFIP Congress 1971:339-344.
4. Parnas, David L., *A Technique for Software Module Specifications with Examples* Comm. ACM 15, 5:330-336, 1971.
5. Neider, Jeffrey L., Fairbanks, Karl S., *AdaMeasure: AN Ada SOFTWARE METRIC* Naval Postgraduate School, Monterey, California, March 1987.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Technical Information Center Cameron Station Alexandria, Virginia 22304-6145	2
2.	Library, Code 0142 Naval Postgraduate School Monterey, California 93943-5002	2
3.	Dr. Daniel L. Davis Code 52DV Department of Computer Science Naval Postgraduate School Monterey, California 93943	2
4.	Dr. Bruce J. MacClennan Code 52ML Department of Computer Science Naval Postgraduate School Monterey, California 93943	1
5.	Lieutenant Commander Paul Herzig 578-C Schubrick Rd Monterey California 93940	1
6.	Chairman (Code 52) Department of Computer Science Naval Postgraduate School Monterey, California 93943	1
7.	Computer Technology Curricular Officer (Code 37) Naval Postgraduate School Monterey, California 93943	1
8.	Chief of Naval Operations Director, Information Systems (OP 945) Navy Department Washington, D.C. 20350-2000	1


		No. Copies
9.	Mr. Carl Hall Software Missile Branch, Code 3922 Naval Weapons Center China Lake, California 93555-6001	1
10.	Mr. Robert Westbrook CMDR 31C Naval Weapons Center China Lake, California 93555-6001	1

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIFORNIA 93943-6002

Thesis
H52128 Herzig
c.1 AdaMeasure: an imple-
mentation of the Halstead
and Henry metrics.

Thesis
H52128 Herzig
c.1 AdaMeasure: an imple-
mentation of the Halstead
and Henry metrics.

thesH52128
AdaMeasure:



3 2768 000 73047 7
DUDLEY KNOX LIBRARY